


SUBMITTAL INFORMATION

Stainless Steel Tapping Sleeve - (FTSAS-xxxx-xx-MJ style)



TAPPING SLEEVE WITH MECHANICAL JOINT OUTLET



Connecting Gasket - NBR (Buna-N) per ASTM D2000

MJ Adapter Outlet - Compatible with AWWA C111 Mechanical Joint fittings

Support Ring - Type 304 stainless steel. Optional carbon steel available

3/4-14 No-Lead Brass Test Plug

Bolts, Nuts, & Washers - Type 304 stainless steel per ASTM A193 and A194. Heavy hex nuts and washers are coated to prevent galling and maximize bolt efficiency

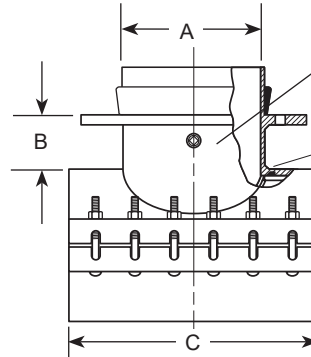

Outlet Pipe - Type 304 stainless steel

Gasket - NBR (Buna-N) per ASTM D2000

Body - Type 304 stainless steel with recessed grooves to retain gaskets.

NOM PIPE SIZE	SLEEVE OD RANGE (IN.)	OUTLET SIZE CODE	NOMINAL DIMENSIONS - INCHES			MIN. NO. OF BOLTS	APPROX WEIGHT LBS.	SLEEVE NUMBER	✓ SUBMITTED ITEM(S)
			A	B	C				
20"	21.51-22.15 22.16-22.81 23.46-24.16 24.82-25.52	3	3-1/4	5-3/16	16	10	248	FTSAS-2215-xx-MJ FTSAS-2281-xx-MJ FTSAS-2416-xx-MJ FTSAS-2552-xx-MJ	
		4	4-1/4	5-3/16	16	10	249		
		6	6-13/32	5-1/2	16	10	252		
		8	8-13/32	5-5/8	20	10	257		
		10	10-27/64	6-1/8	20	12	279		
		12	12-27/64	6-1/4	24	14	310		
		14	14	6-1/4	24	14	321		
		16	16	6-1/4	32	20	377		
		18	18	6-1/4	36	24	502		
24"	25.71-26.41 26.55-27.25 27.26-27.96 28.14-28.84	20	20	6-1/4	40	24	532	FTSAS-2641-xx-MJ FTSAS-2725-xx-MJ FTSAS-2796-xx-MJ FTSAS-2884-xx-MJ	
		3	3-1/4	5-3/16	16	10	267		
		4	4-1/4	5-3/16	16	10	268		
		6	6-13/32	5-1/2	16	10	271		
		8	8-13/32	5-5/8	20	10	276		
		10	10-27/64	6-1/8	20	12	304		
		12	12-27/64	6-1/4	24	14	339		
		14	14	6-1/4	24	14	351		
		16	16	6-1/4	32	20	414		
		18	18	6-1/4	36	24	523		
		20	20	6-1/4	40	24	586		
		24	24	6-1/4	48	28	727		

* The complete FTSAS catalog number for a 20" pipe (21.60 O.D.) with a 16" stainless steel flange is FTSAS-2215-16-MJ. For carbon steel flange, add "A" to the catalog number. Example: FTSAS-2215-16A-MJ.

Note: A 1" undersize cutter is required for flanges 14" and larger. Oversize outlets are available by special request.

FEATURES

- Body, straps and UNC threaded bolts are made of type 304 stainless steel. Support ring can be either type 304 stainless steel or ASTM A36 carbon steel. All welds are fully passivated for corrosion resistance.
- Outlet and connecting gaskets are NBR (Buna-N) per ASTM D2000.
- Other sizes and ranges available. Contact your Ford Meter Box representative for details.
- Removable bolts
- Certified to ANSI/NSF 61
- Rated for 250 psi up to 24" outlets. Ratings not to exceed the rating of the pipe.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

03/25/24

Submitted By: