



SUBMITTAL INFORMATION

Steel Tapping Sleeve - (FTSC-xxx-TAP-AH-BBN style)



STEEL TAPPING SLEEVE (EPOXY COATED) WITH BLUE FLUOROCARBON COATED STEEL HARDWARE - 4" TO 16"

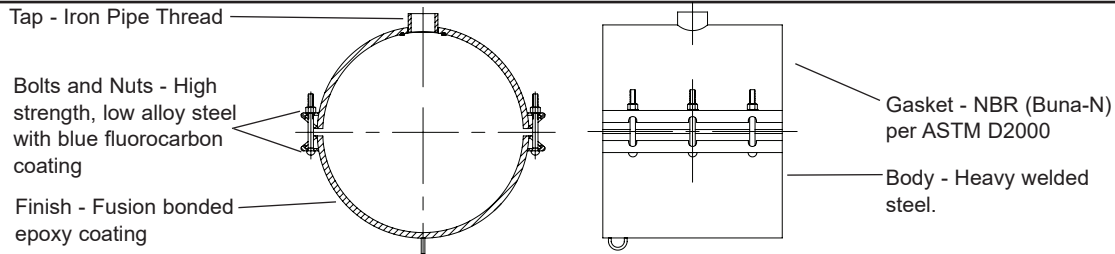

NOM. PIPE SIZE	SLEEVE O.D. RANGE (IN.)	BY	OUTLET SIZE	SLEEVE NUMBER*	✓SUBMITTED ITEM(S)
4"	4.50-4.80		3/4" - IP3	FTSC-480-TAP-AH-BBN	
			1" - IP4		
			1-1/2" - IP6		
			2" - IP7		
			3" - IP9		
			4" - IP11		
6"	6.57-6.73 6.83-7.16 7.20-7.60 7.40-7.73		6" - IP13	FTSC-673-TAP-AH-BBN FTSC-716-TAP-AH-BBN FTSC-760-TAP-AH-BBN FTSC-773-TAP-AH-BBN	
			3/4" - IP3		
			1" - IP4		
			1-1/2" - IP6		
			2" - IP7		
			3" - IP9		
8"	7.95-8.05 8.36-8.75 8.73-9.12 8.89-9.37 9.27-9.69		4" - IP11	FTSC-805-TAP-AH-BBN FTSC-875-TAP-AH-BBN FTSC-912-TAP-AH-BBN FTSC-937-TAP-AH-BBN FTSC-969-TAP-AH-BBN	
			6" - IP13		
			3/4" - IP3		
			1" - IP4		
			1-1/2" - IP6		
			2" - IP7		
10"	9.95-10.10 10.45-10.88 11.03-11.47 11.36-11.80		3" - IP9	FTSC-1010-TAP-AH-BBN FTSC-1088-TAP-AH-BBN FTSC-1147-TAP-AH-BBN FTSC-1180-TAP-AH-BBN	
			4" - IP11		
			6" - IP13		
			3/4" - IP3		
			1" - IP4		
			1-1/2" - IP6		
12"	11.76-12.20 12.42-12.88 13.13-13.60 13.60-14.09 14.10-14.58		2" - IP7	FTSC-1220-TAP-AH-BBN FTSC-1288-TAP-AH-BBN FTSC-1360-TAP-AH-BBN FTSC-1409-TAP-AH-BBN FTSC-1458-TAP-AH-BBN	
			3" - IP9		
			4" - IP11		
			6" - IP13		
			3/4" - IP3		
			1" - IP4		
14"-16"	14.59-15.08 15.23-15.72 15.73-16.22 16.30-16.73 16.74-17.26		1-1/2" - IP6	FTSC-1508-TAP-AH-BBN FTSC-1572-TAP-AH-BBN FTSC-1622-TAP-AH-BBN FTSC-1673-TAP-AH-BBN FTSC-1726-TAP-AH-BBN	
			2" - IP7		
			3" - IP9		
			4" - IP11		
			3/4" - IP3		
			1" - IP4		

*To Order: Add outlet size to sleeve number. Example: A 3" outlet on 12" ductile iron pipe would be FTSC-1360-IP9-AH-BBN.

FEATURES

- Heavy welded steel meeting ASTM A36 36,000 psi minimum yield.
- Bolts and nuts - High strength, low alloy steel per ASTM A242 and AWWA C111 with blue fluorocarbon coating.
- Ring style gasket - NBR (Buna-N) per ASTM D2000
- Finish - Fusion bonded epoxy coating - NSF 61 approved
- Rated for 250 psi up to 24" outlets. 30"-36" outlets rated for 200 psi. Ratings not to exceed the rating of the pipe.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

06/01/22

Submitted By: