


SUBMITTAL INFORMATION

Steel Tapping Sleeve - (FTSC-xxx-x-EPDM-U100 style)





STEEL TAPPING SLEEVE - 4" TO 16"

Flange - ASTM A36 carbon steel with recess per MSS SP-60 to accept standard tapping valve. Flange conforms to AWWA C207.

3/4-14 No-Lead Brass Test Plug

Bolts and Nuts -
Type 304 stainless steel

Finish - Fusion-bonded epoxy
coating

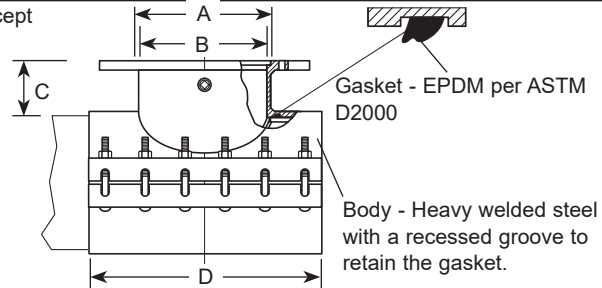

NOM. PIPE SIZE	SLEEVE O.D. RANGE (IN.)	BY	FLANGE SIZE CODE*	NOMINAL DIMENSIONS - INCHES				MIN. NO. OF BOLTS	BOLT DIA.	APPROX. WT. LBS.	SLEEVE NUMBER*	✓ SUBMITTED ITEM(S)
				COUNTER- BORE ID	OUTLET PIPE ID	TOP OF PIPE TO TOP OF FLANGE	WIDTH					
4"	4.50-4.80		2	3-3/64	2-1/16	5-1/16	12	8	5/8	43	*FTSC-480-x-EPDM-U100	
				4-3/64	3-1/16	5-1/16	12	8	5/8	44		
				5-3/64	4-1/8	5-1/16	12	8	5/8	45		
6"	6.57-6.73 6.83-7.16 7.20-7.60 7.40-7.73		2	3-3/64	2-1/16	5-1/16	12	6	3/4	65	*FTSC-673-x-EPDM-U100 FTSC-716-x-EPDM-U100 FTSC-760-x-EPDM-U100 FTSC-773-x-EPDM-U100	
				4-3/64	3-1/16	5-1/16	12	6	3/4	67		
				5-3/64	4-1/8	5-1/16	12	6	3/4	70		
				7-3/64	6-1/4	5-1/16	12	6	3/4	75		
				8-3/64	8-1/4	5-1/16	12	6	3/4	71		
8"	7.95-8.05 8.36-8.75 8.73-9.12 8.89-9.37 9.27-9.69		2	3-3/64	2-1/16	5-3/16	12	6	3/4	71	**FTSC-805-x-EPDM-U100 *FTSC-875-x-EPDM-U100 FTSC-912-x-EPDM-U100 FTSC-937-x-EPDM-U100 FTSC-969-x-EPDM-U100	
				4-3/64	3-1/16	5-3/16	12	6	3/4	73		
				5-3/64	4-1/8	5-3/16	12	6	3/4	76		
				7-3/64	6-1/4	5-3/16	12	6	3/4	86		
				9-3/64	8-1/4	5-3/16	16	8	3/4	93		
10"	9.95-10.10 10.45-10.88 11.03-11.47 11.36-11.80		2	3-3/64	2-1/16	5-3/16	12	6	3/4	79	**FTSC-1010-x-EPDM-U100 FTSC-1088-x-EPDM-U100 FTSC-1147-x-EPDM-U100 FTSC-1180-x-EPDM-U100	
				4-3/64	3-1/16	5-3/16	12	6	3/4	81		
				5-3/64	4-1/8	5-3/16	12	6	3/4	84		
				7-3/64	6-1/4	5-3/16	12	6	3/4	93		
				9-3/64	8-1/4	5-3/16	16	8	3/4	130		
12"	11.76-12.20 12.42-12.88 13.13-13.60 13.60-14.09 14.10-14.58		2	3-3/64	2-1/16	5-3/16	12	6	3/4	139	**FTSC-1220-x-EPDM-U100 FTSC-1288-x-EPDM-U100 FTSC-1360-x-EPDM-U100 FTSC-1409-x-EPDM-U100 FTSC-1458-x-EPDM-U100	
				4-3/64	3-1/16	5-3/16	12	6	3/4	87		
				5-3/64	4-1/8	5-3/16	12	6	3/4	89		
				7-3/64	6-1/4	5-3/16	12	6	3/4	92		
				9-3/64	8-1/4	5-3/16	16	8	3/4	100		
				11-3/64	10-1/4	5-3/16	20	10	3/4	140		
				13-3/64	12-1/4	5-3/16	24	12	3/4	190		
14"- 16"	14.59-15.08 14.81-15.30 15.23-15.72 15.73-16.22 16.30-16.73 16.74-17.26		2	3-3/64	2-1/16	5-3/16	12	6	3/4	199	**FTSC-1508-x-EPDM-U100 FTSC-1530-x-EPDM-U100 FTSC-1572-x-EPDM-U100 FTSC-1622-x-EPDM-U100 FTSC-1673-x-EPDM-U100 FTSC-1726-x-EPDM-U100	
				4-3/64	3-1/16	5-3/16	12	6	3/4	94		
				5-3/64	4-1/8	5-3/16	12	6	3/4	96		
				7-3/64	6-1/4	5-3/16	12	6	3/4	99		
				9-3/64	8-1/4	5-3/16	16	8	3/4	110		
				11-3/64	10-1/4	5-3/16	20	10	3/4	152		
				13-3/64	12-1/4	5-3/16	24	12	3/4	203		
				15-5/16	13-1/2	6-1/4	28	14	3/4	228		
										253		

* Size on size taps for these units may require a 1/2" under size cutter.

** Size on size for this range not available.

*** **To order:** Add flange size code to the sleeve number. Example: A 4" flange on 6" cast iron pipe would be FTSC-716-4-EPDM-U100.

Note: A 1" undersize cutter is required for flanges 14" and larger. Oversize outlets are available by special request.

FEATURES

- Heavy welded steel meeting ASTM A36 36,000 psi minimum yield
- Bolts and nuts are made of type 304 stainless steel per ASTM A193 and A194
- Ring style gasket is EPDM per ASTM D2000
- Fusion-bonded epoxy-coating
- Certified to ANSI/NSF Standard 61
- Rated for 250 psi up to 24" outlets. Ratings not to exceed the rating of the pipe.
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

01/04/23

Submitted By: