



SUBMITTAL INFORMATION

Steel Tapping Sleeve - (FTSC-xxx-x-MJ-AH-BBN style)



STEEL TAPPING SLEEVE (EPOXY COATED WITH BLUE FLUOROCARBON COATED HARDWARE) 4" TO 16" WITH MECHANICAL JOINT OUTLET

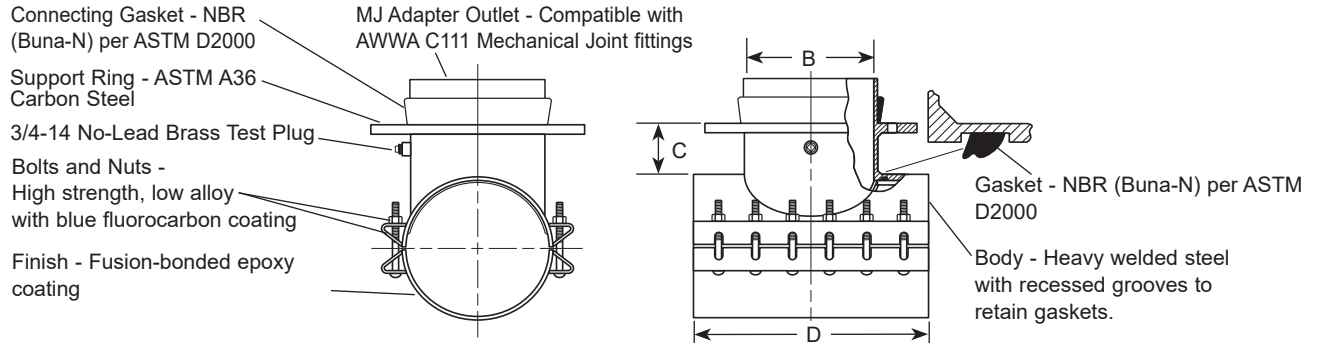

NOM. PIPE SIZE	SLEEVE O.D. RANGE (IN.)	BY	OUTLET SIZE CODE***	NOMINAL DIMENSIONS - INCHES			MIN. NO. OF BOLTS	APPROX. WT. LBS.	SLEEVE NUMBER***	✓ SUBMITTED ITEM(S)
				B	C	D				
4"	4.50 4.80		3	3-1/4	5-1/16	12	8	40	*FTSC-450-x-MJ-AH-BBN	
			4	4-1/4	5-1/16	12		41	*FTSC-480-x-MJ-AH-BBN	
6"	6.57-6.73 6.83-7.16 7.20-7.60 7.40-7.73		3	3-1/4	5-3/16	12	6	64	*FTSC-673-x-MJ-AH-BBN	
			4	4-1/4	5-3/16	12		65	FTSC-716-x-MJ-AH-BBN	
			6	6-13/32	5-3/16	12		72	FTSC-760-x-MJ-AH-BBN FTSC-773-x-MJ-AH-BBN	
8"	7.95-8.05 8.36-8.75 8.73-9.12 8.89-9.37 9.27-9.69		3	3-1/4	5-3/16	12	6	72	**FTSC-805-x-MJ-AH-BBN	
			4	4-1/4	5-3/16	12		73	*FTSC-875-x-MJ-AH-BBN	
			6	6-13/32	5-3/16	12		79	FTSC-912-x-MJ-AH-BBN FTSC-937-x-MJ-AH-BBN	
			8	8-13/32	5-3/16	16	8	106	FTSC-969-x-MJ-AH-BBN	
10"	9.95-10.10 10.45-10.88 11.03-11.47 11.36-11.80		3	3-1/4	5-3/16	12	6	81	**FTSC-1010-x-MJ-AH-BBN	
			4	4-1/4	5-3/16	12		82	FTSC-1088-x-MJ-AH-BBN	
			6	6-13/32	5-3/16	12		87	FTSC-1147-x-MJ-AH-BBN	
			8	8-13/32	5-3/16	16	8	117	FTSC-1180-x-MJ-AH-BBN	
			10	10-27/64	5-3/16	20	10	153		
12"	11.76-12.20 12.42-12.88 13.13-13.60 13.60-14.09 14.10-14.58		3	3-1/4	5-3/16	12	6	92	**FTSC-1220-x-MJ-AH-BBN	
			4	4-1/4	5-3/16	12		93	FTSC-1288-x-MJ-AH-BBN	
			6	6-13/32	5-3/16	12		98	FTSC-1360-x-MJ-AH-BBN	
			8	8-13/32	5-3/16	16	8	130	FTSC-1409-x-MJ-AH-BBN	
			10	10-27/64	5-3/16	20	10	169	FTSC-1458-x-MJ-AH-BBN	
14"-16"	14.59-15.08 15.23-15.72 15.73-16.22 16.30-16.73 16.74-17.26		12	12-27/64	5-3/16	24	12	216		
			3	3-1/4	5-3/16	12	6	98	**FTSC-1508-x-MJ-AH-BBN	
			4	4-1/4	5-3/16	12		99	FTSC-1572-x-MJ-AH-BBN	
			6	6-13/32	5-3/16	12		105	FTSC-1622-x-MJ-AH-BBN	
			8	8-13/32	5-3/16	16	8	139	FTSC-1673-x-MJ-AH-BBN	
			10	10-27/64	5-3/16	20	10	178	FTSC-1726-x-MJ-AH-BBN	
			12	12-27/64	5-3/16	24	12	230		

*Size on size taps for these units may require a 1/2" under size cutter.

** Size on size for this range not available.

*** **To order:** Add outlet size code to the sleeve number. Example: A 4" outlet on 6" cast iron pipe would be FTSC-716-4-MJ-AH-BBN.

FEATURES

- Heavy welded steel meeting ASTM A36 36,000 psi minimum yield
- Bolts and nuts are made of high strength, low alloy steel per ASTM A242 and AWWA C111 with blue fluorocarbon coating
- Fusion-bonded epoxy-coating on body
- Certified to ANSI/NSF 61
- Rated for up to 250 psi. Rating not to exceed the pressure rating of the pipe.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

08/08/22

Submitted By: