



# SUBMITTAL INFORMATION

## Steel Tapping Sleeve - (FTSC-xxx-x-MJ-U100 style)



### STEEL TAPPING SLEEVE - EPOXY COATED WITH 304 STAINLESS HARDWARE - 4" TO 16" WITH MECHANICAL JOINT OUTLET

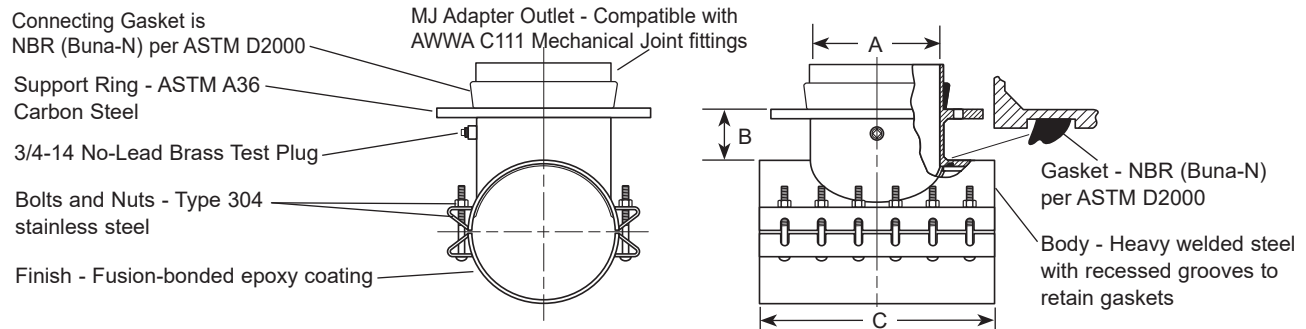

| NOM.<br>PIPE<br>SIZE | SLEEVE<br>O.D. RANGE<br>(IN.)                                           | BY          | OUTLET<br>SIZE<br>CODE*** | NOMINAL DIMENSIONS - INCHES |        |                    | MIN. NO.<br>OF<br>BOLTS | APPROX.<br>WT. LBS. | SLEEVE<br>NUMBER***   | ✓ SUBMITTED<br>ITEM(S) |
|----------------------|-------------------------------------------------------------------------|-------------|---------------------------|-----------------------------|--------|--------------------|-------------------------|---------------------|-----------------------|------------------------|
|                      |                                                                         |             |                           | A                           | B      | C                  |                         |                     |                       |                        |
| 4"                   | 4.50<br>4.80                                                            | <div></div> | 3                         | 3-1/4                       | 5-1/16 | 12                 | 8                       | 40                  | *FTSC-450-x-MJ-U100   |                        |
|                      |                                                                         |             | 4                         | 4-1/4                       | 5-1/16 | 12                 |                         | 41                  | *FTSC-480-x-MJ-U100   |                        |
| 6"                   | 6.57-6.73<br>6.83-7.16<br>7.20-7.60<br>7.40-7.73                        | <div></div> | 3                         | 3-1/4                       | 5-3/16 | 12                 | 6                       | 64                  | *FTSC-673-x-MJ-U100   |                        |
|                      |                                                                         |             | 4                         | 4-1/4                       | 5-3/16 | 12                 |                         | 65                  | FTSC-716-x-MJ-U100    |                        |
|                      |                                                                         |             | 6                         | 6-13/32                     | 5-3/16 | 12                 |                         | 72                  | FTSC-760-x-MJ-U100    |                        |
|                      |                                                                         |             |                           |                             |        |                    |                         | 72                  | FTSC-773-x-MJ-U100    |                        |
| 8"                   | 7.95-8.05<br>8.36-8.75<br>8.73-9.12<br>8.89-9.37<br>9.27-9.69           | <div></div> | 3                         | 3-1/4                       | 5-3/16 | 12                 | 6                       | 72                  | **FTSC-805-x-MJ-U100  |                        |
|                      |                                                                         |             | 4                         | 4-1/4                       | 5-3/16 | 12                 |                         | 73                  | *FTSC-875-x-MJ-U100   |                        |
|                      |                                                                         |             | 6                         | 6-13/32                     | 5-3/16 | 12                 |                         | 79                  | FTSC-912-x-MJ-U100    |                        |
|                      |                                                                         |             |                           |                             |        |                    |                         | FTSC-937-x-MJ-U100  |                       |                        |
| 8                    | 8-13/32                                                                 | 5-3/16      | 16                        | 8                           | 106    | FTSC-969-x-MJ-U100 |                         |                     |                       |                        |
| 10"                  | 9.95-10.10<br>10.45-10.88<br>11.03-11.47<br>11.36-11.80                 | <div></div> | 3                         | 3-1/4                       | 5-3/16 | 12                 | 6                       | 81                  | **FTSC-1010-x-MJ-U100 |                        |
|                      |                                                                         |             | 4                         | 4-1/4                       | 5-3/16 | 12                 |                         | 82                  | FTSC-1088-x-MJ-U100   |                        |
|                      |                                                                         |             | 6                         | 6-13/32                     | 5-3/16 | 12                 |                         | 87                  | FTSC-1147-x-MJ-U100   |                        |
|                      |                                                                         |             | 8                         | 8-13/32                     | 5-3/16 | 16                 | 8                       | 117                 | FTSC-1180-x-MJ-U100   |                        |
|                      |                                                                         |             | 10                        | 10-27/64                    | 5-3/16 | 20                 | 10                      | 153                 |                       |                        |
| 12"                  | 11.76-12.20<br>12.42-12.88<br>13.13-13.60<br>13.60-14.09<br>14.10-14.58 | <div></div> | 3                         | 3-1/4                       | 5-3/16 | 12                 | 6                       | 92                  | **FTSC-1220-x-MJ-U100 |                        |
|                      |                                                                         |             | 4                         | 4-1/4                       | 5-3/16 | 12                 |                         | 93                  | FTSC-1288-x-MJ-U100   |                        |
|                      |                                                                         |             | 6                         | 6-13/32                     | 5-3/16 | 12                 |                         | 98                  | FTSC-1360-x-MJ-U100   |                        |
|                      |                                                                         |             | 8                         | 8-13/32                     | 5-3/16 | 16                 | 8                       | 130                 | FTSC-1409-x-MJ-U100   |                        |
|                      |                                                                         |             | 10                        | 10-27/64                    | 5-3/16 | 20                 | 10                      | 169                 | FTSC-1458-x-MJ-U100   |                        |
|                      |                                                                         |             | 12                        | 12-27/64                    | 5-3/16 | 24                 | 12                      | 216                 |                       |                        |
| 14"-16"              | 14.59-15.08<br>15.23-15.72<br>15.73-16.22<br>16.30-16.73<br>16.74-17.26 | <div></div> | 3                         | 3-1/4                       | 5-3/16 | 12                 | 6                       | 98                  | **FTSC-1508-x-MJ-U100 |                        |
|                      |                                                                         |             | 4                         | 4-1/4                       | 5-3/16 | 12                 |                         | 99                  | FTSC-1572-x-MJ-U100   |                        |
|                      |                                                                         |             | 6                         | 6-13/32                     | 5-3/16 | 12                 |                         | 105                 | FTSC-1622-x-MJ-U100   |                        |
|                      |                                                                         |             | 8                         | 8-13/32                     | 5-3/16 | 16                 | 8                       | 139                 | FTSC-1673-x-MJ-U100   |                        |
|                      |                                                                         |             | 10                        | 10-27/64                    | 5-3/16 | 20                 | 10                      | 178                 | FTSC-1726-x-MJ-U100   |                        |
|                      |                                                                         |             | 12                        | 12-27/64                    | 5-3/16 | 24                 | 12                      | 230                 |                       |                        |

\*Size on size taps for these units may require a 1/2" under size cutter.

\*\* Size on size for this range not available.

\*\*\* To order: Add outlet size code to the sleeve number. Example: A 4" outlet on 6" cast iron pipe would be FTSC-716-4-MJ-U100.

#### FEATURES

- Heavy welded steel meeting ASTM A36 36,000 psi minimum yield
- Hardware - Type 304 stainless steel per ASTM A193 and A194
- Finish - Fusion-bonded epoxy-coating
- Certified to ANSI/NSF 61
- Rated for up to 250 psi. Rating not to exceed the pressure rating of the pipe.
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

08/08/22

Submitted By: