


SUBMITTAL INFORMATION

Steel Tapping Sleeve - (FTSC-xxx-x-MJ style)



STEEL TAPPING SLEEVE - EPOXY COATED WITH 304 STAINLESS HARDWARE - 4" TO 16" WITH MECHANICAL JOINT OUTLET

Connecting Gasket is
NBR (Buna-N) per ASTM D2000


Support Ring - ASTM A36
Carbon Steel

3/4-14 No-Lead Brass Test Plug

Bolts and Nuts - Type 304
stainless steel

Finish - Fusion-bonded epoxy
coating

MJ Adapter Outlet - Compatible with
AWWA C111 Mechanical Joint fittings

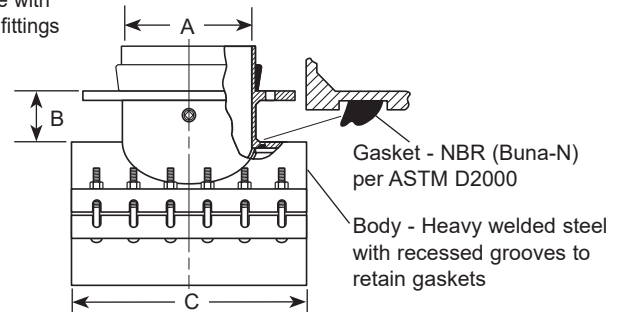

NOM. PIPE SIZE	SLEEVE O.D. RANGE (IN.)	BY	OUTLET SIZE CODE***	NOMINAL DIMENSIONS - INCHES			MIN. NO. OF BOLTS	APPROX. WT. LBS.	SLEEVE NUMBER***	✓ SUBMITTED ITEM(S)
				A	B	C				
4"	4.50		3	3-1/4	5-1/16	12	8	40	*FTSC-450-x-MJ	
	4.80		4	4-1/4	5-1/16	12		41	*FTSC-480-x-MJ	
6"	6.57-6.73		3	3-1/4	5-3/16	12	6	64	*FTSC-673-x-MJ	
	6.83-7.16		4	4-1/4	5-3/16	12		65	FTSC-716-x-MJ	
	7.20-7.60		6	6-13/32	5-3/16	12		72	FTSC-760-x-MJ	
7.40-7.73	FTSC-773-x-MJ									
8"	7.95-8.05		3	3-1/4	5-3/16	12	6	72	**FTSC-805-x-MJ	
	8.36-8.75		4	4-1/4	5-3/16	12		73	*FTSC-875-x-MJ	
	8.73-9.12		6	6-13/32	5-3/16	12		79	FTSC-912-x-MJ	
	8.89-9.37							FTSC-937-x-MJ		
	9.27-9.69		8	8-13/32	5-3/16	16	8	106	FTSC-969-x-MJ	
10"	9.95-10.10		3	3-1/4	5-3/16	12	6	81	**FTSC-1010-x-MJ	
	10.45-10.88		4	4-1/4	5-3/16	12		82	FTSC-1088-x-MJ	
	11.03-11.47		6	6-13/32	5-3/16	12		87	FTSC-1147-x-MJ	
	11.36-11.80		8	8-13/32	5-3/16	16	8	117	FTSC-1180-x-MJ	
			10	10-27/64	5-3/16	20	10	153		
12"	11.76-12.20		3	3-1/4	5-3/16	12	6	92	**FTSC-1220-x-MJ	
	12.42-12.88		4	4-1/4	5-3/16	12		93	FTSC-1288-x-MJ	
	13.13-13.60		6	6-13/32	5-3/16	12		98	FTSC-1360-x-MJ	
	13.60-14.09		8	8-13/32	5-3/16	16	8	130	FTSC-1409-x-MJ	
	14.10-14.58		10	10-27/64	5-3/16	20	10	169	FTSC-1458-x-MJ	
			12	12-27/64	5-3/16	24	12	216		
14"-16"	14.59-15.08		3	3-1/4	5-3/16	12	6	98	**FTSC-1508-x-MJ	
	15.23-15.72		4	4-1/4	5-3/16	12		99	FTSC-1572-x-MJ	
	15.73-16.22		6	6-13/32	5-3/16	12		105	FTSC-1622-x-MJ	
	16.30-16.73		8	8-13/32	5-3/16	16	8	139	FTSC-1673-x-MJ	
	16.74-17.26		10	10-27/64	5-3/16	20	10	178	FTSC-1726-x-MJ	
			12	12-27/64	5-3/16	24	12	230		

*Size on size taps for these units may require a 1/2" under size cutter.

** Size on size for this range not available.

*** To order: Add outlet size code to the sleeve number. Example: A 4" outlet on 6" cast iron pipe would be FTSC-716-4-MJ.

FEATURES

- Heavy welded steel meeting ASTM A36 36,000 psi minimum yield
- Bolts and nuts are made of type 304 stainless steel
- Fusion-bonded epoxy-coating on body
- Certified to ANSI/NSF 61
- Rated for up to 250 psi. Rating not to exceed the pressure rating of the pipe.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

08/08/22

Submitted By: