


SUBMITTAL INFORMATION

Steel Tapping Sleeve - (FTSC-xxx-x-Z-U100 style)





STEEL TAPPING SLEEVE WITH 316 STAINLESS HARDWARE

Flange - ASTM A36 carbon steel with recess per MSS SP-60 to accept standard tapping valve. Flange conforms to AWWA C207.

3/4-14 No-Lead Brass
Test Plug

Bolts and Nuts -
Type 316 stainless steel

Finish - Fusion-bonded epoxy

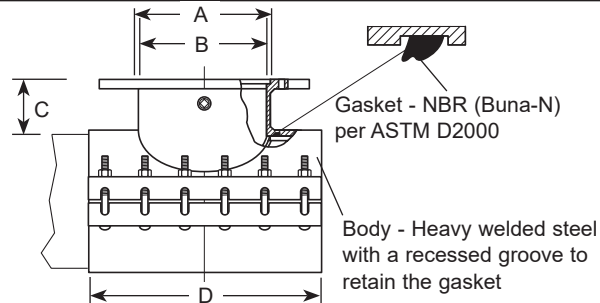

NOM. PIPE SIZE (IN.)	SLEEVE O.D. RANGE (IN.)	BY	FLANGE SIZE CODE*	NOMINAL DIMENSIONS - INCHES				MIN. NO. OF BOLTS	BOLT DIA. (IN.)	APPROX. WT. LBS.	SLEEVE NUMBER*	✓ SUBMITTED ITEM(S)
				COUNTER- BORE ID	OUTLET PIPE ID	TOP OF PIPE TO TOP OF FLANGE	WIDTH					
4	4.50-4.80		2	3-3/64	2-1/16	5-1/16	12	8	5/8	43	*FTSC-480-x-Z-U100	
			3	4-3/64	3-1/16	5-1/16	12	8	5/8	44		
			4	5-3/64	4-1/8	5-1/16	12	8	5/8	45		
6	6.57-6.73 6.83-7.16 7.20-7.60 7.40-7.73		2	3-3/64	2-1/16	5-1/16	12	6	3/4	65	*FTSC-673-x-Z-U100 FTSC-716-x-Z-U100 FTSC-760-x-Z-U100 FTSC-773-x-Z-U100	
			3	4-3/64	3-1/16	5-1/16	12	6	3/4	67		
			4	5-3/64	4-1/8	5-1/16	12	6	3/4	70		
			6	7-3/64	6-1/4	5-1/16	12	6	3/4	75		
8	7.95-8.05 8.36-8.75 8.73-9.12 8.89-9.37 9.27-9.69		2	3-3/64	2-1/16	5-3/16	12	6	3/4	71	**FTSC-805-x-Z-U100 *FTSC-875-x-Z-U100 FTSC-912-x-Z-U100 FTSC-937-x-Z-U100 FTSC-969-x-Z-U100	
			3	4-3/64	3-1/16	5-3/16	12	6	3/4	73		
			4	5-3/64	4-1/8	5-3/16	12	6	3/4	76		
			6	7-3/64	6-1/4	5-3/16	12	6	3/4	86		
			8	9-3/64	8-1/4	5-3/16	16	8	3/4	93		
10	9.95-10.10 10.45-10.88 11.03-11.47 11.36-11.80		2	3-3/64	2-1/16	5-3/16	12	6	3/4	79	**FTSC-1010-x-Z-U100 FTSC-1088-x-Z-U100 FTSC-1147-x-Z-U100 FTSC-1180-x-Z-U100	
			3	4-3/64	3-1/16	5-3/16	12	6	3/4	81		
			4	5-3/64	4-1/8	5-3/16	12	6	3/4	84		
			6	7-3/64	6-1/4	5-3/16	12	6	3/4	93		
			8	9-3/64	8-1/4	5-3/16	16	8	3/4	130		
12	11.76-12.20 12.42-12.88 13.13-13.60 13.60-14.09 14.10-14.58		10	11-3/64	10-1/4	5-3/16	20	10	3/4	139	**FTSC-1220-x-Z-U100 FTSC-1288-x-Z-U100 FTSC-1360-x-Z-U100 FTSC-1409-x-Z-U100 FTSC-1458-x-Z-U100	
			2	3-3/64	2-1/16	5-3/16	12	6	3/4	87		
			3	4-3/64	3-1/16	5-3/16	12	6	3/4	89		
			4	5-3/64	4-1/8	5-3/16	12	6	3/4	92		
			6	7-3/64	6-1/4	5-3/16	12	6	3/4	100		
			8	9-3/64	8-1/4	5-3/16	16	8	3/4	140		
			10	11-3/64	10-1/4	5-3/16	20	10	3/4	190		
14-16	14.59-15.08 14.81-15.30 15.23-15.72 15.73-16.22 16.30-16.73 16.74-17.26		12	13-3/64	12-1/4	5-3/16	24	12	3/4	199	**FTSC-1508-x-Z-U100 FTSC-1530-x-Z-U100 FTSC-1572-x-Z-U100 FTSC-1622-x-Z-U100 FTSC-1673-x-Z-U100 FTSC-1726-x-Z-U100	
			2	3-3/64	2-1/16	5-3/16	12	6	3/4	94		
			3	4-3/64	3-1/16	5-3/16	12	6	3/4	96		
			4	5-3/64	4-1/8	5-3/16	12	6	3/4	99		
			6	7-3/64	6-1/4	5-3/16	12	6	3/4	110		
			8	9-3/64	8-1/4	5-3/16	16	8	3/4	152		
			10	11-3/64	10-1/4	5-3/16	20	10	3/4	203		
			12	13-3/64	12-1/4	5-3/16	24	12	3/4	228		
			14	15-5/16	13-1/2	6-1/4	28	14	3/4	253		

* Size on size taps for these units may require a 1/2" under size cutter.

** Size on size for this range not available.

*** **To order:** Add flange size code to the sleeve number. Example: A 4" flange on 6" cast iron pipe would be FTSC-716-4-Z-U100.

Note: A 1" undersize cutter is required for flanges 14" and larger. Oversize outlets are available by special request.

FEATURES

- Heavy welded steel meeting ASTM A36 36,000 psi minimum yield
- Bolts and nuts are made of type 316 stainless steel per ASTM A193 and A194
- Ring style gasket is NBR (Buna-N) per ASTM D2000
- Fusion bonded epoxy coating on body
- Certified to NSF/ANSI 61
- Rated for 250 psi up to 24" outlets. Ratings not to exceed the rating of the pipe.
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

03/31/25

Submitted By: