


SUBMITTAL INFORMATION

Steel Tapping Sleeve - (FTSC-xxx-x style)




STEEL TAPPING SLEEVE - 4" TO 16"

Flange - ASTM A36 carbon steel with recess per MSS SP-60 to accept standard tapping valves. Flange conforms to AWWA C207.

3/4-14 No-Lead Brass
Test Plug

Bolts and Nuts -
Type 304 stainless steel per
ASTM A193 and A194

Finish - Fusion-bonded epoxy
coating no less than 12 mils thick

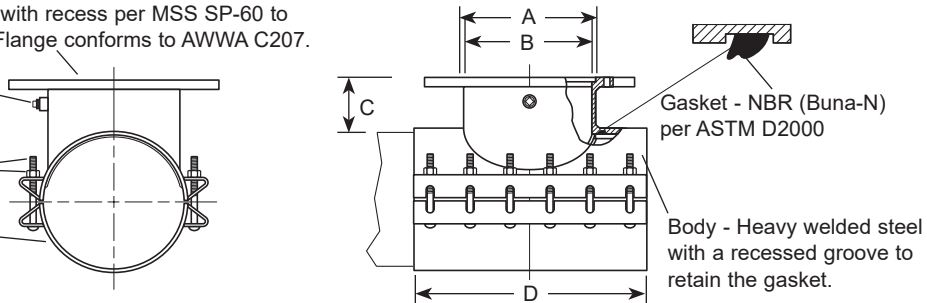

NOM. PIPE SIZE	SLEEVE O.D. RANGE (IN.)	BY	FLANGE SIZE CODE*	NOMINAL DIMENSIONS - INCHES				MIN. No. OF BOLTS	BOLT DIA.	APPROX. WT. LBS.	SLEEVE NUMBER*	✓ SUBMITTED ITEM(S)
				COUNTER- BORE ID	OUTLET PIPE ID	TOP OF PIPE TO TOP OF FLANGE	WIDTH					
				A	B	C	D					
4"	4.50-4.80		2	3-3/64	2-1/16	5-1/16	12	8	5/8	43	*FTSC-480-x	
				4-3/64	3-1/16	5-1/16	12	8	5/8	44		
				5-3/64	4-1/8	5-1/16	12	8	5/8	45		
6"	6.57-6.73 6.83-7.16 7.20-7.60 7.40-7.73		2	3-3/64	2-1/16	5-1/16	12	6	3/4	65	*FTSC-673-x FTSC-716-x FTSC-760-x FTSC-773-x	
				4-3/64	3-1/16	5-1/16	12	6	3/4	67		
				5-3/64	4-1/8	5-1/16	12	6	3/4	70		
				7-3/64	6-1/4	5-1/16	12	6	3/4	75		
8"	7.95-8.05 8.36-8.75 8.73-9.12 8.89-9.37 9.27-9.69		2	3-3/64	2-1/16	5-3/16	12	6	3/4	71	**FTSC-805-x *FTSC-875-x FTSC-912-x FTSC-937-x FTSC-969-x	
				4-3/64	3-1/16	5-3/16	12	6	3/4	73		
				5-3/64	4-1/8	5-3/16	12	6	3/4	76		
				7-3/64	6-1/4	5-3/16	12	6	3/4	86		
				9-3/64	8-1/4	5-3/16	16	8	3/4	93		
10"	9.95-10.10 10.45-10.88 11.03-11.47 11.36-11.80		2	3-3/64	2-1/16	5-3/16	12	6	3/4	79	**FTSC-1010-x FTSC-1088-x FTSC-1147-x FTSC-1180-x	
				4-3/64	3-1/16	5-3/16	12	6	3/4	81		
				5-3/64	4-1/8	5-3/16	12	6	3/4	84		
				7-3/64	6-1/4	5-3/16	12	6	3/4	93		
				9-3/64	8-1/4	5-3/16	16	8	3/4	130		
				11-3/64	10-1/4	5-3/16	20	10	3/4	139		
12"	11.76-12.20 12.42-12.88 13.13-13.60 13.60-14.09 14.10-14.58		2	3-3/64	2-1/16	5-3/16	12	6	3/4	87	**FTSC-1220-x FTSC-1288-x FTSC-1360-x FTSC-1409-x FTSC-1458-x	
				4-3/64	3-1/16	5-3/16	12	6	3/4	89		
				5-3/64	4-1/8	5-3/16	12	6	3/4	92		
				7-3/64	6-1/4	5-3/16	12	6	3/4	100		
				9-3/64	8-1/4	5-3/16	16	8	3/4	140		
				11-3/64	10-1/4	5-3/16	20	10	3/4	190		
				13-3/64	12-1/4	5-3/16	24	12	3/4	199		
14"-16"	14.59-15.08 14.81-15.30 15.23-15.72 15.73-16.22 16.30-16.73 16.74-17.26		2	3-3/64	2-1/16	5-3/16	12	6	3/4	94	**FTSC-1508-x FTSC-1530-x FTSC-1572-x FTSC-1622-x FTSC-1673-x FTSC-1726-x	
				4-3/64	3-1/16	5-3/16	12	6	3/4	96		
				5-3/64	4-1/8	5-3/16	12	6	3/4	99		
				7-3/64	6-1/4	5-3/16	12	6	3/4	110		
				9-3/64	8-1/4	5-3/16	16	8	3/4	152		
				11-3/64	10-1/4	5-3/16	20	10	3/4	203		
				13-3/64	12-1/4	5-3/16	24	12	3/4	228		
				15-5/16	13-1/2	6-1/4	28	14	3/4	253		

* Size on size taps for these units may require a 1/2" under size cutter.

** Size on size for this range not available.

*** **To order:** Add flange size code to the sleeve number. Example: A 4" flange on 6" cast iron pipe would be FTSC-716-4.

Note: A 1" undersize cutter is required for flanges 14" and larger. Oversize outlets are available by special request.

FEATURES

- Heavy welded steel meeting ASTM A36 36,000 psi minimum yield
- Bolts and nuts are made of type 304 stainless steel per ASTM A193 and A194
- Fusion-bonded epoxy-coating
- Certified to ANSI/NSF Standard 61
- Rated for 250 psi up to 24" outlets. Ratings not to exceed the rating of the pipe.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

04/14/22

Submitted By: