


# SUBMITTAL INFORMATION

## Steel Tapping Sleeve - (FTSC-xxxx-xx style)





### STEEL TAPPING SLEEVE (EPOXY COATED) - 48" AND 54"

Flange - ASTM A36 Carbon Steel - Flat face, recessed for standard tapping valve.

3/4-14 No-Lead Brass Test Plug

Bolts and Nuts - Type 304 stainless steel

Finish - Fusion-bonded epoxy coating

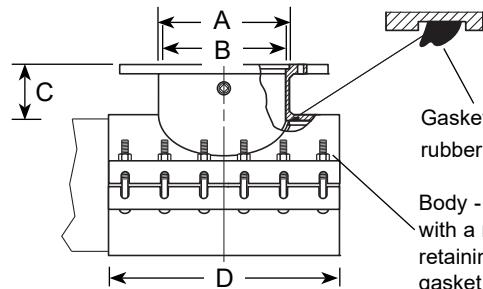

Gasket - NBR (Buna-N) rubber per ASTM D2000

Body - Heavy welded steel with a recessed groove or retaining ring to retain the gasket.

Nom. Pipe Size	Sleeve O.D. Range	By	Flange Size Code*	Nominal Dimensions - Inches				No. of Bolts	Sleeve Number*	✓ Submitted Item(s)
				A	B	C	D			
48"	47.45"-48.15"		4	5-1/32"	4-1/4"	5-3/16"	16	6	FTSC-4815-xx	
			6	7-1/32"	6-5/16"	5-3/16"	16	6		
			8	9-1/32"	8-1/4"	5-3/16"	16	8		
			10	11-1/32"	10-1/4"	5-3/16"	20	10		
			12	13-1/32"	12-1/4"	5-3/16"	24	12		
			14	15-9/32"	13-1/2"	6-1/4"	28	16		
			16	17-9/32"	15-1/2"	6-1/4"	32	16		
			18	19-1/2"	17-1/2"	6-1/4"	36	18		
			20	21-1/2"	19-1/2"	6-1/4"	40	20		
			24	25-1/2"	23-1/2"	6-1/4"	48	24		
			30	31-1/64"	30-3/16"	6-1/8"	60	30		
54"	57.20-57.90		4	5-1/32"	4-1/4"	5-3/16"	16	6	FTSC-5790-xx	
			6	7-1/32"	6-5/16"	5-3/16"	16	6		
			8	9-1/32"	8-1/4"	5-3/16"	16	8		
			10	11-1/32"	10-1/4"	5-3/16"	20	10		
			12	13-1/32"	12-1/4"	5-3/16"	24	12		
			14	15-9/32"	13-1/2"	6-1/4"	28	16		
			16	17-9/32"	15-1/2"	6-1/4"	32	16		
			18	19-1/2"	17-1/2"	6-1/4"	36	18		
			20	21-1/2"	19-1/2"	6-1/4"	40	20		
			24	25-1/2"	23-1/2"	6-1/4"	48	24		
			30	31-1/64"	30-3/16"	6-1/8"	60	30		

\*To Order: Add flange size code to the sleeve number. Example: A 12" flange on 54" cast iron pipe would be FTSC-5790-12. For alloy nuts and bolts option, add "-AH" to the catalog number. Example: FTSC-5790-12-AH.

Note: A 1" undersize cutter is required for flanges 14" and larger. Oversize outlets are available by special request.

### FEATURES

- Heavy welded steel meeting ASTM A36, 36,000 psi minimum yield.
- Nuts and bolts are type 304 stainless steel per ASTM A193 and A194
- Ring style gasket is NBR (Buna-N) per ASTM D2000
- Finish: Fusion-bonded epoxy coating
- Certified to NSF/ANSI 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
[www.fordmeterbox.com](http://www.fordmeterbox.com)

Submitted By: