


SUBMITTAL INFORMATION





STEEL TAPPING SLEEVE (EPOXY COATED) - 36" FOR HDPE PIPE

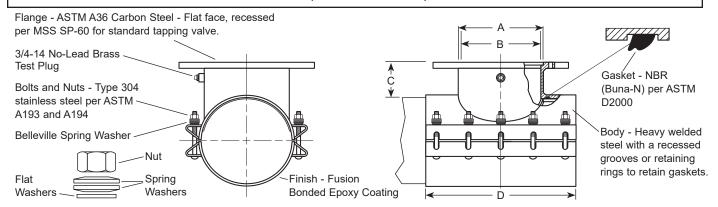

Nom. Pipe Size	SLEEVE O.D. RANGE (IN.)	Вү	FLANGE SIZE CODE*	Nominal Dimensions - Inches				Min.				
					OUTLET PIPE ID	TOP OF PIPE TO TOP OF FLANGE C	WIDTH	No. OF Bolts	Bolt Dia.	APPROX. Wt. LBS.	SLEEVE Number*	✓ SUBMITTED ITEM(S)
				Α								
36"	36.00		2	3-3/64	2-1/16	5-3/16	12	6	3/4	228	FTSCP-3600-x	
			3	4-3/64	3-1/16	5-3/16	12	6	3/4	230		
			4	5-3/64	4-1/8	5-3/16	12	6	3/4	231		
			6	7-3/64	6-1/4	5-3/16	12	6	3/4	254		
			8	9-3/64	8-1/4	5-3/16	16	8	3/4	301		
			10	11-3/64	10-1/4	5-3/16	20	10	3/4	348		
			12	13-3/64	12-1/4	5-3/16	24	12	3/4	438		
			14	15-5/16	13-1/2	6-1/4	28	14	3/4	541		
			16	17-5/16	15-1/2	6-1/4	32	16	3/4	606		
			18	19-17/32	17-1/2	6-1/4	36	18	3/4	671		
			20	21-17/32	19-1/2	6-1/4	40	20	3/4	802		
			24	25-17/32	23-1/2	6-1/4	48	32	3/4	992		
			30	31-1/16	29-9/16	6-1/4	60	36	3/4	1192		

^{*} To order: Add flange size to the sleeve number. Example: A 12" flange on 36" HDPE pipe would be FTSCP-3600-12.

FEATURES

- Heavy welded steel meeting ASTM A36 36,000 psi minimum yield
- Bolts, nuts and washers are type 304 stainless steel per ASTM A193 and A194. Heavy hex nuts are coated to prevent galling. Belleville spring tension washers under the nuts
- Ring style gasket is NBR (Buna-N) per ASTM D2000

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167 www.fordmeterbox.com

11/09/22

Submitted By	,
--------------	---