


SUBMITTAL INFORMATION

Steel Tapping Sleeve - (FTSCP-xxxx-x-EPDM-U100 style)



STEEL TAPPING SLEEVE (EPOXY COATED) - 18" TO 30" FOR HDPE PIPE

Flange - ASTM A36 Carbon Steel - Flat face, recessed per MSS SP-60 for standard tapping valve. Flange conforms to AWWA C207

3/4-14 No-Lead Brass
Test Plug


Bolts and Nuts - Type 304
stainless steel

Belleville Spring Washer

Nut

Flat Washers Spring Washers

Finish - Fusion
Bonded Epoxy Coating

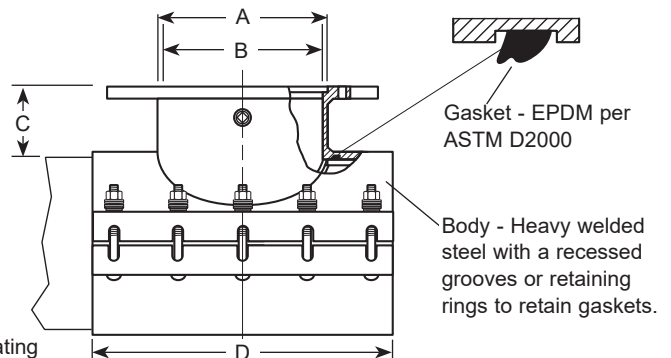

NOM. PIPE SIZE (IN.)	SLEEVE O.D. RANGE (IN.)	BY	FLANGED SIZE CODE*	NOMINAL DIMENSIONS - INCHES				No. OF BOLTS	SLEEVE NUMBER	✓ SUBMITTED ITEM(S)
				A	B	C	D			
18	18.00 19.50		3	4-3/64	3-1/16	5-3/16	12	6	FTSCP-1800-x-EPDM-U100 FTSCP-1950-x-EPDM-U100	
			4	5-3/64	4-1/8	5-3/16	12	6		
			6	7-3/64	6-1/4	5-3/16	12	6		
			8	9-3/64	8-1/4	5-3/16	16	8		
			10	11-3/64	10-1/4	5-3/16	20	10		
			12	13-3/64	12-1/4	5-3/16	24	12		
			14	15-5/16	13-1/2	6-1/4	28	14		
			16	17-5/16	15-1/2	6-1/4	32	16		
20	20.00 21.60		3	4-3/64	3-1/16	5-3/16	12	6	FTSCP-2000-x-EPDM-U100 FTSCP-2160-x-EPDM-U100	
			4	5-3/64	4-1/8	5-3/16	12	6		
			6	7-3/64	6-1/4	5-3/16	12	6		
			8	9-3/64	8-1/4	5-3/16	16	8		
			10	11-3/64	10-1/4	5-3/16	20	10		
			12	13-3/64	12-1/4	5-3/16	24	12		
			14	15-5/16	13-1/2	6-1/4	28	14		
			16	17-5/16	15-1/2	6-1/4	32	16		
24	24.00 25.80		18	19-17/32	17-1/2	6-1/4	36	18	FTSCP-2400-x-EPDM-U100 FTSCP-2580-x-EPDM-U100	
			3	4-3/64	3-1/16	5-3/16	12	6		
			4	5-3/64	4-1/8	5-3/16	12	6		
			6	7-3/64	6-1/4	5-3/16	12	6		
			8	9-3/64	8-1/4	5-3/16	16	8		
			10	11-3/64	10-1/4	5-3/16	20	10		
			12	13-3/64	12-1/4	5-3/16	24	12		
			14	15-5/16	13-1/2	6-1/4	28	14		
30	30.00 32.00		16	17-5/16	15-1/2	6-1/4	32	16	FTSCP-3000-x-EPDM-U100 FTSCP-3200-x-EPDM-U100	
			18	19-17/32	17-1/2	6-1/4	36	18		
			20	21-17/32	19-1/2	6-1/4	40	20		
			3	4-3/64	3-1/16	5-3/16	12	6		
			4	5-3/64	4-1/8	5-3/16	12	6		
			6	7-3/64	6-1/4	5-3/16	12	6		
			8	9-3/64	8-1/4	5-3/16	16	8		
			10	11-3/64	10-1/4	5-3/16	20	10		
			12	13-3/64	12-1/4	5-3/16	24	12		
			14	15-5/16	13-1/2	6-1/4	28	14		
			16	17-5/16	15-1/2	6-1/4	32	16		
			18	19-17/32	17-1/2	6-1/4	36	18		
			20	21-17/32	19-1/2	6-1/4	40	20		
			24	25-17/32	23-1/2	6-1/4	48	32		

* To order: Add flange size to the sleeve number. Example: A 12" flange on 18" HDPE pipe would be FTSCP-1800-12-EPDM-U100.

Note: A 1" undersize cutter is required for flanges 14" and larger. Oversize outlets are available by special request.

FEATURES

- Heavy welded steel meeting ASTM A36 36,000 psi minimum yield
- Bolts, nuts and washers are type 304 stainless steel per ASTM A193 and A194. Heavy hex nuts are coated to prevent galling. Belleville spring tension washers under the nuts
- Ring style gasket is EPDM per ASTM D2000
- Rated for 250 psi up to 24" outlets. Ratings not to exceed the rating of the pipe.
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

06/25/24

Submitted By: