

SUBMITTAL INFORMATION





TAPPING SLEEVE - EPOXY COATED WITH 304 STAINLESS STEEL HARDWARE 18"-30" FOR HDPE PIPE WITH MECHANICAL JOINT OUTLET

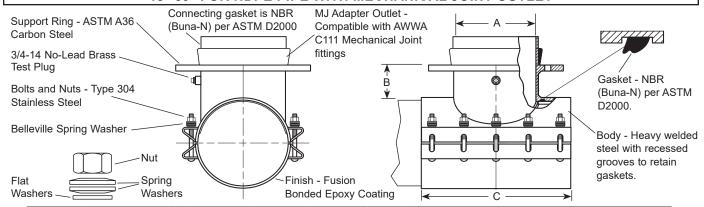

Nom. PIPE	SLEEVE	Ву	OUTLET	NOMINAL D	IMENSIONS -	INCHES	Min. No.	CATALOG NUMBER*	✓ SUBMITTED
SIZE	O.D. RANGE (IN.)	DY	SIZE CODE*	Α	В	С	OF BOLTS	CAIALOG NUMBER"	ITEM(S)
		\ /	3	3-1/4	5-3/16	16	6		
18"	18.00" 19.50"		4	4-1/4	5-3/16	16	6	FTSCP-1800-xx-MJ FTSCP-1950-xx-MJ	
			6	6-13/32	5-3/16	16	6		
			8	8-13/32	5-3/16	20	8		
			10	10-27/64	5-3/16	20	10		
			12	12-27/64	5-3/16	24	12		
			14	14	5-3/16	24	16		
			16	16	6-1/4	32	16		
20"	20.00" 21.60"		3	3-1/4	5-3/16	16	6	FTSCP-2000-xx-MJ FTSCP-2160-xx-MJ	
			4	4-1/4	5-3/16	16	6		
			6	6-13/32	5-3/16	16	6		
			8	8-13/32	5-3/16	20	8		
			10	10-27/64	5-3/16	20	10		
			12	12-27/64	5-3/16	24	12		
			14	14	5-3/16	24	16		
			16	16 18	6-1/4	32	16		
		(18		6-1/4	36	18		
24"	24.00" 25.80" 30.00" 32.00"		3	3-1/4 4-1/4	5-3/16 5-3/16	16 16	6	FTSCP-2400-xx-MJ FTSCP-2580-xx-MJ	
			6	6-13/32	5-3/16	16	6		
			8	8-13/32	5-3/16	20	8		
			10	10-27/64	5-3/16	20	10		
			12	12-27/64	5-3/16	24	12		
			14	14	5-3/16	24	16		
			16	16	6-1/4	32	16		
			18	18	6-1/4	36	18		
			20	20	6-1/4	40	20		
			3	3-1/4	5-3/16	16	6		
			4	4-1/4	5-3/16	16	6	FTSCP-3000-xx-MJ FTSCP-3200-xx-MJ	
			6	6-13/32	5-3/16	16	6		
			8	8-13/32	5-3/16	20	8		
			10	10-27/64	5-3/16	20	10		
			12	12-27/64	5-3/16	24	12		
		/\	14	14	5-3/16	24	16		
			16	16	6-1/4	32	16		
		$/\setminus$	18	18	6-1/4	36	18		
			20	20	6-1/4	40	20		

^{*} To order: Add outlet size code to the sleeve number. Example: A 12" outlet on 18" HDPE pipe would be FTSCP-1800-12-MJ. Note: A 1" undersize cutter is required for outlets 14" and larger. Oversize outlets are available by special request.

FEATURES

- Heavy welded steel meeting ASTM A36 36,000 psi minimum yield
- Bolts and nuts are made of type 304 stainless steel per ASTM A193 and A194. Belleville spring tension washers under the nuts
- Ring style gasket is NBR (Buna-N) per ASTM D200
- Rated for up to 250 psi. Rating not to exceed the pressure rating of the pipe.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com 08/08/22

Submitted By
