


SUBMITTAL INFORMATION

Steel Tapping Sleeve - (FTSP-xxx-xx style)



STEEL TAPPING SLEEVE - 6" TO 16" FOR HDPE PIPE, SDR 9 THROUGH SDR 17

Flange - ASTM A36 carbon steel with recess per MSS SP-60 to accept standard tapping valves. Flange conforms to AWWA C207 Class D ANSI 150# drilling

3/4-14 Steel Test Plug

Bolts and Nuts - High strength, low alloy


Belleville Spring Washer

Nut

Flat Washers

Spring Washers

Finish - Shop coat base for field coatings.

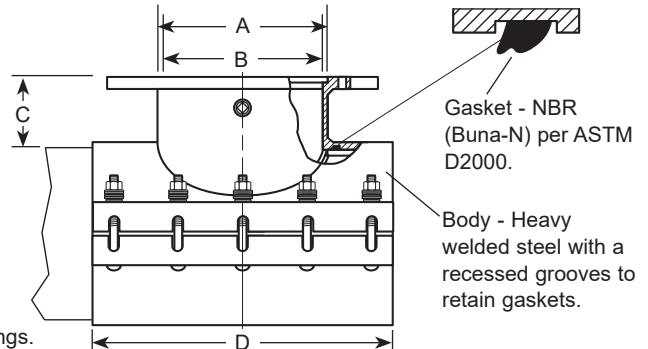

Gasket - NBR (Buna-N) per ASTM D2000.

Body - Heavy welded steel with a recessed grooves to retain gaskets.

NOM PIPE SIZE	SLEEVE OD RANGE (IN.)	FLANGE SIZE CODE	NOMINAL DIMENSIONS - INCHES				No. OF BOLTS	SIZE OF BOLTS (IN.)	APPROX WEIGHT LBS.	SLEEVE NUMBER	✓ SUBMITTED ITEM(S)
			COUNTER-BORE ID	OUTLET PIPE ID	TOP OF PIPE TO TOP OF FLANGE	WIDTH					
			A	B	C	D					
6"	6.63 6.90	2	3-3/64	2-1/16	5-1/16	12	6	3/4	65	FTSP-663-xx	
		3	4-3/64	3-1/16	5-1/16	12	6	3/4	67	FTSP-690-xx	
		4	5-3/64	4-1/8	5-1/16	12	6	3/4	70		
8"	8.63 9.05	2	3-3/64	2-1/16	5-3/16	12	6	3/4	71	FTSP-863-xx	
		3	4-3/64	3-1/16	5-3/16	12	6	3/4	73	FTSP-905-xx	
		4	5-3/64	4-1/8	5-3/16	12	6	3/4	76		
10"	10.75 11.10	6	7-3/64	6-1/4	5-3/16	12	6	3/4	86		
		2	3-3/64	2-1/16	5-3/16	12	6	3/4	79	FTSP-1075-xx	
		3	4-3/64	3-1/16	5-3/16	12	6	3/4	81	FTSP-1110-xx	
12"	12.75 13.20	4	5-3/64	4-1/8	5-3/16	12	6	3/4	84		
		6	7-3/64	6-1/4	5-3/16	12	6	3/4	93		
		8	9-3/64	8-1/4	5-3/16	16	8	3/4	130		
14"	14.00 15.30	2	3-3/64	2-1/16	5-3/16	12	6	3/4	87	FTSP-1275-xx	
		3	4-3/64	3-1/16	5-3/16	12	6	3/4	89	FTSP-1320-xx	
		4	5-3/64	4-1/8	5-3/16	12	6	3/4	92		
16"	16.00 17.40	6	7-3/64	6-1/4	5-3/16	12	6	3/4	100		
		8	9-3/64	8-1/4	5-3/16	16	8	3/4	140		
		10	11-3/64	10-1/4	5-3/16	20	10	3/4	190		
14"	14.00 15.30	2	3-3/64	2-1/16	5-3/16	12	6	3/4	94	FTSP-1400-xx	
		3	4-3/64	3-1/16	5-3/16	12	6	3/4	96	FTSP-1530-xx	
		4	5-3/64	4-1/8	5-3/16	12	6	3/4	99		
16"	16.00 17.40	6	7-3/64	6-1/4	5-3/16	12	6	3/4	110		
		8	9-3/64	8-1/4	5-3/16	16	8	3/4	152		
		10	11-3/64	10-1/4	5-3/16	20	10	3/4	203		
16"	16.00 17.40	12	13-3/64	12-1/4	5-3/16	24	12	3/4	228		
		2	3-3/64	2-1/16	5-3/16	12	6	3/4	108	FTSP-1600-xx	
		3	4-3/64	3-1/16	5-3/16	12	6	3/4	110	FTSP-1740-xx	
16"	16.00 17.40	4	5-3/64	4-1/8	5-3/16	12	6	3/4	110		
		6	7-3/64	6-1/4	5-3/16	12	6	3/4	118		
		8	9-3/64	8-1/4	5-3/16	16	8	3/4	170		
16"	16.00 17.40	10	11-3/64	10-1/4	5-3/16	20	10	3/4	210		
		12	13-3/64	12-1/4	5-3/16	24	12	3/4	265		
		14	15-5/16	13-1/2	6-1/4	28	14	3/4	325		

*** To order: Add Flange Size to the Sleeve Number. Example: A 4" flange on 6" HDPE pipe would be FTSP-663-4. For stainless steel nuts and bolts option, add "-SH" to the catalog number. Example: FTSP-663-4-SH.

Note: A 1" undersize cutter is required for flanges 14" and larger. Oversize outlets are available by special request.

FEATURES

- Heavy welded steel meeting ASTM A36 36,000 psi minimum yield
- Bolts and nuts are made of high strength, low alloy per ASTM A242 and AWWA C111, Belleville spring tension washers under the nuts
- Ring style gasket is NBR (Buna-N) per ASTM D2000
- Rated for 250 psi up to 24" outlets. 30"-36" outlets rated for 200 psi. Ratings not to exceed the rating of the pipe.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

03/07/23

Submitted By: