


SUBMITTAL INFORMATION

Steel Tapping Sleeve - (FTSP-xxxx-x style)



STEEL TAPPING SLEEVE - 18" TO 30" FOR HDPE PIPE


Flange - ASTM A36 Carbon Steel - Flat face, recessed per MSS SP-60 for standard tapping valve.

3/4-14 Steel Test Plug


Bolts and Nuts - High strength, low alloy

Belleville Spring Washer

Nut
Flat Washers
Spring Washers



Finish - Shop coat base for field coatings.

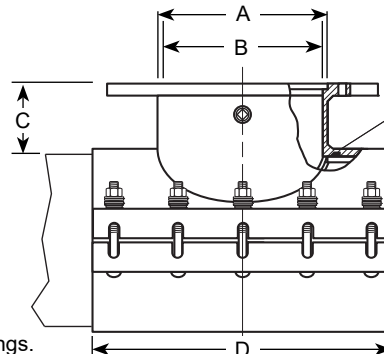

Gasket - NBR (Buna-N) per ASTM D2000

Body - Heavy welded steel with recessed grooves or retaining rings to retain gaskets.

NOM. PIPE SIZE	SLEEVE O.D. RANGE (IN.)	BY	FLANGED SIZE CODE*	NOMINAL DIMENSIONS - INCHES				No. OF BOLTS	SLEEVE NUMBER	✓ SUBMITTED ITEM(S)
				A	B	C	D			
18"	18.00 19.50		3	4-3/64	3-1/16	5-3/16	12	6	FTSP-1800-x FTSP-1950-x	
			4	5-3/64	4-1/8	5-3/16	12	6		
			6	7-3/64	6-1/4	5-3/16	12	6		
			8	9-3/64	8-1/4	5-3/16	16	8		
			10	11-3/64	10-1/4	5-3/16	20	10		
			12	13-3/64	12-1/4	5-3/16	24	12		
			14	15-5/16	13-1/2	6-1/4	28	14		
20"	20.00 21.60		16	17-5/16	15-1/2	6-1/4	32	16	FTSP-2000-x FTSP-2160-x	
			3	4-3/64	3-1/16	5-3/16	12	6		
			4	5-3/64	4-1/8	5-3/16	12	6		
			6	7-3/64	6-1/4	5-3/16	12	6		
			8	9-3/64	8-1/4	5-3/16	16	8		
			10	11-3/64	10-1/4	5-3/16	20	10		
			12	13-3/64	12-1/4	5-3/16	24	12		
24"	24.00 25.80		14	15-5/16	13-1/2	6-1/4	28	14	FTSP-2400-x FTSP-2580-x	
			16	17-5/16	15-1/2	6-1/4	32	16		
			18	19-17/32	17-1/2	6-1/4	36	18		
			3	4-3/64	3-1/16	5-3/16	12	6		
			4	5-3/64	4-1/8	5-3/16	12	6		
			6	7-3/64	6-1/4	5-3/16	12	6		
			8	9-3/64	8-1/4	5-3/16	16	8		
30"	30.00 32.00		10	11-3/64	10-1/4	5-3/16	20	10	FTSP-3000-x FTSP-3200-x	
			12	13-3/64	12-1/4	5-3/16	24	12		
			14	15-5/16	13-1/2	6-1/4	28	14		
			16	17-5/16	15-1/2	6-1/4	32	16		
			18	19-17/32	17-1/2	6-1/4	36	18		
			20	21-17/32	19-1/2	6-1/4	40	20		
			3	4-3/64	3-1/16	5-3/16	12	6		

* To order: Add flange size to the sleeve number. Example: A 12" flange on 18" HDPE pipe would be FTSP-1800-12. For stainless steel nuts and bolts option, add "-SH" to the catalog number. Example: FTSP-1800-12-SH.

FEATURES

- Heavy welded steel meeting ASTM A36 36,000 psi minimum yield
- Bolts, nuts and washers are made of high strength, low alloy per ASTM A242 and AWWA C111. Heavy hex nuts are coated to prevent galling. Belleville spring tension washers under the nuts
- Ring style gasket is NBR (Buna-N) per ASTM D2000

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

11/15/19

Submitted By: