

SUBMITTAL INFORMATION

Stainless Steel Tapping Sleeve - (FTSS-xxx-TAP-U100 style)




4"-12" TYPE 304 STAINLESS STEEL TAPPING SLEEVE WITH IP OR CC TAPPED OUTLET

Outlet Gasket - Gridded NBR (Buna-N) compounded for water service, per ASTM D2000. Outlet gasket ensures complete seal of outlet area.

Full Gasket - Gridded virgin SBR compounded for water service, per ASTM D2000. Full gasket gives 360° pipe coverage.

Armors - Heavy gauge type 304 stainless steel are vulcanized to gasket and recessed to bridge the gap between lugs.

3/16" lug (1/4" lug if using a 3/4" bolt)

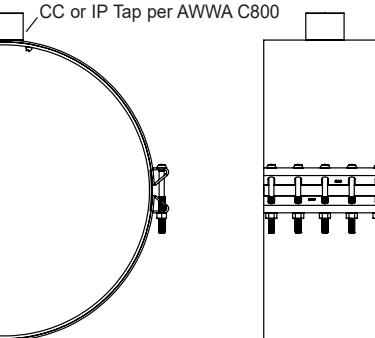

Bolts, Nuts, & Washers - Type 304 stainless steel per ASTM A193 and A194. Heavy hex nuts and washers are coated to prevent galling and maximize bolt efficiency.

NOM. PIPE SIZE	SLEEVE O.D. RANGE (IN.)	CATALOG NUMBER	BOLT DIA.	MIN. NO. BOLTS	✓SUBMITTED ITEM(S)
4"	4.50-4.80	FTSS-480-TAP-U100	5/8"	8	
	4.80-5.00	FTSS-500-TAP-U100			
	5.10-5.30	FTSS-530-TAP-U100			
	5.20-5.40	FTSS-540-TAP-U100			
6"	6.63-7.00	FTSS-700-TAP-U100	5/8"	8	
	6.90-7.10	FTSS-710-TAP-U100			
	7.10-7.30	FTSS-730-TAP-U100			
	7.30-7.50	FTSS-750-TAP-U100			
8"	8.63-9.05	FTSS-905-TAP-U100	5/8"	8	
	9.05-9.30	FTSS-930-TAP-U100			
	8.97-9.45	FTSS-945-TAP-U100			
	9.30-9.60	FTSS-960-TAP-U100			
	9.45-9.75	FTSS-975-TAP-U100			
10"	10.75-11.10	FTSS-1110-TAP-U100	5/8"	8	
	11.10-11.40	FTSS-1140-TAP-U100			
	11.06-11.45	FTSS-1145-TAP-U100			
	11.40-11.70	FTSS-1170-TAP-U100			
	11.85-12.15	FTSS-1215-TAP-U100			
12"	12.75-13.20	FTSS-1320-TAP-U100	5/8"	8	
	13.20-13.50	FTSS-1350-TAP-U100			
	13.12-13.52	FTSS-1352-TAP-U100			
	13.50-13.80	FTSS-1380-TAP-U100			
	14.10-14.40	FTSS-1440-TAP-U100			

* To order: Add outlet tap code to catalog number. Example: The complete FTSS catalog number for a 6" pipe (6.90 O.D.) with a 3/4" CC tap is FTSS-710-CC3-U100.

FEATURES

- Body, straps and UNC threaded bolts are made of 304 stainless steel.
- All welds are fully passivated for corrosion resistance.
- Outlet gasket is NBR (Buna-N) rubber per ASTM D2000
- Rated for the lesser of pressure rating of the pipe or 250 psi
- Rated for 150°F
- Certified to NSF/ANSI 61
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

Submitted By: