



SUBMITTAL INFORMATION

Stainless Steel Tapping Sleeve 4"-12" - (FTSS-xxx-x-EPDM style)



TAPPING SLEEVE WITH STAINLESS STEEL OR CARBON STEEL FLANGE AND EPDM GASKET

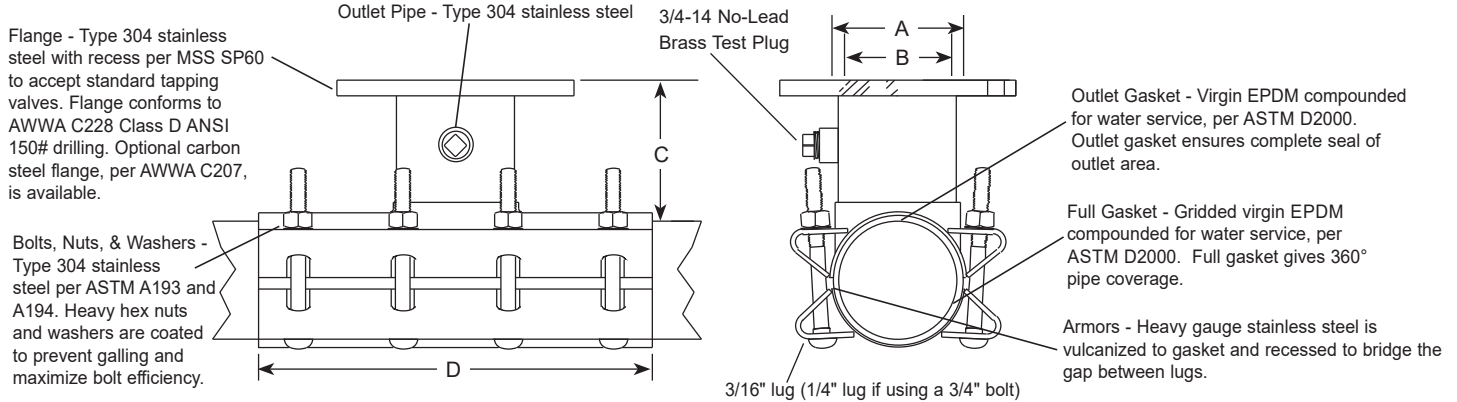

NOM. PIPE SIZE	SLEEVE O.D. RANGE (IN.)	CATALOG NUMBER	FLANGED OUTLET SIZE	NOMINAL DIMENSIONS - INCHES				MIN. NO. BOLTS	BOLT DIA.	APPROX. WT. (LBS.)	✓ SUBMITTED ITEM(S)
				COUNTER-BORE ID	OUTLET PIPE ID	TOP OF PIPE TO TOP OF FLANGE	WIDTH				
				A	B	C	D				
4"	4.50-4.80	FTSS-480-x-EPDM	2	3-1/16	3-1/4	5-3/8	15	8	5/8"	36	
	4.80-5.00	FTSS-500-x-EPDM	3	4-1/16	3-1/4	4-15/16	15	8	5/8"	37	
	5.10-5.30	FTSS-530-x-EPDM	4	5-1/16	4-1/4	4-15/16	15	8	5/8"	38	
	5.20-5.40	FTSS-540-x-EPDM	4	5-1/16	4-1/4	4-15/16	15	8	5/8"	38	
6"	6.60-7.00	FTSS-700-x-EPDM	2	3-1/16	3-1/4	5-3/8	15	8	5/8"	40	
	6.90-7.30	FTSS-730-x-EPDM	3	4-1/16	3-1/4	4-15/16	15	8	5/8"	41	
	7.30-7.50	FTSS-750-x-EPDM	4	5-1/16	4-1/4	4-15/16	15	8	5/8"	42	
			6	7-1/16	6-13/32	5-1/4	15	8	5/8"	47	
8"	8.63-9.05	FTSS-905-x-EPDM	2	3-1/16	3-1/4	5-3/8	15	8	5/8"	40	
	8.97-9.45	FTSS-945-x-EPDM	3	4-1/16	3-1/4	4-15/16	15	8	5/8"	41	
	9.30-9.60	FTSS-960-x-EPDM	4	5-1/16	4-1/4	4-15/16	15	8	5/8"	42	
	9.45-9.75	FTSS-975-x-EPDM	6	7-1/16	6-13/32	5-1/4	15	8	5/8"	49	
10"	10.75-11.10	FTSS-1110-x-EPDM	8	9-1/16	8-13/32	5-3/8	20	12	5/8"	75	
	11.06-11.45	FTSS-1145-x-EPDM	2	3-1/16	3-1/4	5-3/8	15	8	5/8"	45	
	11.40-11.70	FTSS-1170-x-EPDM	3	4-1/16	3-1/4	4-15/16	15	8	5/8"	46	
	11.85-12.15	FTSS-1215-x-EPDM	4	5-1/16	4-1/4	4-15/16	15	8	5/8"	47	
12"	12.75-13.20	FTSS-1320-x-EPDM	6	7-1/16	6-13/32	5-1/4	15	8	5/8"	53	
	13.12-13.52	FTSS-1352-x-EPDM	8	9-1/16	8-13/32	5-3/8	20	12	5/8"	79	
	13.50-13.80	FTSS-1380-x-EPDM	10	11-1/16	10-15/32	5-7/8	20	12	3/4"	99	
	14.10-14.40	FTSS-1440-x-EPDM	2	3-1/16	3-1/4	5-3/8	15	8	5/8"	48	
			3	4-1/16	3-1/4	4-15/16	15	8	5/8"	49	
			4	5-1/16	4-1/4	4-15/16	15	8	5/8"	50	
			6	7-1/16	6-13/32	5-1/4	15	8	5/8"	55	
			8	9-1/16	8-13/32	5-3/8	20	12	5/8"	86	
			10	11-1/16	10-15/32	5-7/8	20	12	3/4"	104	
			12	13-1/16	12-13/32	6	24	14	3/4"	138	

Highlighted ranges are recommended for ductile iron pipe and C900/C905 PVC pipe applications.

* To order: Add flanged outlet size to catalog number. Example: The complete FTSS catalog number for a 6" pipe (6.90 O.D.) with a 4" stainless steel flange is FTSS-730-4-EPDM. For a carbon steel flange, add "A" to the catalog number. Example: FTSS-730-4A-EPDM

FEATURES

- Body, straps and UNC threaded bolts are made of type 304 stainless steel. Flange can be either stainless steel or ASTM A36 carbon steel. All welds are fully passivated for corrosion resistance.
- Stainless steel plug available, add "-SP" to part number
- Meets AWWA C223
- Tapping sleeves rated for 250 psi working pressure on 4"-12"
- Certified to ANSI/NSF Standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

11/10/22

Submitted By: