

SUBMITTAL INFORMATION





TAPPING SLEEVE WITH STAINLESS STEEL OR CARBON STEEL FLANGE

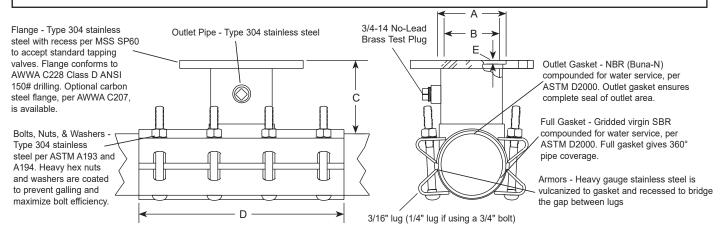

	SLEEVE O.D. RANGE (In.)	CATALOG NUMBER	FLANGED OUTLET SIZE	Nominal Dimensions - Inches							
Nom. Pipe Size				COUNTER- OUTLET BORE ID PIPE ID	TOP OF PIPE TO TOP OF WIDTH FLANGE	Min. No. Bolts	BOLT DIA.	APPROX. Wt. (LBs.)	✓ SUBMITTED ITEM(S)		
				Α	ВС	D					
8"	9.38-9.95	FTSS-995-x	2	3-1/16	3-1/4	5-3/8	15	8	5/8"	40	
			3	4-1/16	3-1/4	4-15/16	15	8	5/8"	41	
			4	5-1/16	4-1/4	4-15/16	15	8	5/8"	42	
			6	7-1/16	6-13/32	5-1/4	15	8	5/8"	49	
			8	9-1/16	8-13/32	5-3/8	20	12	5/8"	75	
10"	11.26-11.42	FTSS-1142-x	2	3-1/16	3-1/4	5-3/8	15	8	5/8"	45	
			3	4-1/16	3-1/4	4-15/16	15	8	5/8"	46	
			4	5-1/16	4-1/4	4-15/16	15	8	5/8"	47	
			6	7-1/16	6-13/32	5-1/4	15	8	5/8"	53	
			8	9-1/16	8-13/32	5-3/8	20	12	5/8"	79	
			10	11-1/16	10-15/32	5-7/8	20	12	3/4"	99	

^{*} To order: Add flanged outlet size to catalog number. Example: The complete FTSS catalog number for a 8" pipe with a 4" stainless steel flange is FTSS-995-4. For a carbon steel flange, add "A" to the catalog number. Example: FTSS-995-4A

FEATURES

- Body, straps and UNC threaded bolts are made of type 304 stainless steel. Flange can be either stainless steel or ASTM A36 carbon steel. All welds are fully passivated for corrosion resistance.
- · Stainless steel plug available, add "-SP" to part number
- Meets AWWA C223
- · Rated for 250 psi working pressure
- Certified to ANSI/NSF Standard 61
- Rated to 250 psi. Rating not to exceed the pressure rating of the pipe

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167 www.fordmeterbox.com

12/13/22

C.	ıhn	nitte	.A E	D
	ınn			