


# SUBMITTAL INFORMATION

## Stainless Steel Tapping Sleeve - (FTSS-xxxx-TAP-L8-Q style)



### 14"-24" TYPE 316 STAINLESS STEEL TAPPING SLEEVE WITH IP OR CC TAPPED OUTLET



Outlet Gasket - Gridded NBR (Buna-N) compounded for water service, per ASTM D2000. Outlet gasket ensures complete seal of outlet area.

Full Gasket - Gridded virgin SBR compounded for water service, per ASTM D2000. Full gasket gives 360° pipe coverage.

Armors - Heavy gauge 316 stainless steel are vulcanized to gasket and recessed to bridge the gap between lugs.

3/16" lug (1/4" lug if using a 3/4" bolt)

CC or IP Tap per AWWA C800

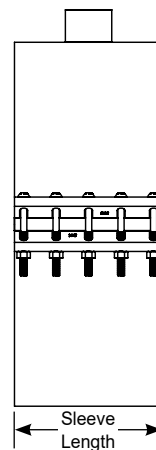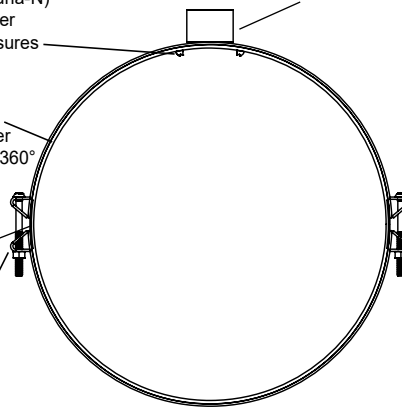

Bolts, Nuts, & Washers - Type 316 stainless steel per ASTM A193 and A194. Heavy hex nuts and washers are coated to prevent galling and maximize bolt efficiency.

| NOM. PIPE SIZE | SLEEVE O.D. RANGE (IN.) | CATALOG NUMBER     | SLEEVE LENGTH (IN.) | SADDLE THICKNESS (GAUGE) | STRAP THICKNESS (GAUGE) | BOLT SIZE   | ✓ SUBMITTED ITEM(S) |
|----------------|-------------------------|--------------------|---------------------|--------------------------|-------------------------|-------------|---------------------|
| 14"            | 15.22-15.70             | FTSS-1570-TAP-L8-Q | 8                   | .105" (12)               | .075" (14)              | 3/4"x8-1/2" |                     |
|                | 15.80-16.20             | FTSS-1620-TAP-L8-Q |                     |                          |                         |             |                     |
|                | 16.48-16.88             | FTSS-1688-TAP-L8-Q |                     |                          |                         |             |                     |
| 16"            | 17.20-17.60             | FTSS-1760-TAP-L8-Q | 8                   | .105" (12)               | .075" (14)              | 3/4"x8-1/2" |                     |
|                | 17.32-17.80             | FTSS-1780-TAP-L8-Q |                     |                          |                         |             |                     |
|                | 17.75-18.15             | FTSS-1815-TAP-L8-Q |                     |                          |                         |             |                     |
|                | 18.15-18.62             | FTSS-1862-TAP-L8-Q |                     |                          |                         |             |                     |
|                | 18.60-19.00             | FTSS-1900-TAP-L8-Q |                     |                          |                         |             |                     |
|                | 18.80-19.20             | FTSS-1920-TAP-L8-Q |                     |                          |                         |             |                     |
| 18"            | 19.42-19.92             | FTSS-1992-TAP-L8-Q | 8                   | .105" (12)               | .075" (14)              | 3/4"x8-1/2" |                     |
|                | 19.80-20.20             | FTSS-2020-TAP-L8-Q |                     |                          |                         |             |                     |
| 20"            | 20.20-20.60             | FTSS-2060-TAP-L8-Q | 8                   | .105" (12)               | .075" (14)              | 3/4"x8-1/2" |                     |
|                | 20.90-21.30             | FTSS-2130-TAP-L8-Q |                     |                          |                         |             |                     |
|                | 21.20-21.60             | FTSS-2160-TAP-L8-Q |                     |                          |                         |             |                     |
|                | 21.40-21.80             | FTSS-2180-TAP-L8-Q |                     |                          |                         |             |                     |
|                | 21.86-22.26             | FTSS-2226-TAP-L8-Q |                     |                          |                         |             |                     |
|                | 22.30-22.70             | FTSS-2270-TAP-L8-Q |                     |                          |                         |             |                     |
|                | 23.40-23.80             | FTSS-2380-TAP-L8-Q |                     |                          |                         |             |                     |
|                |                         |                    |                     |                          |                         |             |                     |
| 24"            | 23.80-24.20             | FTSS-2420-TAP-L8-Q | 8                   | .105" (12)               | .075" (14)              | 3/4"x8-1/2" |                     |
|                | 25.60-26.00             | FTSS-2600-TAP-L8-Q |                     |                          |                         |             |                     |
|                | 26.20-26.60             | FTSS-2660-TAP-L8-Q |                     |                          |                         |             |                     |

#### OUTLET TAP CODE

| CC (AWWA) THREAD |             |                     |
|------------------|-------------|---------------------|
| THREAD           | CODE NUMBER | ✓ SUBMITTED ITEM(S) |
| 1/2" CC          | CC1         |                     |
| 3/4" CC          | CC3         |                     |
| 1" CC            | CC4         |                     |
| 1-1/4" CC        | ***CC5      |                     |
| 1-1/2" CC        | CC6         |                     |
| 2" CC            | CC7         |                     |

#### IP THREAD

| THREAD    | CODE NUMBER | ✓ SUBMITTED ITEM(S) |
|-----------|-------------|---------------------|
| 3/4" IP   | IP3         |                     |
| 1" IP     | IP4         |                     |
| 1-1/4" IP | ***IP5      |                     |
| 1-1/2" IP | IP6         |                     |
| 2" IP     | IP7         |                     |

\*\*\* Contact factory for availability

\* Example: The complete FTSS catalog number for a 16" pipe (17.32 O.D.) with a 3/4" CC tap is FTSS-1780-CC3-L8-Q.

**Note:** Highlighted ranges are recommended for ductile iron pipe, pit cast and C900 pipe applications.

#### FEATURES

- Body, straps and hardware are made of type 316 stainless steel.
- All welds are fully passivated for corrosion resistance
- Certified to ANSI/NSF Standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

01/13/21

Submitted By: