


SUBMITTAL INFORMATION

Stainless Steel Tapping Sleeve - (FTSS-xxxx-TAP style)




14"-24" STAINLESS STEEL TAPPING SLEEVE WITH IP OR CC TAPPED OUTLET

Outlet Gasket - Gridded NBR (Buna-N) compounded for water service, per ASTM D2000. Outlet gasket ensures complete seal of outlet area.


Full Gasket - Gridded virgin SBR compounded for water service, per ASTM D2000. Full gasket gives 360° pipe coverage.

Armors - Heavy gauge type 304 stainless steel are vulcanized to gasket and recessed to bridge the gap between lugs.

1/4" lug

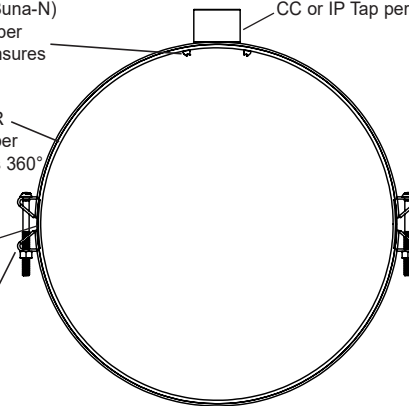

CC or IP Tap per AWWA C800

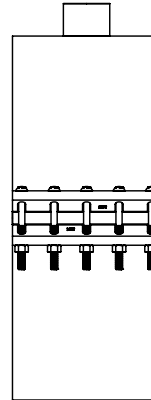

Bolts, Nuts, & Washers - Type 304 stainless steel per ASTM A193 and A194. Heavy hex nuts and washers are coated to prevent galling and maximize bolt efficiency.

NOM. PIPE SIZE	SLEEVE O.D. RANGE (IN.)	CATALOG NUMBER	BOLT DIA.	MIN. NO. BOLTS	✓ SUBMITTED ITEM(S)
14"	15.22-15.70	FTSS-1570-TAP	3/4"	10	
	15.80-16.20	FTSS-1620-TAP			
	16.48-16.88	FTSS-1688-TAP			
16"	17.20-17.60	FTSS-1760-TAP	3/4"	10	
	17.32-17.80	FTSS-1780-TAP			
	17.75-18.15	FTSS-1815-TAP			
	18.15-18.62	FTSS-1862-TAP			
	18.60-19.00	FTSS-1900-TAP			
	18.80-19.20	FTSS-1920-TAP			
18"	19.42-19.92	FTSS-1992-TAP	3/4"	10	
	19.80-20.20	FTSS-2020-TAP			
20"	20.20-20.60	FTSS-2060-TAP	3/4"	10	
	20.90-21.30	FTSS-2130-TAP			
	21.20-21.60	FTSS-2160-TAP			
	21.40-21.80	FTSS-2180-TAP			
	21.86-22.26	FTSS-2226-TAP			
	22.30-22.70	FTSS-2270-TAP			
	23.40-23.80	FTSS-2380-TAP			
24"	23.80-24.20	FTSS-2420-TAP	3/4"	10	
	25.60-26.00	FTSS-2600-TAP			
	26.20-26.60	FTSS-2660-TAP			

OUTLET TAP CODE

CC (AWWA) THREAD		
THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)
1/2" CC	CC1	
3/4" CC	CC3	
1" CC	CC4	
1-1/4" CC	***CC5	
1-1/2" CC	CC6	
2" CC	CC7	

IP THREAD		
THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)
3/4" IP	IP3	
1" IP	IP4	
1-1/4" IP	***IP5	
1-1/2" IP	IP6	
2" IP	IP7	
3" IP	IP9	
4" IP	IP11	

*** Contact factory for availability

* Example: The complete FTSS catalog number for a 16" pipe (17.32 O.D.) with a 3/4" CC tap is FTSS-1780-CC3.

Note: Highlighted ranges are recommended for ductile iron pipe, pit cast and C900/C905 pipe applications.

FEATURES

- Body, straps and hardware are made of type 304 stainless steel
- All welds are fully passivated for corrosion resistance
- Outlet gasket is NBR (Buna-N) per ASTM D2000.
- Other sizes and ranges available. Contact your Ford Meter Box® representative for details.
- Removable bolts
- Certified to NSF/ANSI 61
- 14"-16" rated to 200 psi. 18"-20" rated to 175 psi. 24" rated to 150 psi. Rating not to exceed the pressure rating of the pipe.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

10/19/22

Submitted By: