



SUBMITTAL INFORMATION

Stainless Steel Tapping Sleeve - (FTSS-xxxx-x-N style)



TAPPING SLEEVE WITH STAINLESS STEEL OR CARBON STEEL FLANGE

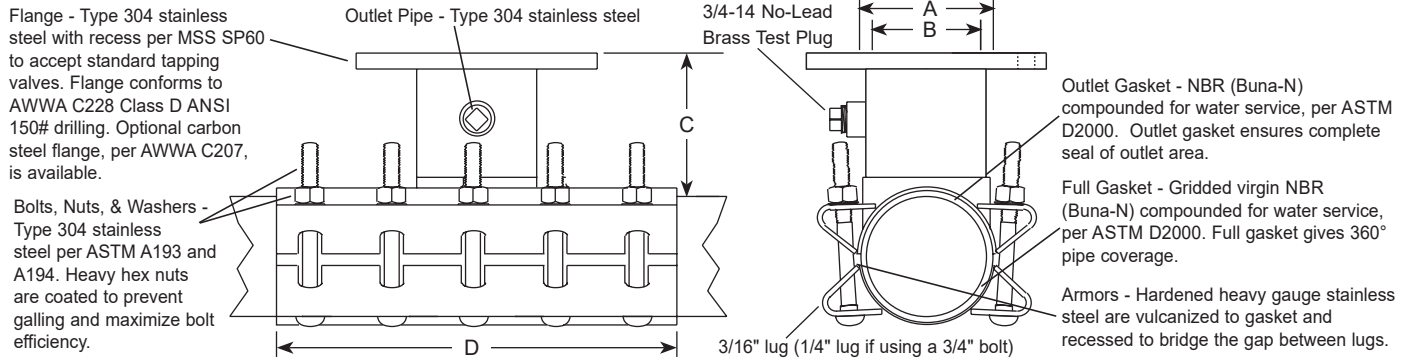

NOM. PIPE SIZE	SLEEVE O.D. RANGE (IN.)	CATALOG NUMBER	FLANGED OUTLET SIZE	NOMINAL DIMENSIONS - INCHES				MIN. NO. BOLTS	BOLT DIA.	APPROX. WT. (LBS.)	✓ SUBMITTED ITEM(S)
				COUNTER-BORE ID	OUTLET PIPE ID	TOP OF PIPE TO TOP OF FLANGE	WIDTH				
				A	B	C	D				
20"	20.20-20.60	FTSS-2060-x-N	2	3-1/16	3-1/4	5-3/8	16	10	3/4"	84	
			3	4-1/16	3-1/4	4-15/16	16	10	3/4"	85	
			4	5-1/16	4-1/4	4-15/16	16	10	3/4"	86	
			6	7-1/16	6-13/32	5-1/4	16	10	3/4"	92	
			8	9-1/16	8-13/32	5-3/8	20	14	3/4"	114	
	21.20-21.60	FTSS-2160-x-N	10	11-1/16	10-15/32	5-7/8	20	14	3/4"	123	
			12	13-1/16	12-13/32	6	24	16	3/4"	162	
			14	15-9/32	13-1/2	6-1/8	24	16	3/4"	195	
			16	17-9/32	15-1/2	6-1/8	32	20	3/4"	205	
	21.86-22.26	FTSS-2226-x-N	18	19-1/2	17-1/2	6-1/8	36	24	3/4"	215	
24"			20	21-1/2	19-1/2	6-1/8	40	24	3/4"	222	
	23.80-24.20	FTSS-2420-x-N	2	3-1/16	3-1/4	5-3/8	16	10	3/4"	95	
			3	4-1/16	3-1/4	4-15/16	16	10	3/4"	96	
			4	5-1/16	4-1/4	4-15/16	16	10	3/4"	97	
			6	7-1/16	6-13/32	5-1/4	16	10	3/4"	103	
	25.60-26.00	FTSS-2600-x-N	8	9-1/16	8-13/32	5-3/8	20	14	3/4"	127	
			10	11-1/16	10-15/32	5-7/8	20	14	3/4"	136	
			12	13-1/16	12-13/32	6	24	16	3/4"	178	
			14	15-9/32	13-1/2	6-1/8	24	16	3/4"	199	
	26.20-26.60	FTSS-2660-x-N	16	17-9/32	15-1/2	6-1/8	32	20	3/4"	210	
			18	19-1/2	17-1/2	6-1/8	36	24	3/4"	224	
			20	21-1/2	19-1/2	6-1/8	40	24	3/4"	230	
			24	25-1/2	23-1/2	6-1/8	48	28	3/4"	256	

* For carbon steel flange, add "A" to the catalog number. Example: The complete FTSS catalog number for a 20" pipe (21.20 O.D.) with a 12" stainless steel flange is FTSS-2160-12-N. For a carbon steel flange the number is FTSS-1860-12A-N. Add "-SP" for optional stainless steel test plug.

Note: A 1" undersize cutter is required for flanges 14" and larger. Oversize outlets are available by special request.

FEATURES

- Certified to ANSI/NSF Standard 61
- Complies with AWWA C223 and MSS SP-124
- All sleeves fully passivated for corrosion resistance
- Rated for 200 psi nominal sizes 14"-16", 175 psi nominal sizes 18"-20", and 150 psi in nominal size 24". Rating not to exceed the pressure rating of the pipe.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

11/23/22

Submitted By: