


SUBMITTAL INFORMATION

Stainless Steel Tapping Sleeve 14"-18" - (FTSS-xxxx-x style)





TAPPING SLEEVE WITH STAINLESS STEEL OR CARBON STEEL FLANGE

Flange - Type 304 stainless steel with recess per MSS SP-60 to accept standard tapping valves. Flange conforms to AWWA C228 Class D ANSI 150# drilling. Optional carbon steel flange, per AWWA C207, is available.

Bolts, Nuts, & Washers - Type 304 stainless steel per ASTM A193 and A194. Heavy hex nuts are coated to prevent galling and maximize bolt efficiency.

Outlet Pipe - Type 304 stainless steel.

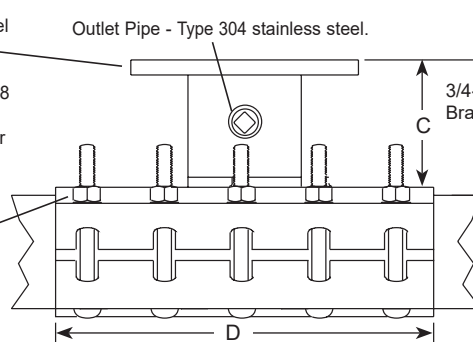

Outlet Gasket - NBR (Buna-N) compounded for water service, per ASTM D2000. Outlet gasket ensures complete seal of outlet area.

Full Gasket - Gridded virgin SBR compounded for water service, per ASTM D2000. Full gasket gives 360° pipe coverage.

Armors - Hardened heavy gauge stainless steel are vulcanized to gasket and recessed to bridge the gap between lugs.

NOM. PIPE SIZE (IN.)	SLEEVE O.D. RANGE (IN.)	CATALOG NUMBER	FLANGED OUTLET SIZE (IN.)	NOMINAL DIMENSIONS - INCHES				MIN. NO. BOLTS	BOLT DIA.	APPROX. WT. (LBS.)	✓ SUBMITTED ITEM(S)
				COUNTER-BORE ID	OUTLET PIPE ID	TOP OF PIPE TO TOP OF FLANGE	WIDTH				
				A	B	C	D				
14	15.22-15.70	FTSS-1570-x	2	3-1/16	3-1/4	5-3/8	16	10	3/4"	73	
			3	4-1/16	3-1/4	4-15/16	16	10	3/4"	74	
			4	5-1/16	4-1/4	4-15/16	16	10	3/4"	75	
	15.80-16.20	FTSS-1620-x	6	7-1/16	6-13/32	5-1/4	16	10	3/4"	82	
			8	9-1/16	8-13/32	5-3/8	20	14	3/4"	102	
			10	11-1/16	10-15/32	5-7/8	20	14	3/4"	110	
			12	13-1/16	12-13/32	6	24	16	3/4"	146	
16	16.48-16.88	FTSS-1688-x	14	15-9/32	13-1/2	6-1/8	24	16	3/4"	160	
			2	3-1/16	3-1/4	5-3/8	16	10	3/4"	76	
			3	4-1/16	3-1/4	4-15/16	16	10	3/4"	77	
			4	5-1/16	4-1/4	4-15/16	16	10	3/4"	78	
			6	7-1/16	6-13/32	5-1/4	16	10	3/4"	84	
			8	9-1/16	8-13/32	5-3/8	20	14	3/4"	104	
			10	11-1/16	10-15/32	5-7/8	20	14	3/4"	114	
			12	13-1/16	12-13/32	6	24	16	3/4"	150	
			14	15-9/32	13-1/2	6-1/8	24	16	3/4"	188	
			16	17-9/32	15-1/2	6-1/8	32	20	3/4"	195	
			2	3-1/16	3-1/4	5-3/8	16	10	3/4"	82	
			3	4-1/16	3-1/4	4-15/16	16	10	3/4"	83	
			4	5-1/16	4-1/4	4-15/16	16	10	3/4"	84	
			6	7-1/16	6-13/32	5-1/4	16	10	3/4"	90	
18	17.20-17.60 17.32-17.80 17.47-17.87 17.75-18.15 18.15-18.60 18.80-19.20	FTSS-1760-x FTSS-1780-x FTSS-1787-x FTSS-1815-x FTSS-1860-x FTSS-1920-x	8	9-1/16	8-13/32	5-3/8	20	14	3/4"	112	
			10	11-1/16	10-15/32	5-7/8	20	14	3/4"	120	
			12	13-1/16	12-13/32	6	24	16	3/4"	160	
			14	15-9/32	13-1/2	6-1/8	24	16	3/4"	190	
			16	17-9/32	15-1/2	6-1/8	32	20	3/4"	200	
			18	19-1/2	17-1/2	6-1/8	36	24	3/4"	210	
			2	3-1/16	3-1/4	5-3/8	16	10	3/4"	82	
			3	4-1/16	3-1/4	4-15/16	16	10	3/4"	83	

* For carbon steel flange, add "A" to the catalog number. Example: The complete FTSS catalog number for a 16" pipe (18.15 O.D.) with a 12" stainless steel flange is FTSS-1860-12. For a carbon steel flange the number is FTSS-1860-12A. Add "-SP" for optional stainless steel test plug.

Note: A 1" undersize cutter is required for flanges 14" and larger. Oversize outlets are available by special request.

FEATURES

- Certified to ANSI/NSF Standard 61
- Complies with AWWA C223 and MSS SP-60
- All sleeves fully passivated for corrosion resistance
- Rated for 200 psi sizes 14"-16" and 175 psi in 18". Rating not to exceed the pressure rating of the pipe.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

06/12/23

Submitted By: