



SUBMITTAL INFORMATION

Stainless Steel Tapping Sleeve - (FTSS-xxxx-xx-EPDM style)



TAPPING SLEEVE WITH STAINLESS STEEL OR CARBON STEEL FLANGE AND EPDM GASKET

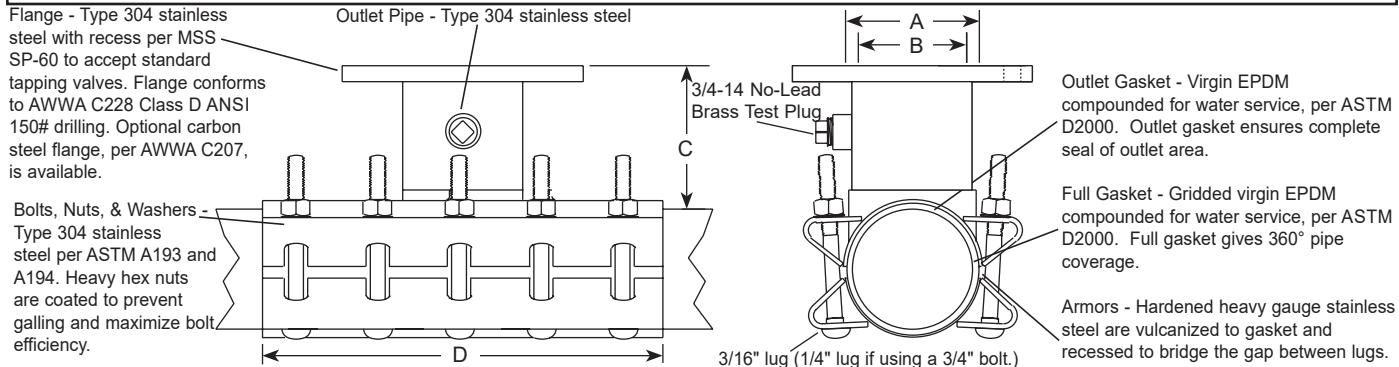

NOM. PIPE SIZE	SLEEVE O.D. RANGE (IN.)	CATALOG NUMBER	FLANGED OUTLET SIZE	NOMINAL DIMENSIONS - INCHES				MIN. NO. BOLTS	BOLT DIA.	APPROX. WT. (LBS.)	✓ SUBMITTED ITEM(S)
				COUNTER-BORE ID	OUTLET PIPE ID	TOP OF PIPE TO TOP OF FLANGE	WIDTH				
14"	15.22-15.70	FTSS-1570-xx-EPDM	2	3-1/16	3-1/4	5-3/8	16	10	3/4"	73	
			3	4-1/16	3-1/4	4-15/16	16	10	3/4"	74	
			4	5-1/16	4-1/4	4-15/16	16	10	3/4"	75	
	15.80-16.20	FTSS-1620-xx-EPDM	6	7-1/16	6-13/32	5-1/4	16	10	3/4"	82	
			8	9-1/16	8-13/32	5-3/8	20	14	3/4"	102	
	16.48-16.88	FTSS-1688-xx-EPDM	10	11-1/16	10-15/32	5-7/8	20	14	3/4"	110	
			12	13-1/16	12-13/32	6	24	16	3/4"	146	
			14	15-9/32	13-1/2	6-1/8	24	16	3/4"	160	
			2	3-1/16	3-1/4	5-3/8	16	10	3/4"	76	
			3	4-1/16	3-1/4	4-15/16	16	10	3/4"	77	
16"	17.20-17.60	FTSS-1760-xx-EPDM	4	5-1/16	4-1/4	4-15/16	16	10	3/4"	78	
			6	7-1/16	6-13/32	5-1/4	16	10	3/4"	84	
	17.32-17.80	FTSS-1780-xx-EPDM	8	9-1/16	8-13/32	5-3/8	20	14	3/4"	104	
			10	11-1/16	10-15/32	5-7/8	20	14	3/4"	114	
	17.75-18.15	FTSS-1815-xx-EPDM	12	13-1/16	12-13/32	6	24	16	3/4"	150	
			14	15-9/32	13-1/2	6-1/8	24	16	3/4"	188	
	18.15-18.62	FTSS-1862-xx-EPDM	16	17-9/32	15-1/2	6-1/8	32	20	3/4"	195	
			2	3-1/16	3-1/4	5-3/8	16	10	3/4"	82	
18"	19.42-19.92	FTSS-1992-xx-EPDM	3	4-1/16	3-1/4	4-15/16	16	10	3/4"	83	
			4	5-1/16	4-1/4	4-15/16	16	10	3/4"	84	
	19.80-20.20	FTSS-2020-xx-EPDM	6	7-1/16	6-13/32	5-1/4	16	10	3/4"	90	
			8	9-1/16	8-13/32	5-3/8	20	14	3/4"	112	
			10	11-1/16	10-15/32	5-7/8	20	14	3/4"	120	
			12	13-1/16	12-13/32	6	24	16	3/4"	160	
			14	15-9/32	13-1/2	6-1/8	24	16	3/4"	190	
			16	17-9/32	15-1/2	6-1/8	32	20	3/4"	200	
			18	19-1/2	17-1/2	6-1/8	36	24	3/4"	210	

* For carbon steel flange, add "A" to the catalog number. Example: The complete FTSS catalog number for a 16" pipe (18.15 O.D.) with a 12" stainless steel flange is FTSS-1862-12-EPDM. For a carbon steel flange the number is FTSS-1862-12A-EPDM. Add "-SP" for optional stainless steel test plug.

Note: A 1" undersize cutter is required for flanges 14" and larger. Oversize outlets are available by special request.

Note: Highlighted ranges are recommended for ductile iron pipe, pit cast and C900/C905 pipe applications.

FEATURES

- Body and straps are made of type 304 stainless steel. Flange can be either type 304 stainless steel or ASTM A36 carbon steel. All welds are fully passivated for corrosion resistance
- Certified to ANSI/NSF Standard 61
- Complies with AWWA C223 and MSS SP-124
- 14"-16" rated to 200 psi. 18"-20" rated to 175 psi. 24" rated to 150 psi. Rating not to exceed the pressure rating of the pipe.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

Submitted By: