



# SUBMITTAL INFORMATION

## Stainless Steel Tapping Sleeve - (FTSS-xxxx-xx-MJ-U100 style)



### TAPPING SLEEVE WITH STAINLESS STEEL OR CARBON STEEL MECHANICAL JOINT OUTLET

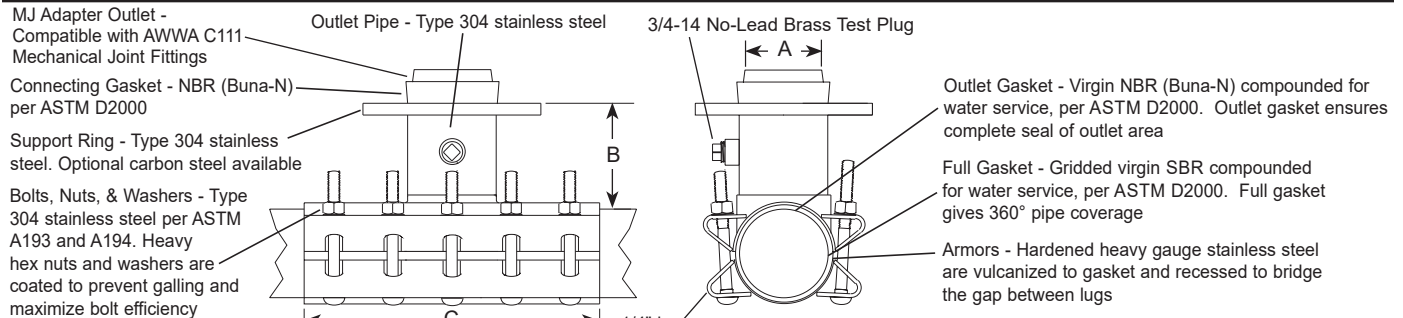

NOM. PIPE SIZE	SLEEVE O.D. RANGE (IN.)	CATALOG NUMBER	FLANGED OUTLET SIZE	NOM. DIM.-INCHES			MIN. NO. BOLTS	BOLT DIA.	APPROX. WT. (LBS.)	✓ SUBMITTED ITEM(S)
				OUTLET PIPE ID	TOP OF PIPE TO TOP OF FLANGE	WIDTH				
				A	B	C				
14"	15.22-15.70	FTSS-1570-xx-MJ-U100	2	3-1/4	5-3/8	16	10	3/4"	73	
			3	3-1/4	4-15/16	16	10	3/4"	74	
	15.80-16.20 16.48-16.88	FTSS-1620-xx-MJ-U100 FTSS-1688-xx-MJ-U100	4	4-1/4	4-15/16	16	10	3/4"	75	
			6	6-13/32	5-1/4	16	10	3/4"	82	
			8	8-13/32	5-3/8	20	14	3/4"	102	
			10	10-15/32	5-7/8	20	14	3/4"	110	
			12	12-13/32	6	24	16	3/4"	146	
			14	13-1/2	6-1/8	24	16	3/4"	160	
16"	17.32-17.80	FTSS-1780-xx-MJ-U100	2	3-1/4	5-3/8	16	10	3/4"	76	
			3	3-1/4	4-15/16	16	10	3/4"	77	
	17.75-18.15 18.15-18.62 18.60-19.00 18.80-19.20	FTSS-1815-xx-MJ-U100 FTSS-1862-xx-MJ-U100 FTSS-1900-xx-MJ-U100 FTSS-1920-xx-MJ-U100	4	4-1/4	4-15/16	16	10	3/4"	78	
			6	6-13/32	5-1/4	16	10	3/4"	84	
			8	8-13/32	5-3/8	20	14	3/4"	104	
			10	10-15/32	5-7/8	20	14	3/4"	114	
			12	12-13/32	6	24	16	3/4"	150	
			14	13-1/2	6-1/8	24	16	3/4"	188	
			16	15-1/2	6-1/8	32	20	3/4"	195	
18"	19.42-19.92	FTSS-1992-xx-MJ-U100	2	3-1/4	5-3/8	16	10	3/4"	82	
			3	3-1/4	4-15/16	16	10	3/4"	83	
			4	4-1/4	4-15/16	16	10	3/4"	84	
			6	6-13/32	5-1/4	16	10	3/4"	90	
	19.80-20.20	FTSS-2020-xx-MJ-U100	8	8-13/32	5-3/8	20	14	3/4"	112	
			10	10-15/32	5-7/8	20	14	3/4"	120	
			12	12-13/32	6	24	16	3/4"	160	
			14	13-1/2	6-1/8	24	16	3/4"	190	
			16	15-1/2	6-1/8	32	20	3/4"	200	
			18	17-1/2	6-1/8	36	24	3/4"	210	

\* For carbon steel outlet, add "A" to the catalog number. Example: The complete FTSS catalog number for a 16" pipe (17.40 O.D.) with a 12" stainless steel MJ outlet is FTSS-1780-12-MJ-U100, and the catalog number for a carbon steel outlet is FTSS-1780-12A-MJ-U100.

\*\*Size-on-size not available.

**Note:** Highlighted ranges are recommended for ductile iron pipe, pit cast and C900/C905 pipe applications.

### FEATURES

- Body, straps and hardware are made of type 304 stainless steel. Support ring can be either type 304 stainless steel or ASTM A36 carbon steel. All welds are fully passivated for corrosion resistance
- Certified to ANSI/NSF Standard 61
- Complies with AWWA C223 and MSS SP-124
- 14"-16" rated to 200 psi. 18"-20" rated to 175 psi. 24" rated to 150 psi. Rating not to exceed the pressure rating of the pipe.
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

04/26/23

Submitted By: