



SUBMITTAL INFORMATION

Stainless Steel Tapping Sleeve - (FTSS-xxxx-xx-MJ-U100 style)



TAPPING SLEEVE WITH STAINLESS STEEL OR CARBON STEEL MECHANICAL JOINT OUTLET

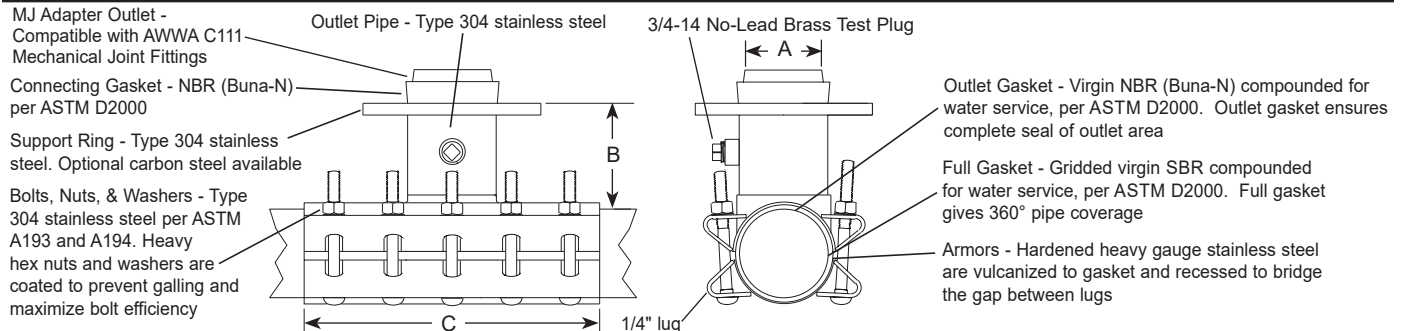

NOM. PIPE SIZE (IN.)	SLEEVE O.D. RANGE (IN.)	CATALOG NUMBER	FLANGED OUTLET SIZE	NOM. DIM.- INCHES			MIN. NO. BOLTS	BOLT DIA. (IN.)	APPROX. WT. (LBS.)	✓ SUBMITTED ITEM(S)
				OUTLET PIPE ID	TOP OF PIPE TO TOP OF FLANGE	WIDTH				
				A	B	C				
20	20.20-20.60 20.90-21.30 21.40-21.80 21.86-22.26 22.30-22.70 23.40-23.80	FTSS-2060-xx-MJ-U100** FTSS-2130-xx-MJ-U100 FTSS-2180-xx-MJ-U100 FTSS-2226-xx-MJ-U100 FTSS-2270-xx-MJ-U100 FTSS-2380-xx-MJ-U100	2	3-1/4	5-3/8	16	10	3/4	84	
			3	3-1/4	4-15/16	16	10	3/4	85	
			4	4-1/4	4-15/16	16	10	3/4	86	
			6	6-13/32	5-1/4	16	10	3/4	92	
			8	8-13/32	5-3/8	20	14	3/4	114	
			10	10-15/32	5-7/8	20	14	3/4	123	
			12	12-13/32	6	24	16	3/4	162	
			14	13-1/2	6-1/8	24	16	3/4	195	
			16	15-1/2	6-1/8	32	20	3/4	205	
			18	17-1/2	6-1/8	36	24	3/4	215	
24	23.80-24.20 25.60-26.00 25.80-26.30 26.20-26.60	FTSS-2420-xx-MJ-U100** FTSS-2600-xx-MJ-U100 FTSS-2630-xx-MJ-U100 FTSS-2660-xx-MJ-U100	2	3-1/4	5-3/8	16	10	3/4	95	
			3	3-1/4	4-15/16	16	10	3/4	96	
			4	4-1/4	4-15/16	16	10	3/4	97	
			6	6-13/32	5-1/4	16	10	3/4	103	
			8	8-13/32	5-3/8	20	14	3/4	127	
			10	10-15/32	5-7/8	20	14	3/4	136	
			12	12-13/32	6	24	16	3/4	178	
			14	13-1/2	6-1/8	24	16	3/4	199	
			16	15-1/2	6-1/8	32	20	3/4	210	
			18	17-1/2	6-1/8	36	24	3/4	224	
			20	19-1/2	6-1/8	40	24	3/4	230	
			24	23-1/2	6-1/8	48	28	3/4	256	

* For carbon steel outlet, add "A" to the catalog number. Example: The complete FTSS catalog number for a 20" pipe (21.40 O.D.) with a 12" stainless steel MJ outlet is FTSS-2180-12-MJ-U100. For a carbon steel outlet the number is FTSS-2180-12A-MJ-U100.

**Size-on-size not available.

Note: Highlighted ranges are recommended for ductile iron pipe, pit cast and C900/C905 pipe applications.

FEATURES

- Body, straps and hardware are made of type 304 stainless steel. Support ring can be either type 304 stainless steel or ASTM A36 carbon steel.
- All welds are fully passivated for corrosion resistance
- Certified to ANSI/NSF Standard 61
- Outlet gasket is NBR (Buna-N) rubber per ASTM D2000
- Complies with AWWA C223 and MSS SP-124
- 14"-16" rated to 200 psi. 18"-20" rated to 175 psi. 24" rated to 150 psi. Rating not to exceed the pressure rating of the pipe.
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

11/18/24

Submitted By: