



SUBMITTAL INFORMATION

Stainless Steel Tapping Sleeve - (FTSS-xxxx-xx-MJ-U style)



TAPPING SLEEVE WITH STAINLESS STEEL OR CARBON STEEL MECHANICAL JOINT OUTLET

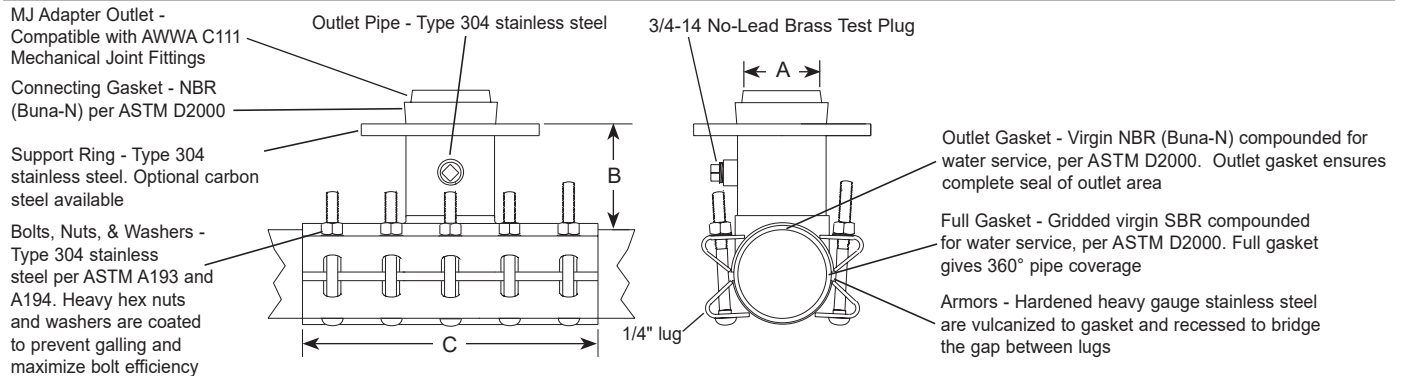

NOM. PIPE SIZE	SLEEVE O.D. RANGE (IN.)	CATALOG NUMBER	FLANGED OUTLET SIZE	NOM. DIM. - INCHES			MIN. NO. BOLTS	BOLT DIA.	APPROX. WT. (LBS.)	✓ SUBMITTED ITEM(S)
				OUTLET PIPE ID	TOP OF PIPE TO TOP OF FLANGE	WIDTH				
				A	B	C				
14"	15.30-15.70	FTSS-1570-xx-MJ-U	2	3-1/4	5-3/8	16	10	3/4"	73	
			3	3-1/4	4-15/16	16	10	3/4"	74	
	15.80-16.20	FTSS-1620-xx-MJ-U	4	4-1/4	4-15/16	16	10	3/4"	75	
			6	6-13/32	5-1/4	16	10	3/4"	82	
			8	8-13/32	5-3/8	20	14	3/4"	102	
			10	10-15/32	5-7/8	20	14	3/4"	110	
			12	12-13/32	6	24	16	3/4"	146	
			14	13-1/2	6-1/8	24	16	3/4"	160	
16"	17.40-17.80 17.75-18.15 18.15-18.60 18.80-19.20	FTSS-1780-xx-MJ-U FTSS-1815-xx-MJ-U FTSS-1860-xx-MJ-U FTSS-1920-xx-MJ-U	2	3-1/4	5-3/8	16	10	3/4"	76	
			3	3-1/4	4-15/16	16	10	3/4"	77	
			4	4-1/4	4-15/16	16	10	3/4"	78	
			6	6-13/32	5-1/4	16	10	3/4"	84	
			8	8-13/32	5-3/8	20	14	3/4"	104	
			10	10-15/32	5-7/8	20	14	3/4"	114	
			12	12-13/32	6	24	16	3/4"	150	
			14	13-1/2	6-1/8	24	16	3/4"	188	
18"	19.50-19.92 19.80-20.20	FTSS-1992-xx-MJ-U FTSS-2020-xx-MJ-U	16	15-1/2	6-1/8	32	20	3/4"	195	
			2	3-1/4	5-3/8	16	10	3/4"	82	
			3	3-1/4	4-15/16	16	10	3/4"	83	
			4	4-1/4	4-15/16	16	10	3/4"	84	
			6	6-13/32	5-1/4	16	10	3/4"	90	
			8	8-13/32	5-3/8	20	14	3/4"	112	
			10	10-15/32	5-7/8	20	14	3/4"	120	
			12	12-13/32	6	24	16	3/4"	160	
14	13-1/2	6-1/8	24	16	3/4"	190				
16	15-1/2	6-1/8	32	20	3/4"	200				
18	17-1/2	6-1/8	36	24	3/4"	210				

* For carbon steel outlet, add "A" to the catalog number. Example: The complete FTSS catalog number for a 16" pipe (17.40 O.D.) with a 12" stainless steel MJ outlet is FTSS-1780-12-MJ-U. For a carbon steel outlet the number is FTSS-1780-12A-MJ-U.

Note: A 1" undersize cutter is required for flanges 14" and larger. Oversize outlets are available by special request.

FEATURES

- Body, straps and hardware are made of type 304 stainless steel. Support ring can be either type 304 stainless steel or ASTM A36 carbon steel. All welds are fully passivated for corrosion resistance
- Certified to ANSI/NSF Standard 61
- Complies with AWWA C223
- 14"-16" rated to 200 psi. 18"-20" rated to 175 psi. 24" rated to 150 psi. Rating not to exceed the pressure rating of the pipe.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

11/18/22

Submitted By: