



SUBMITTAL INFORMATION

Stainless Steel Tapping Sleeve 30"-36" - (FTSS-xxxx-xx-Q style)



TAPPING SLEEVE WITH STAINLESS STEEL OR CARBON STEEL FLANGE

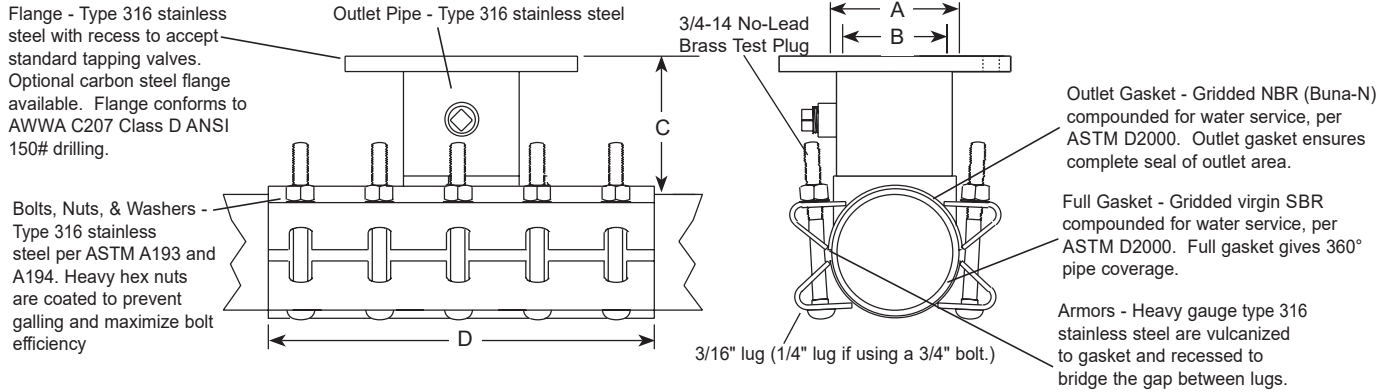

NOM. PIPE SIZE	SLEEVE O.D. RANGE (IN.)	FLANGED OUTLET SIZE	NOMINAL DIMENSIONS - INCHES				MIN. NO. OF BOLTS	BOLT DIA. (IN.)	APPROX. WT. (LBS.)	*SLEEVE NUMBER	✓ SUBMITTED ITEM(s)
			COUNTER-BORE ID	OUTLET PIPE ID	TOP OF PIPE TO TOP OF FLANGE	WIDTH					
			A	B	C	D					
30"	29.70-30.20	2	3-1/16	3-1/4	5-1/16	16	10	3/4	211	FTSS-3020-xx-Q	
		3	4-1/16	3-1/4	5-1/16	16	10	3/4	212		
	30.40-30.80	4	5-1/16	4-1/4	5-1/16	16	10	3/4	254	FTSS-3080-xx-Q	
		6	7-1/16	6-13/32	5-1/16	16	10	3/4	192		
	31.72-32.22	8	9-1/16	8-13/32	5-1/16	20	14	3/4	209	FTSS-3222-xx-Q	
		10	11-1/16	10-15/32	5-1/16	20	14	3/4	274		
	31.57-32.27	12	13-1/16	12-13/32	5-1/16	24	16	3/4	344	FTSS-3227-xx-Q	
		14	15-9/32	13-1/2	6-1/8	24	16	3/4	418		
	32.30-32.80	16	17-9/32	15-1/2	6-1/8	32	20	3/4	492	FTSS-3280-xx-Q	
		18	19-1/2	17-1/2	6-1/8	36	24	3/4	552		
	32.60-33.10	20	21-1/2	19-1/2	6-1/8	40	24	3/4	623	FTSS-3300-xx-Q	
		24	25-1/2	23-1/2	6-1/8	48	28	3/4	747		
36"	33.10-33.60	30	31-1/16	29-9/16	6-1/4	60	36	3/4	1067	FTSS-3360-xx-Q	
		2	3-1/16	3-1/4	5-1/16	16	10	3/4	253		
	34.60-35.10	3	4-1/16	3-1/4	5-1/16	16	10	3/4	254		
		4	5-1/16	4-1/4	5-1/16	16	10	3/4	256	FTSS-3510-xx-Q	
	35.70-36.20	6	7-1/16	6-13/32	5-1/16	16	10	3/4	260		
		8	9-1/16	8-13/32	5-1/16	20	14	3/4	266	FTSS-3620-xx-Q	
	36.10-36.60	10	11-1/16	10-15/32	5-1/16	20	14	3/4	315		
		12	13-1/16	12-13/32	5-1/16	24	16	3/4	397	FTSS-3660-xx-Q	
	37.80-38.30	14	15-9/32	13-1/2	6-1/8	24	16	3/4	472		
		16	17-9/32	15-1/2	6-1/8	32	20	3/4	507	FTSS-3830-xx-Q	
	38.20-38.70	18	19-1/2	17-1/2	6-1/8	36	24	3/4	630	FTSS-3870-xx-Q	
		20	21-1/2	19-1/2	6-1/8	40	24	3/4	735		
	38.60-39.10	24	25-1/2	23-1/2	6-1/8	48	28	3/4	836	FTSS-3910-xx-Q	
		30	31-1/16	29-9/16	6-1/4	60	36	3/4	1033		
		36	37-1/16	35-9/16	6-1/4	60	36	3/4	1150		

* The complete FTSS catalog number for a 30" pipe (32.00 O.D.) with a 12" stainless steel flange is FTSS-3222-12-Q. For carbon steel flange, add "A" to the catalog number. Example: FTSS-3222-12A-Q.

Note: A 1" nonzero cutter is required for flanges 14" and larger. Oversize outlets are available by special request.

Note: Highlighted ranges are recommended for ductile iron pipe, pit cast and C900/C905 pipe applications

FEATURES

- Body, straps and UNC threaded bolts are made of type 316 stainless steel
Flange can be either type 316 stainless steel or ASTM A36 carbon steel. All welds are fully passivated for corrosion resistance
- Outlet gasket is NBR (Buna-N) per ASTM D2000
- Other sizes and ranges available. Contact your Ford Meter Box® representative for details.
- Removable bolts are type 316 stainless steel

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

04/17/24

Submitted By: