



SUBMITTAL INFORMATION

Stainless Steel Tapping Sleeve - (FTSSP-xxx-x-MJ-U100 style)



STAINLESS STEEL TAPPING SLEEVE WITH MECHANICAL JOINT OUTLET FOR HDPE PIPE

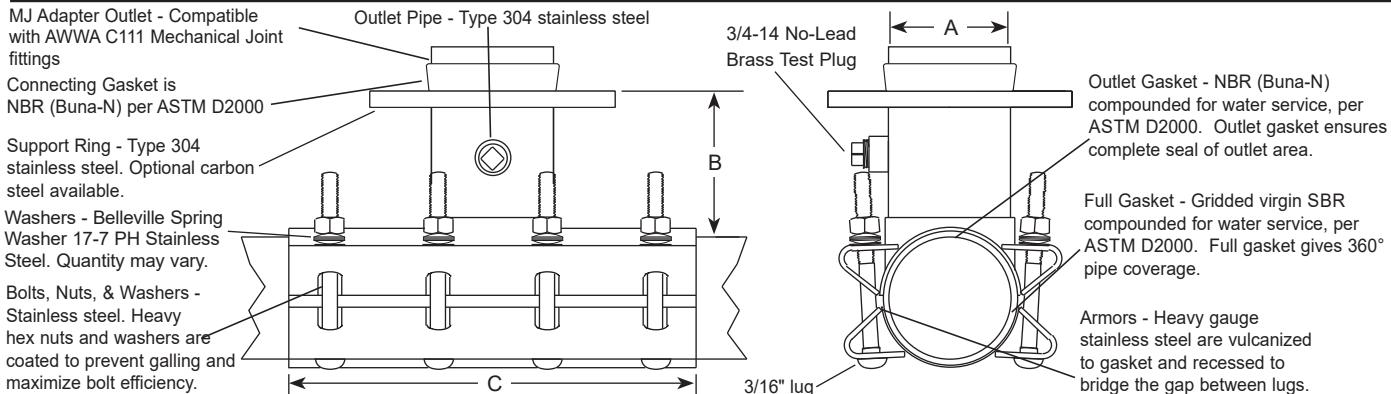

NOM. PIPE SIZE (IN.)	SLEEVE O.D. RANGE (IN.)	CATALOG NUMBER	FLANGED OUTLET SIZE (IN.)	NOMINAL DIMENSIONS - INCHES			MIN. NO. BOLTS	BOLT DIA.	APPROX. WT. (LBS.)	✓ SUBMITTED ITEM(S)				
				OUTLET PIPE ID	TOP OF PIPE TO TOP OF FLANGE	WIDTH								
4	4.50	FTSSP-450-x-MJ-U100	2	3-1/4	5-3/8	15	8	5/8"	36					
	4.80	FTSSP-480-x-MJ-U100	3	3-1/4	4-15/16	15	8	5/8"	37					
6	6.63	FTSSP-663-x-MJ-U100	2	3-1/4	5-3/8	15	8	5/8"	40					
	6.90	FTSSP-690-x-MJ-U100	3	3-1/4	4-15/16	15	8	5/8"	41					
			4	4-1/4	4-15/16	15	8	5/8"	42					
8	8.63	FTSSP-863-x-MJ-U100	2	3-1/4	5-3/8	15	8	5/8"	40					
	9.05	FTSSP-905-x-MJ-U100	3	3-1/4	4-15/16	15	8	5/8"	41					
			4	4-1/4	4-15/16	15	8	5/8"	42					
			6	6-13/32	5-1/4	15	8	5/8"	49					
10			2	3-1/4	5-3/8	15	8	5/8"	45					
	10.75	FTSSP-1075-x-MJ-U100	3	3-1/4	4-15/16	15	8	5/8"	46					
	11.10	FTSSP-1110-x-MJ-U100	4	4-1/4	4-15/16	15	8	5/8"	47					
			6	6-13/32	5-1/4	15	8	5/8"	53					
			8	8-13/32	5-3/8	20	12	5/8"	79					
12			2	3-1/4	5-3/8	15	8	5/8"	48					
	12.75	FTSSP-1275-x-MJ-U100	3	3-1/4	4-15/16	15	8	5/8"	49					
	13.20	FTSSP-1320-x-MJ-U100	4	4-1/4	4-15/16	15	8	5/8"	50					
			6	6-13/32	5-1/4	15	8	5/8"	55					
			8	8-13/32	5-3/8	20	12	5/8"	86					
			10	10-15/32	5-7/8	20	12	3/4"	104					

* To order: Add outlet size to catalog number. Example: The complete FTSSP catalog number for a 6" pipe (6.90 O.D.) with a 4" stainless steel outlet is FTSSP-690-4-MJ-U100. For a carbon steel outlet, add "A" to the catalog number. Example: FTSSP-690-4A-MJ-U100

FEATURES

- Body, straps and UNC threaded bolts are made of type 304 stainless steel. Support ring can be either stainless steel or ASTM A36 carbon steel
- All welds are fully passivated for corrosion resistance
- Belleville spring washers allow for limited pipe expansion and contraction
- Outlet gasket is NBR (Buna-N) rubber per ASTM 2000
- Meets AWWA C223
- Tapping sleeves rated for the lesser of either 250 PSI or the pipe rating on sizes 4" - 12"
- Certified to NSF Standard 61
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

05/06/25

Submitted By: