

## SUBMITTAL INFORMATION





## TAPPING SLEEVE WITH STAINLESS STEEL OR CARBON STEEL FLANGE FOR HDPE PIPE

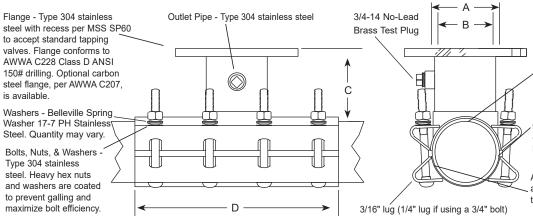

Outlet Gasket - NBR (Buna-N) compounded for water service, per ASTM D2000. Outlet gasket assures complete seal of outlet area.

Full Gasket - Gridded virgin SBR compounded for water service, per ASTM D2000. Full gasket gives 360° pipe coverage.

Armors - Heavy gauge stainless steel are vulcanized to gasket and recessed to bridge the gap between lugs.

	SLEEVE O.D. RANGE (IN.)	CATALOG NUMBER	FLANGED OUTLET SIZE (IN.)	Nominal Dimensions - Inches							
Nom. Pipe Size (In.)				COUNTER- BORE ID OUTLET PIPE ID	TOP OF PIPE TO TOP OF FLANGE	WIDTH	Min. No. Bolts	Bolt Dia.	APPROX. Wt. (LBS.)	✓ SUBMITTED ITEM(S)	
				Α	В	С	D				
4	4.50	FTSSP-450-	2	3-1/16	3-1/4	5-3/8	15	8	5/8"	36	
	4.80	FTSSP-480-	3	4-1/16	3-1/4	4-15/16	15	8	5/8"	37	
6	6.63 6.90	FTSSP-663- FTSSP-690-	2	3-1/16	3-1/4	5-3/8	15	8	5/8"	40	
			3	4-1/16	3-1/4	4-15/16	15	8	5/8"	41	
			4	5-1/16	4-1/4	4-15/16	15	8	5/8"	42	
8	8.63 9.05	FTSSP-863- FTSSP-905-	2	3-1/16	3-1/4	5-3/8	15	8	5/8"	40	
			3	4-1/16	3-1/4	4-15/16	15	8	5/8"	41	
			4	5-1/16	4-1/4	4-15/16	15	8	5/8"	42	
			6	7-1/16	6-13/32	5-1/4	15	8	5/8"	49	
10	10.75 11.10	FTSSP-1075- FTSSP-1110-	2	3-1/16	3-1/4	5-3/8	15	8	5/8"	45	
			3	4-1/16	3-1/4	4-15/16	15	8	5/8"	46	
			4	5-1/16	4-1/4	4-15/16	15	8	5/8"	47	
			6	7-1/16	6-13/32	5-1/4	15	8	5/8"	53	
			8	9-1/16	8-13/32	5-3/8	20	12	5/8"	79	
12	12.75 13.20	FTSSP-1275- FTSSP-1320-	2	3-1/16	3-1/4	5-3/8	15	8	5/8"	48	
			3	4-1/16	3-1/4	4-15/16	15	8	5/8"	49	
			4	5-1/16	4-1/4	4-15/16	15	8	5/8"	50	
			6	7-1/16	6-13/32	5-1/4	15	8	5/8"	55	
			8	9-1/16	8-13/32	5-3/8	20	12	5/8"	86	
			10	11-1/16	10-15/32	5-7/8	20	12	3/4"	104	

<sup>\*</sup> To order: Add flanged outlet size to catalog number. Example: The complete FTSSP catalog number for a 6" pipe (6.90 O.D.) with a 4" stainless steel flange is FTSSP-690-4. For a carbon steel flange, add "A" to the catalog number. Example: FTSSP-690-4A

## **FEATURES**

- Body, straps and UNC threaded bolts are made of type 304 stainless steel. Flange can be either stainless steel or ASTM A36 carbon steel. All sleeves are fully passivated for corrosion resistance.
- Outlet gasket is NBR (Buna-N) rubber per ASTM 2000
- Meets AWWA C223
- Tapping sleeves rated for the lesser of either 250 PSI or the pipe rating on sizes 4" 12"

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



## The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487 Overseas Fax: 260-563-0167

www.fordmeterbox.com

Submitted By:

03/07/23