



SUBMITTAL INFORMATION

MJ Gripping Style Restraint - (FUR-C-x-RB-I style)



**4"-12" UNI-RING MECHANICAL JOINT RING RESTRAINT
FOR DIPS, AWWA C900 PVC, AWWA C906 HDPE, AWWA C909 PVCO, AND DUCTILE IRON**

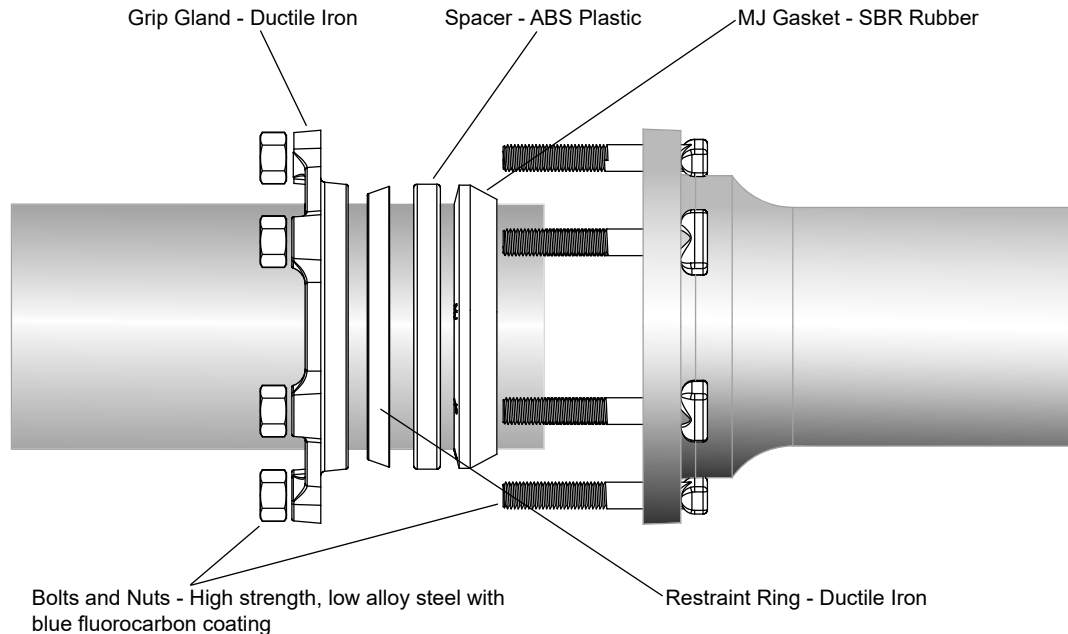

NOM. PIPE SIZE	OD	CATALOG NUMBER	APPROX. WEIGHT	NUMBER OF BOLTS	BOLT SIZE	✓ SUBMITTED ITEMS
4"	4.80	FUR-C-4-RB-I	9.0	4	3/4"x 4"	
6"	6.90	FUR-C-6-RB-I	12.0	6	3/4"x 4"	
8"	9.05	FUR-C-8-RB-I	15.0	6	3/4"x 4-1/2"	
10"	11.10	FUR-C-10-RB-I	21.0	8	3/4"x 4-1/2"	
12"	13.20	FUR-C-12-RB-I	24.0	8	3/4"x 4-1/2"	

Note: Ford recommends the use of an insert stiffener when used on HDPE.

Note: Spacer ring must be used on PVCO, thin-walled PVC and HDPE.

Note: Shorter bolts may be required when used with MJ x Flange valves and fittings

FEATURES

- Fits DIPS, AWWA C900 PVC, AWWA C906 HDPE, AWWA C909 PVCO, and ductile iron
- Restraint ring: Ductile iron per ASTM A536, Grade 65-45-12, hardened to 40-50 RC with black e-coat epoxy
- Gland: Ductile iron per ASTM A536, Grade 65-45-12 with black e-coat epoxy and green topcoat for identification purposes
- Gasket: SBR rubber per ASTM D2000 - NSF 61 approved
- Bolts & Nuts: High strength, low alloy steel per ASTM A242 and AWWA C111 with blue fluorocarbon coating
- Spacer ring must be used on thin-walled PVC, PVCO and HDPE
- 4"-8" FM Approved on PVC, PVCO and ductile iron
- 2:1 safety factor at the full rated pressure of the pipe

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



02/06/19

Submitted By: