



# SUBMITTAL INFORMATION

## Cut-In Dual Check Valve Assembly - (HHL34-323-77-813-NL style)



### METER SADDLE NUT INLET BY PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) OUTLET

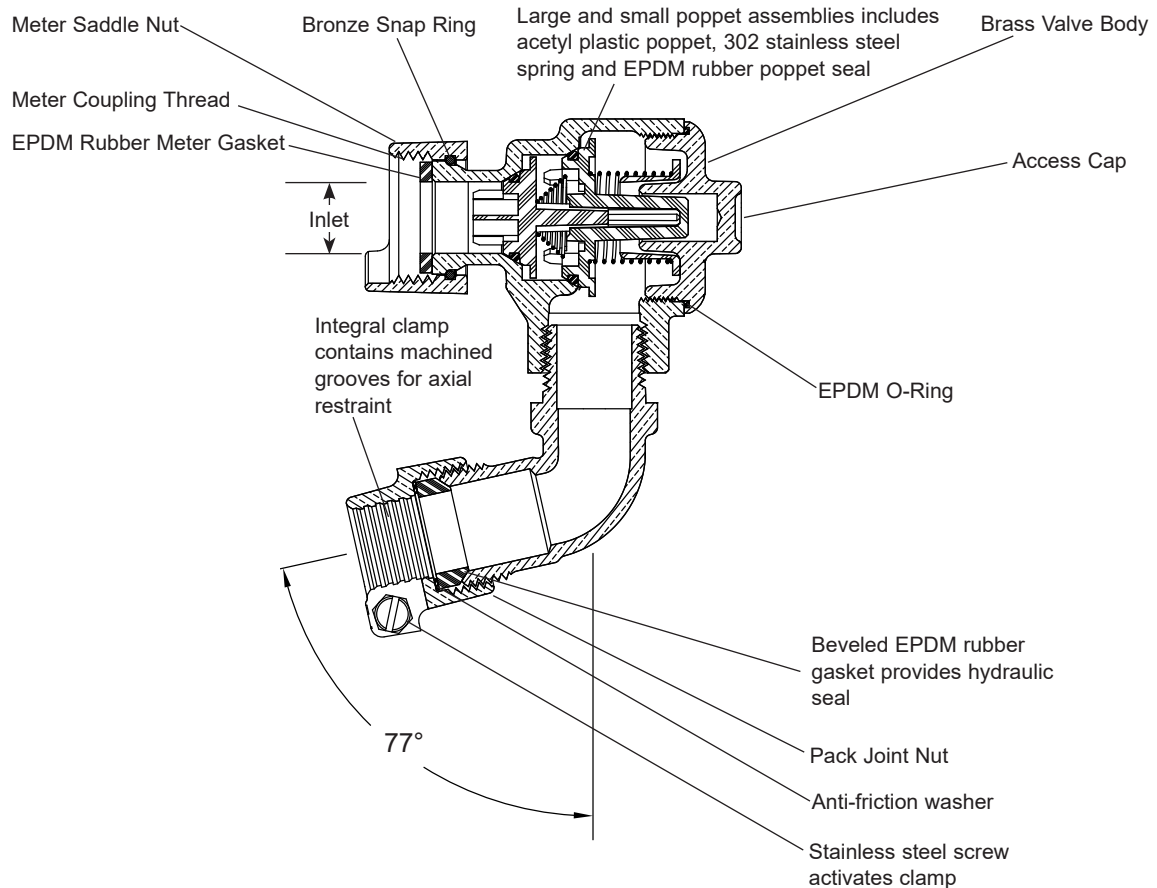

VALVE SIZE	METER INLET SIZE	OUTLET SIZE	APPROX. Wt. LBS	PART NUMBER	✓ SUBMITTED ITEM(S)
3/4"	5/8"x3/4" & 3/4"	13/16"	1.9	HHL34-323-77-813-NL	

**Note:** Ford recommends insert stiffeners when using plastic pipe or tubing

### FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- In-Line accessible for quick inspection and replacement of internal working parts without removing the valve from the service line. Replacement kits are available.
- 175 PSI maximum working water pressure
- 180-degree Fahrenheit maximum constant temperature
- Conforms to AWWA C700 for meter threads
- ASSE 1024 approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



### The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
 Phone: 260-563-3171 / Fax: 800-826-3487  
 Overseas Fax: 260-563-0167  
 www.fordmeterbox.com

05/24/22

Submitted By: