


# SUBMITTAL INFORMATION

## Angle Key Meter Valves - (KV43-xxxW-U-AWT-NL style)



**ULTRA-TITE FOR PLASTIC OR COPPER TUBING (CTS) INLET BY METER SWIVEL NUT OUTLET, ASSEMBLED WATERTIGHT**

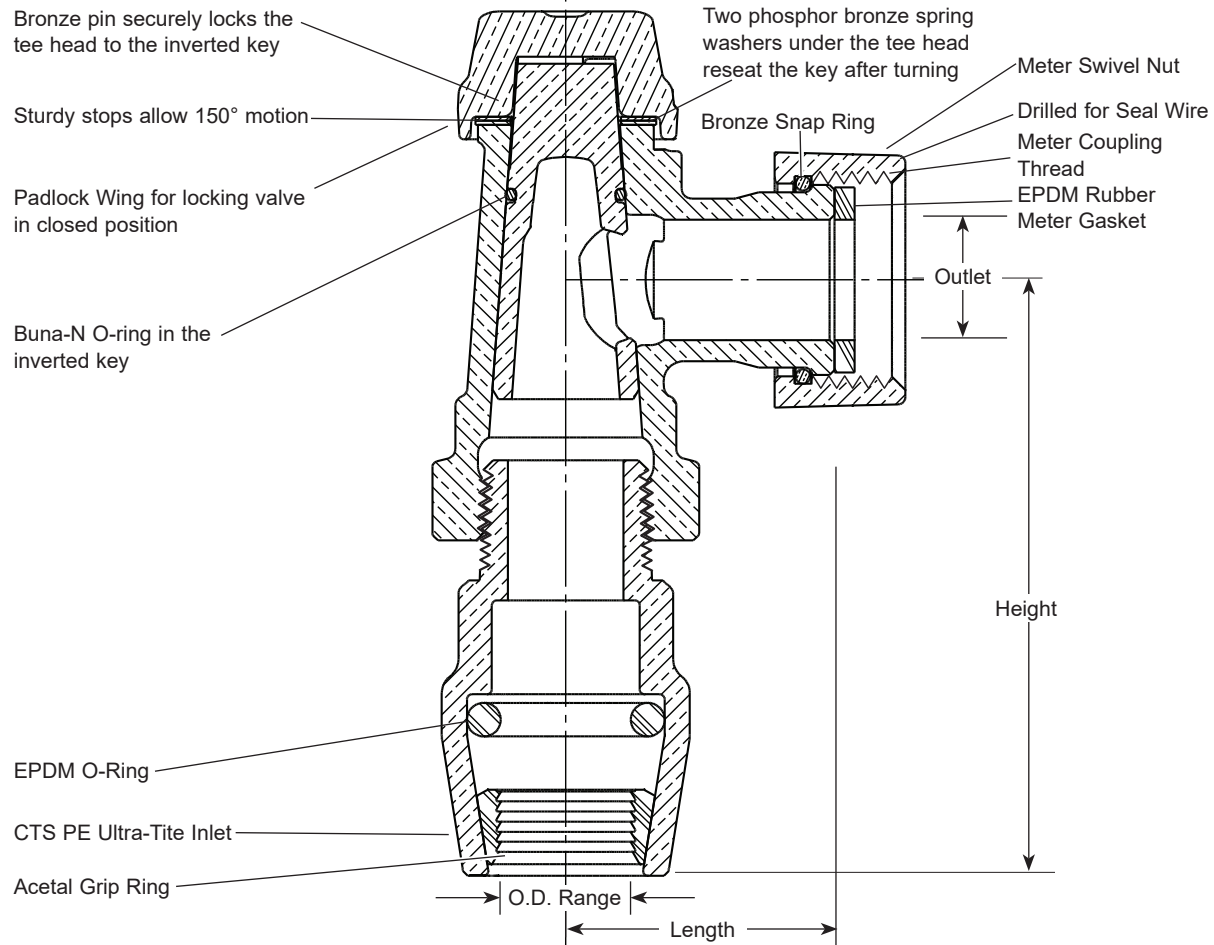

VALVE SIZE	SERVICE LINE SIZE INLET	METER SIZE OUTLET	LENGTH (IN.)	HEIGHT (IN.)	APPROX. WT. LBS	PART NUMBER	✓ SUBMITTED ITEM(S)
3/4"	3/4"	5/8"x3/4" & 3/4"	1-43/64	3-23/32	1.8	KV43-332W-U-AWT-NL	
3/4"	1"	5/8"x3/4" & 3/4"	1-43/64	3-5/8	2.8	KV43-342W-U-AWT-NL	
1"	1"	1"	1-15/16	3-7/8	3.4	KV43-444W-U-AWT-NL	

### FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Padlock wing for locking the valve in a closed position
- Meets 100 PSI working pressure requirements of AWWA Standard C800
- Ends are integral or secured with adhesive to prevent unintentional disassembly

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
[www.fordmeterbox.com](http://www.fordmeterbox.com)

12/17/25

Submitted By: