



SUBMITTAL INFORMATION

Yoke Ell Couplings - (L94-xx-G-NL style)



METER YOKE NOSE BY GRIP JOINT FOR COPPER OR PLASTIC TUBING (CTS)

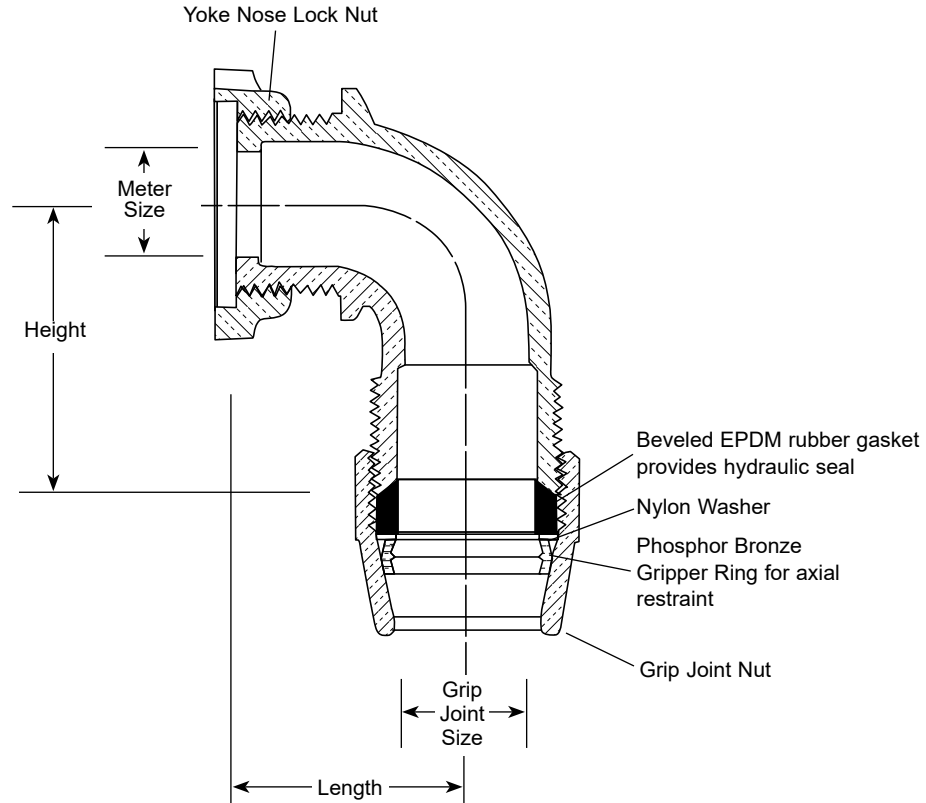

Due to design variations related to sizing, items may differ from images above.

YOKE END SIZE	GRIP JOINT SIZE	LENGTH	HEIGHT	APPROX. Wt. LBS	PART NUMBER	✓ SUBMITTED ITEM(s)
5/8"	3/4"	1-1/2"	1-7/8"	0.9	**L94-13-G-NL	
5/8"x3/4"&3/4"	3/4"	1-1/2"	1-7/8"	0.9	**L94-23-G-NL	
5/8"	1"	1-3/4"	1-3/4"	1.0	L94-14-G-NL	
5/8"x3/4"&3/4"	1"	1-3/4"	1-3/4"	1.0	L94-24-G-NL	
1"	1"	1-15/16"	1-13/16"	1.3	L94-44-G-NL	

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

Drain/Test Valve available - add "D" to catalog number

**Drain/Test Valve on top (not on side of fitting) - Add "TD" to catalog number

FEATURES

- All brass components that come in contact with potable water conform to AWWA Standard C800 (UNS NO C89833)
- The product has the letters "NL" cast into the main body for proper identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5)
- Body design provides larger, more rugged wrench flats for proper installation
- Yoke ell couplings may be used on either end of the yoke
- EPDM rubber yoke nose gasket sold separately: GT-112 (5/8"), GT-118 (3/4") and GT-123 (1")

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

04/02/20

Submitted By: