



SUBMITTAL INFORMATION

Linesetter - (LSVBHH41-xxxWR-Q-NL style)



ANGLE BALL VALVE BY ANGLE DUAL CHECK VALVE

QUICK JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET BY DOUBLE PURPOSE UNION SWIVEL OUTLET

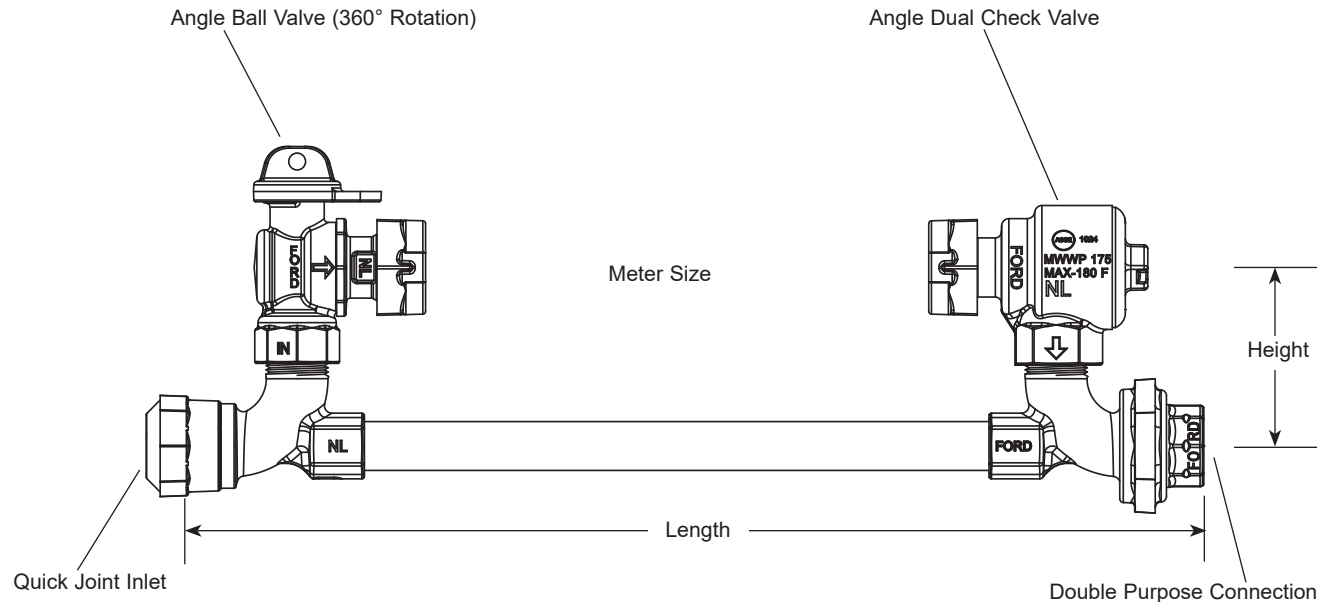

Linesetter Part Number

METER SIZE (IN.)	LENGTH (IN.)	HEIGHT (IN.)	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
5/8	15-3/4	3	5.0	LSVBHH41-133WR-Q-NL	
5/8 X 3/4	15-3/4	3	5.2	LSVBHH41-233WR-Q-NL	
3/4	17-1/4	3	5.5	LSVBHH41-333WR-Q-NL	
1	20-3/8	3-1/2	8.9	LSVBHH41-444WR-Q-NL	

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Copper conforms to ASTM B75 or B88, UNS C12200
- All Ford® Setters are assembled with lead-free solder
- Linesetters with ball valve and dual check valve are rated at 175 psi maximum working pressure
- Linesetters for 1" meters shall include brace eyes
- Double purpose union swivels will accommodate female iron pipe threads or flare copper
- ASSE 1024 approved dual check valve

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

07/01/24

Submitted By: