



SUBMITTAL INFORMATION

Ductile Iron Mechanical Joint Coupling - (MJC-xx-I style)



4" - 12" STYLE MJC COUPLINGS FOR JOINING PIPES OF NOMINAL SIZE

FOR DUCTILE IRON, PVC, C909, STEEL AND SDR35 SEWER PIPE APPLICATIONS

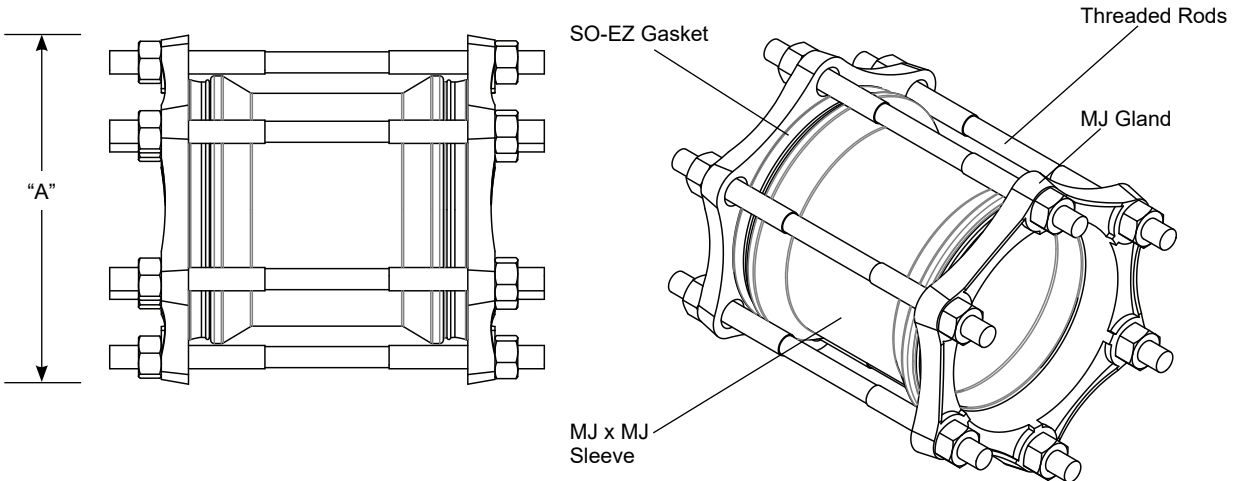

NOMINAL PIPE SIZE	PIPE O.D. RANGE (INCHES)	PIPE O.D. RANGE (MM)	SLEEVE LENGTH	DIMENSION "A"	DEGREES DEFLECTION	No. OF RODS	SIZE OF RODS	APPROX. WT. LBS	PART NUMBER	✓ SUBMITTED ITEM(S)
4"	4.21 - 4.80	106.9 - 121.9	7-1/2"	9.13"	5°	4	3/4" x 14"	28	MJC-4-I	
6"	6.27 - 6.90	159.3 - 175.3	7-1/2"	11.25"	5°	6	3/4" x 14"	43	MJC-6-I	
8"	8.40 - 9.05	213.4 - 229.9	7-1/2"	13.37"	5°	6	3/4" x 14"	51	MJC-8-I	
10"	10.50 - 11.10	266.7 - 281.9	7-1/2"	15.61"	5°	8	3/4" x 14"	72	MJC-10-I	
12"	12.50 - 13.20	317.5 - 335.3	7-1/2"	17.80"	5°	8	3/4" x 14"	78	MJC-12-I	

FEATURES

- MJ x MJ Sleeve: Ductile iron per ASTM A536, Grade 65-45-12, fusion bonded epoxy coating (Sleeve Coating is ANSI/NSF Standard 61 Approved)
- MJ Gland Ends: Ductile iron per ASTM A536, Grade 65-45-12, black epoxy coating
- Double End Rod & Nuts: High strength, low alloy steel per ASTM A242 and AWWA C111
Optional: Blue fluorocarbon or stainless steel
- Gaskets: SO-EZ gaskets, pre-lubricated SBR rubber to accommodate listed ranges. (ANSI/NSF Standard 61 Approved)
Optional: NBR (Buna-N) rubber
- Stab fit, no disassembly required
- 2:1 safety factor at the full-rated pressure of the pipe on which it is installed

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

07/16/18

Submitted By: