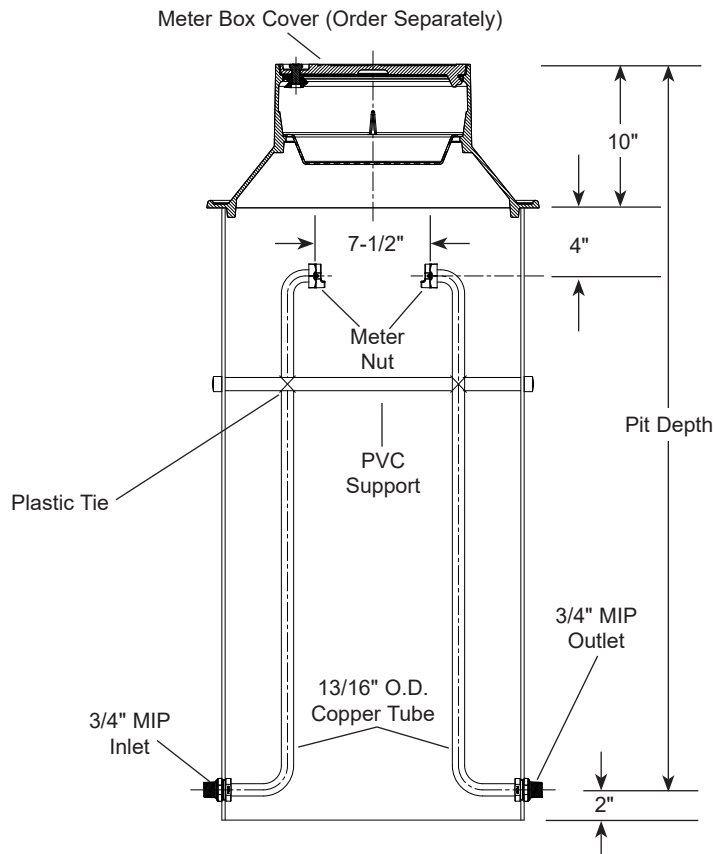# SUBMITTAL INFORMATION

Plastic Pitsetter *- (PD-288-xx-xx-NL style)*

MALE IRON PIPE THREAD INLET AND OUTLET - FOR 5/8"x3/4" METER

DOUBLE LID - METER NUT INLET AND OUTLET

Meter Box Cover (Order Separately)

10"

7-1/2"

4"

Meter Nut

Pit Depth

PVC Support

Plastic Tie

3/4" MIP Outlet

13/16" O.D. Copper Tube

3/4" MIP Inlet

2"

Pit Diameter and Depth	Catalog Number	✓ Submitted Item(s)
18"x36"	PD-288-18-36-NL	
18"x48"	PD-288-18-48-NL	
18"x60"	PD-288-18-60-NL	
18"x72"	PD-288-18-72-NL	
20"x36"	PD-288-20-36-NL	
20"x48"	PD-288-20-48-NL	
20"x60"	PD-288-20-60-NL	
20"x72"	PD-288-20-72-NL	

Note: "D" stands for Double Lid Cover

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Brass products certified to NSF/ANSI/CAN Standard 61
- Copper conforms to ASTM B75 or B88, UNS C12200
- All Ford® Setters are assembled with lead-free solder
- Meter is held rigidly and at the proper height for easy installation and removal.
- Meter Box Cover not included. Must be ordered separately.
- Service lines are a minimum of 2" from pit walls to prevent "frost jump" in colder climates.
- Easy installation - simply make inlet and outlet connections and install cover.
- When bottom of pit is below frost line, service and meter freeze-ups are greatly reduced or eliminated by the circulation of air from the warmer soil at the pit base.

Submitted By: