




SUBMITTAL INFORMATION

Plastic Pitsetter - (PDSBHC-244-xx-xx-NA-Q-NL style)



QUICK JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET AND OUTLET - FOR (TWO) 5/8" x 3/4" METERS

DUAL SERVICE SINGLE LID - (TWO) ANGLE BALL METER VALVE INLETS BY (TWO) ANGLE DUAL CARTRIDGE CHECK VALVE OUTLETS

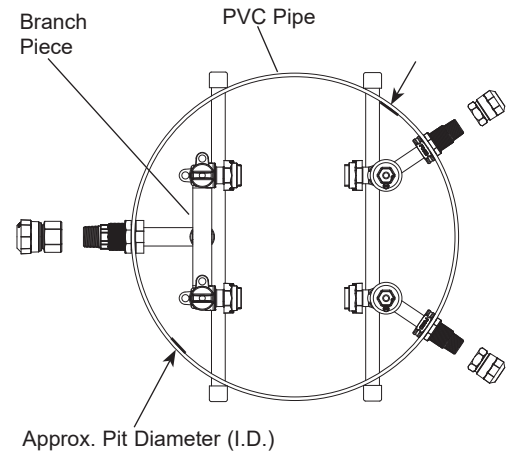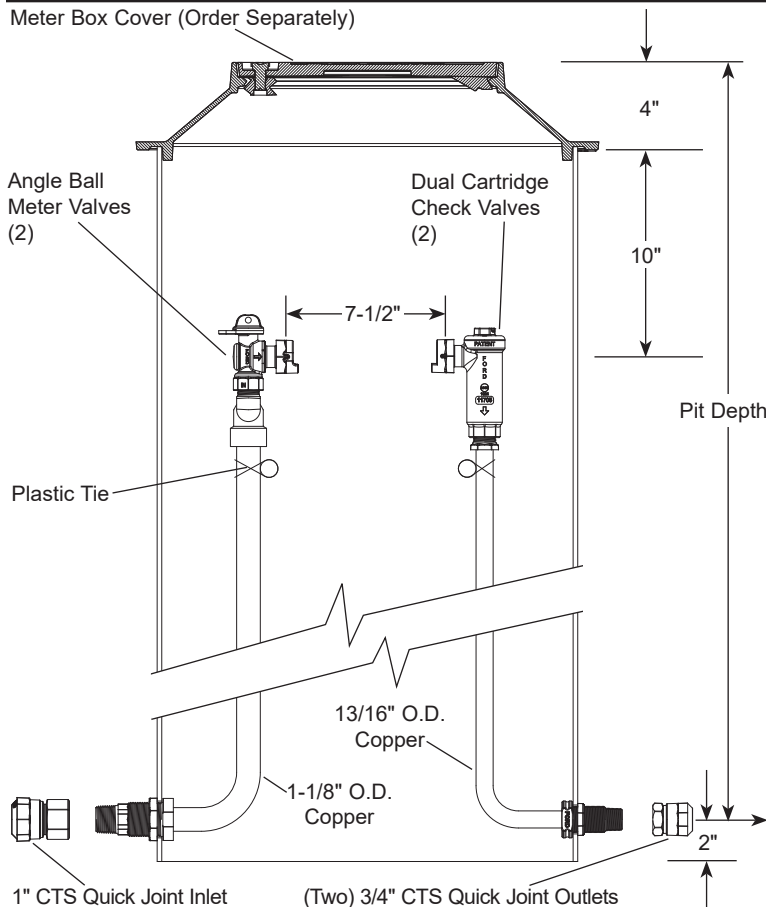

PIT DIAMETER AND DEPTH	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
18"x36"	PDSBHC-244-18-36-NA-Q-NL	
18"x48"	PDSBHC-244-18-48-NA-Q-NL	
18"x60"	PDSBHC-244-18-60-NA-Q-NL	
18"x72"	PDSBHC-244-18-72-NA-Q-NL	
20"x36"	PDSBHC-244-20-36-NA-Q-NL	
20"x48"	PDSBHC-244-20-48-NA-Q-NL	
20"x60"	PDSBHC-244-20-60-NA-Q-NL	
20"x72"	PDSBHC-244-20-72-NA-Q-NL	

Note: "D" stands for Dual Service Line
 "S" stands for Single Lid Cover
 Ford recommends using insert stiffeners with plastic pipe or tubing

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Brass products certified to NSF/ANSI Standard 61
- Copper conforms to ASTM B75 or B88, UNS C12200
- All Ford® Setters are assembled with lead-free solder
- Meter is held rigidly and at the proper height for easy installation and removal.
- Meter Box Cover not included. Must be ordered separately.
- Service lines are a minimum of 2" from pit walls to prevent "frost jump" in colder climates.
- Easy installation - simply make inlet and outlet connections and install cover.
- When bottom of pit is below frost line, service and meter freeze-ups are greatly reduced or eliminated by the circulation of air from the warmer soil at the pit base.
- CTS Quick Joint assemblies for connecting the service lines are shipped unassembled.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

09/27/22

Submitted By: