



SUBMITTAL INFORMATION
Plastic Pitsetter - (<i>PDVHH-488-xx-xx-NL style</i>)



MALE IRON PIPE THREAD INLET AND OUTLET - FOR 1" METER

DOUBLE LID - ANGLE KEY METER VALVE INLET BY ANGLE DUAL CHECK VALVE OUTLET

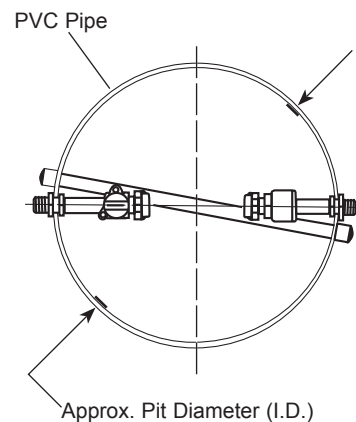

Note: "D" stands for Double Lid Cover

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (UNS C89833)
- The products has the letters "NL" cast into the body for proper identification
- Brass components that do not come in contact with potabewater conform to AWWA Standard C800 (ASTM B-62 and ASTM B584, UNS C83600-85-5-5-5)
- ASSE 1024 Approved Dual Check Valve.
- All Ford Setters are assembled with lead-free solder.
- Meter is held rigidly and at the proper height for easy installation and removal.
- Meter Box Cover not included. Must be ordered separately.
- Service lines are a minimum of 2" from pit walls to prevent "frost jump" in colder climates.
- Easy installation - simply make inlet and outlet connections and install cover.
- When bottom of pit is below frost line, service and meter freeze-ups are greatly reduced or eliminated by the circulation of air from the warmer soil at the pit base.

FORD **The Ford Meter Box Company, Inc.**
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
<http://www.fordmeterbox.com> 02/20/13

Submitted By: