
SUBMITTAL INFORMATION





3/4" MALE IRON PIPE THREAD INLET AND OUTLET - FOR 5/8" X 3/4" METER

FLAT COVER* - ANGLE KEY VALVE INLET AND OUTLET

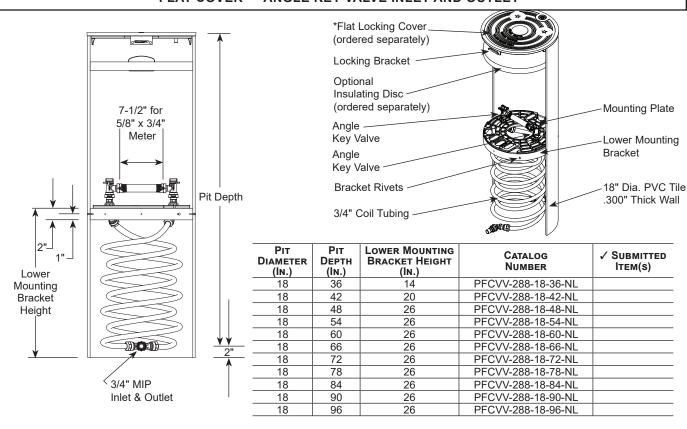

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- · The product has the letters "NL" cast into the main body for lead-free identification
- Bras's components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM `` B584, UNS C83600, 85-5-5-5)
- Lightweight body is made from PVC tile, per ASTM D2241
 HDPE coil tubing, per ASTM D2737, SDR 9 CTS sized
 Coil complies with AWWA C901

- Coil is ANSI/NSF 61 Certified
- Coil is rated at 250 PSIG working pressure
- · Allows meter to be raised for meter access and lowered below the frost line to prevent meter and service line freeze-ups in
- · Inlet and outlet valves are secured to a slotted, adjustable mounting plate
- Upper and lower mounting brackets secure the position of the mounting plate
- · Male iron pipe service line connections are clearly identified for quick and easy installation
- Coil pits ship with a plastic idler to maintain meter spacing and alignment during transportation and installation *Flat cast iron cover, per ASTM A48, Class 25 (see PPSC lids in catalog section FA, ordered separately)
- Optional: Closed-cell polyethylene foam disc provides additional freezing protection (See CCID's in catalog section FA, ordered separately)

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

Submitted By:

10/31/25