



# SUBMITTAL INFORMATION

## Pretzelhorn - (PHVBHC-2-R-NL style)



BALL VALVE INLET BY DUAL CARTRIDGE CHECK VALVE OUTLET

PRETZELHORN WITHOUT SERVICE LINE CONNECTIONS (PACK JOINT ASSEMBLIES ORDERED SEPARATELY)

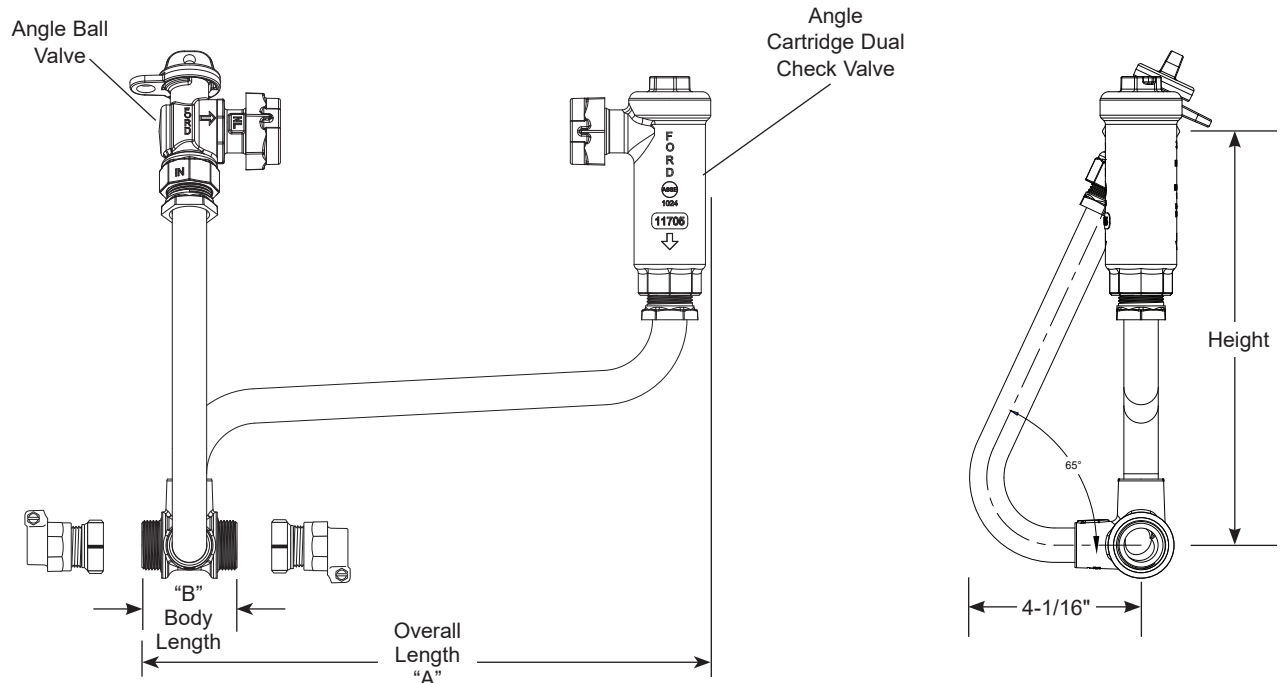

METER SIZE	METER SPACING (IN.)	BODY THREAD	COPPER SIZE (O.D.)	HEIGHT (IN.)	OVERALL LENGTH "A" (IN.)	BODY LENGTH "B" (IN.)	APPROX. WT. LBS	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
5/8"x3/4"	7-1/2	3/4" KH	13/16"	9-25/32	13-7/16	2-1/4	5.1	PHVBHC-2-R-NL	

### FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Certified to NSF/ANSI/CAN Standard 61 and NSF/ANSI/CAN Standard 372 where applicable
- Copper conforms to ASTM B75 or B88, UNS C12200
- All Ford® Setters are assembled with lead-free solder
- Permanent electrical bonding is provided without straps
- Copper tubing with full diameter bends provides excellent flow capacity
- Pretzelhorns position the meter to the right of the body
- Optional detachable Pack Joint Assemblies and valves must be ordered separately
- ASSE 1024 approved cartridge dual check valve

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



### The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

[www.fordmeterbox.com](http://www.fordmeterbox.com)

11/19/24

Submitted By: