



SUBMITTAL INFORMATION

Tandem Coil Pitsetter - (PXFCBHH-288-18-xxA-FP-NL style)



**1" MALE IRON PIPE THREAD INLET AND OUTLET WITH 1" TUBING
FOR MIP SERVICE CONNECTIONS FOR 5/8" x 3/4" METER**

**FLAT COVER* - FULL PORT ANGLE BALL VALVE INLET
BY ANGLE CASCADING DUAL CHECK VALVE OUTLET**

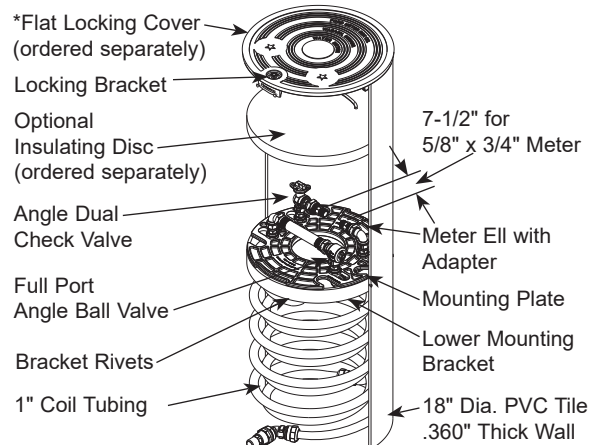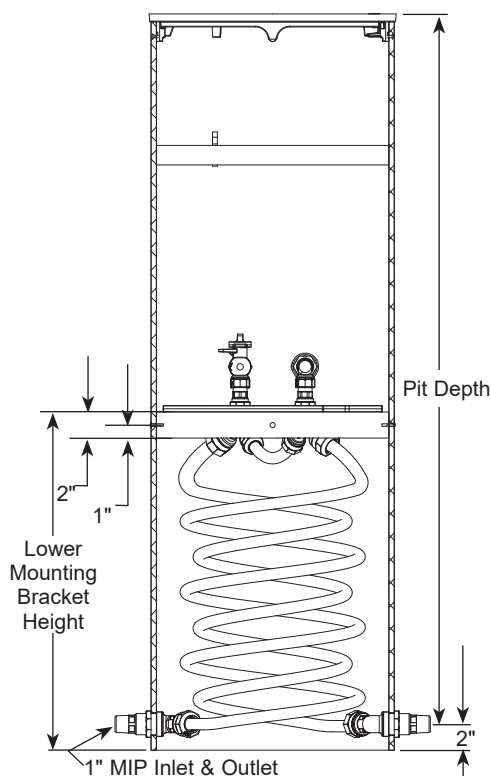

PIT DIAMETER AND DEPTH	LOWER MOUNTING BRACKET HEIGHT	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
18" x 36"	14"	PXFCBHH-288-18-36A-FP-NL	
18" x 42"	20"	PXFCBHH-288-18-42A-FP-NL	
18" x 48"	26"	PXFCBHH-288-18-48A-FP-NL	
18" x 54"	26"	PXFCBHH-288-18-54A-FP-NL	
18" x 60"	26"	PXFCBHH-288-18-60A-FP-NL	
18" x 66"	26"	PXFCBHH-288-18-66A-FP-NL	
18" x 72"	26"	PXFCBHH-288-18-72A-FP-NL	
18" x 76"	26"	PXFCBHH-288-18-76A-FP-NL	
18" x 78"	26"	PXFCBHH-288-18-78A-FP-NL	
18" x 84"	26"	PXFCBHH-288-18-84A-FP-NL	
18" x 90"	26"	PXFCBHH-288-18-90A-FP-NL	
18" x 96"	26"	PXFCBHH-288-18-96A-FP-NL	

PRV Length

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Brass products certified to NSF/ANSI/CAN Standard 61
- Copper conforms to ASTM B75 or B88, UNS C12200
- All Ford® Setters are assembled with lead-free solder
- Meter is held rigidly and at the proper height for easy installation and removal.
- Meter Box Cover not included. Must be ordered separately.
- Service lines are a minimum of 2" from pit walls to prevent "frost jump" in colder climates.
- Easy installation - simply make inlet and outlet connections and install cover.
- When bottom of pit is below frost line, service and meter freeze-ups are greatly reduced or eliminated by the circulation of air from the warmer soil at the pit base.
- Body is made from 18" PVC tile and is lightweight for easy installation
- 1" coil tubing allows meter to be raised for meter access and lowered below the frost line to prevent meter and service line freeze-ups in colder climates
- Inlet and outlet valves are secured to a slotted, adjustable mounting plate
- Upper and lower mounting brackets secure the position of the mounting plate
- Male iron pipe service line connections are clearly identified for quick and easy installation
- ASSE 1024 approved dual check valve
- Shipped with plastic idlers to maintain meter spacing, PRV spacing and alignment during transportation and installation
- *Flat cast iron locking cover, per ASTM A48, Class 25 (Part number: PPSC-18-L, ordered separately)
- Optional: Closed-cell polyethylene foam disc provides additional freezing protection (Part number: CCID-18 ordered separately)

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

05/07/24

Submitted By: