




SUBMITTAL INFORMATION

Restrained Coupling for Ductile Iron Pipe - (RCDD-xx-Q-I style)

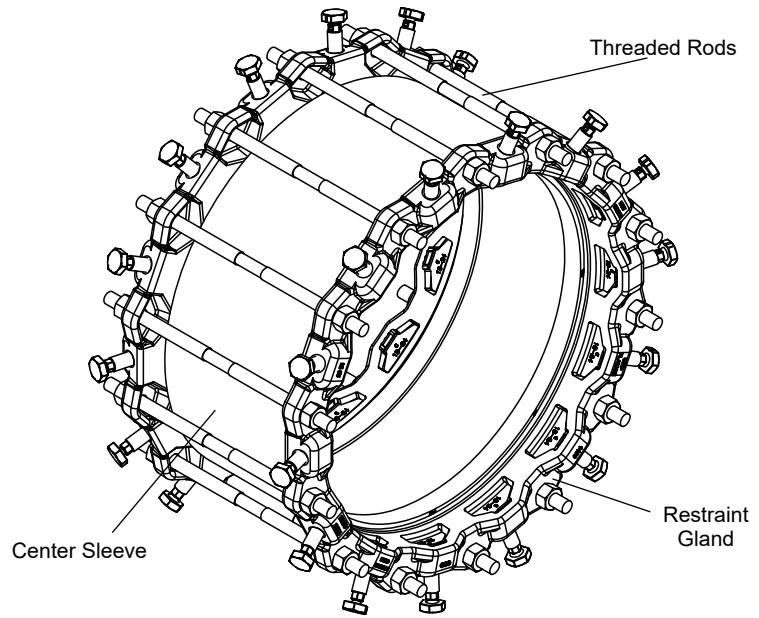

14" - 36" RESTRAINED COUPLING FOR DUCTILE IRON PIPE WITH TYPE 316 STAINLESS STEEL

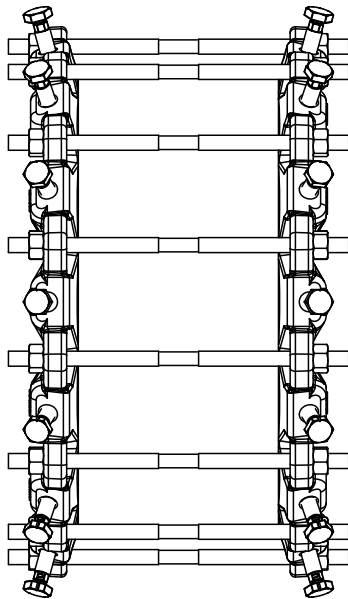

NOMINAL PIPE SIZE	PIPE O.D. RANGE (INCHES)	SLEEVE LENGTH	DEGREES DEFLECTION	No. OF RODS	SIZE OF RODS	APPROX. WT. LBS	PART NUMBER	✓ SUBMITTED ITEM(S)
14"	15.30	10"	3°	10	3/4" x 17"	173	RCDD-14-Q-I	
16"	17.40	10"	3°	12	3/4" x 17"	200	RCDD-16-Q-I	
18"	19.50	10"	3°	12	3/4" x 17"	230	RCDD-18-Q-I	
20"	21.60	10"	3°	14	3/4" x 17"	260	RCDD-20-Q-I	
24"	25.80	10"	3°	16	3/4" x 17"	320	RCDD-24-Q-I	
30"	32.00	10"	1°	20	1" x 20"	580	RCDD-30-Q-I	
36"	38.30	10"	1°	24	1" x 20"	654	RCDD-36-Q-I	

FEATURES

- Center Sleeve - Carbon steel per ASTM A36, NSF 61 approved black shop coat
- Restraint Gland Ends - Ductile iron per ASTM A536, Grade 65-45-12, NSF 61 approved black e-coat epoxy
- Double End Rod & Nuts - Type 316 stainless steel per ASTM A193 and A194
- Rated at 350 psi for 14" and 16" and 250 psi for 18" - 36" with a minimum 2:1 safety factor
- Gaskets - SBR Rubber per ASTM D2000
- Complies with AWWA C219

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

07/24/20

Submitted By: