




SUBMITTAL INFORMATION

Restrained Coupling for Ductile Iron Pipe - (RCDD-xx-Y-U100 style)

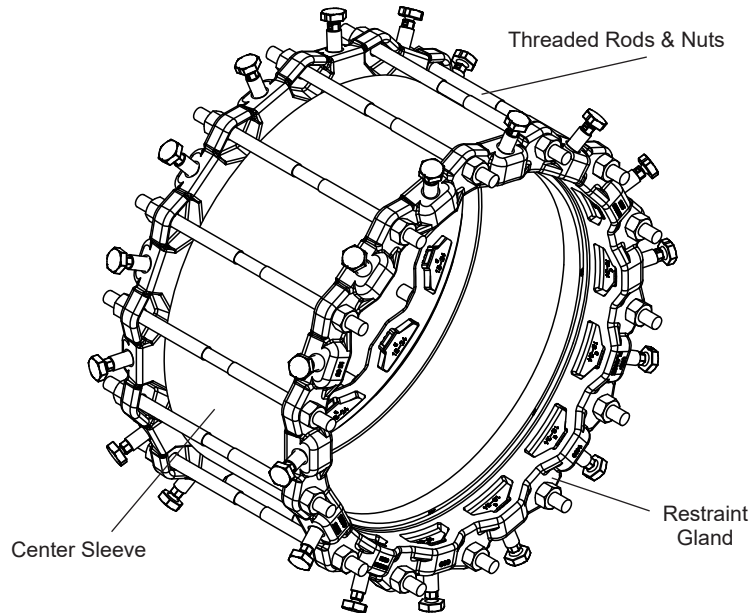

RESTRAINED COUPLING FOR DUCTILE IRON PIPE

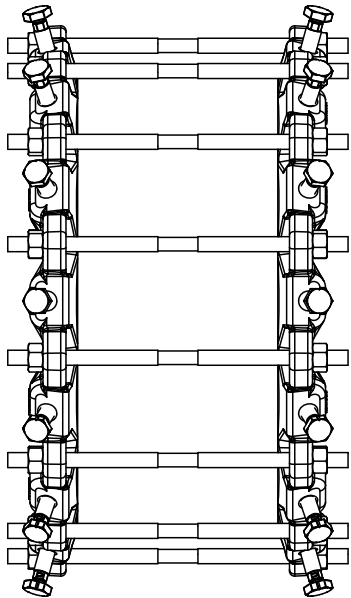

NOMINAL PIPE SIZE	PIPE O.D. RANGE (INCHES)	SLEEVE LENGTH	DEGREES DEFLECTION	NO. OF RODS	SIZE OF RODS	APPROX. WT. LBS	PART NUMBER	✓ SUBMITTED ITEM(S)
10"	11.10	7"	5°	6	3/4" x 17"	130	RCDD-10-Y-U100	
12"	13.20	7"	5°	8	3/4" x 17"	150	RCDD-12-Y-U100	
14"	15.30	10"	3°	10	3/4" x 17"	173	RCDD-14-Y-U100	
16"	17.40	10"	3°	12	3/4" x 17"	200	RCDD-16-Y-U100	
18"	19.50	10"	3°	12	3/4" x 17"	230	RCDD-18-Y-U100	
20"	21.60	10"	3°	14	3/4" x 17"	260	RCDD-20-Y-U100	
24"	25.80	10"	3°	16	3/4" x 17"	320	RCDD-24-Y-U100	
30"	32.00	10"	1°	20	1" x 20"	580	RCDD-30-Y-U100	
36"	38.30	10"	1°	24	1" x 20"	654	RCDD-36-Y-U100	

FEATURES

- Center Sleeve - Carbon steel per ASTM A36, fusion bonded epoxy coating
- Restraint Gland Ends - Ductile iron per ASTM A536, Grade 65-45-12, e-coat epoxy coating
- Double End Rod & Nuts - Type 304 stainless steel per ASTM A193 and A194
- Gaskets - SBR Rubber per ASTM D2000
- Rated at 350 psi for 10"-16" and 250 psi for 18"-36" with a minimum 2:1 safety factor, not to exceed pressure rating of pipe
- Complies with AWWA C219
- Certified to NSF/ANSI 61
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

10/11/23

Submitted By: