



# SUBMITTAL INFORMATION

## Restrained Coupling - (RCDP-x-E-U style)



3"-8" STYLE RCDP FOR JOINING PIPES OF THE SAME NOMINAL SIZE

FOR JOINING DUCTILE IRON PIPE TO C900, IPS PVC, STEEL, C909, HDPE AND SDR35 PIPE

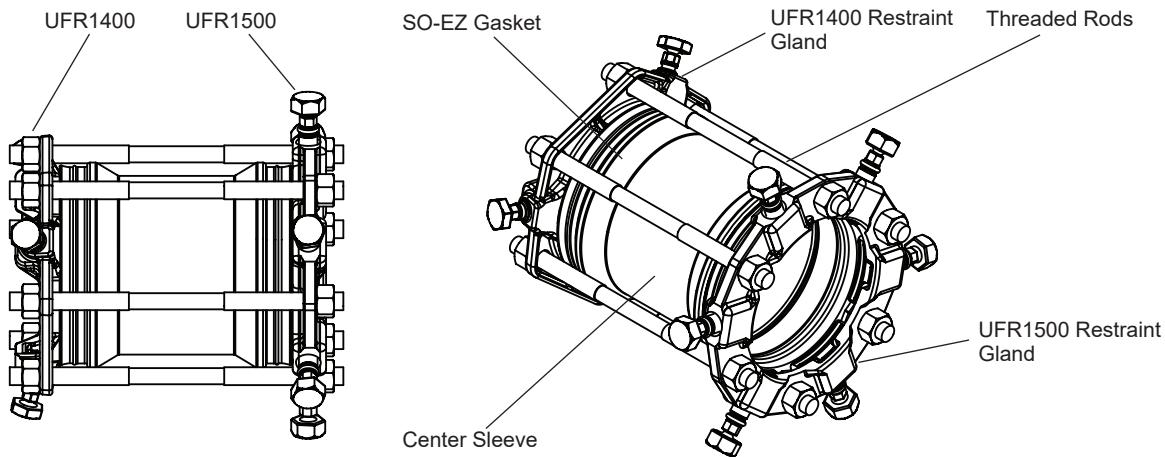

NOMINAL PIPE SIZE	PIPE O.D. RANGE FOR UFR1400 (IN.)	PIPE O.D. RANGE FOR UFR1500 (IN.)	SLEEVE LENGTH	DEGREES DEFLECTION	NO. OF RODS	SIZE OF RODS	APPROX. WT. LBS	PART NUMBER	✓ SUBMITTED ITEM(S)
3"	3.96	3.50	7-1/2"	5°	4	5/8" x 14"	31	RCDP-3-E-U	
4"	4.80	4.21 - 4.80	7-1/2"	5°	4	3/4" x 14"	38	RCDP-4-E-U	
6"	6.90	6.27 - 6.90	7-1/2"	5°	6	3/4" x 14"	55	RCDP-6-E-U	
8"	9.05	8.40 - 9.05	7-1/2"	5°	6	3/4" x 14"	66	RCDP-8-E-U	

### FEATURES

- Center Sleeve - Ductile iron per ASTM A536, fusion bonded epoxy coated
- Restraint Glands - Ductile iron per ASTM A536, epoxy coated via the e-coat process UFR1500 has red top coat for identification
- Double Ended Rods & Nuts - High strength, low alloy steel per ASTM A242 and AWWA C111 (Optional: Blue fluorocarbon or stainless steel)
- Gaskets - SO-EZ gaskets, pre-lubricated SBR rubber to accommodate listed ranges. Optional: NBR (Buna-N) rubber (required for sewer applications)
- Stab fit, no disassembly required
- Can be used to connect ductile iron pipe with any thickness class AWWA C900 and C909 PVC, ASTM D2241 IPS PVC, Steel Pipe or SDR35 Sewer Pipe. Also connects ductile iron pipe with HDPE pipe if a stainless steel insert is used
- Auto-Tork actuating screws with heads specially designed to twist off at the correct installation torque
- Rated at the same pressure rating as the pipe on which it is installed with a 2:1 safety factor
- Complies with AWWA C219

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
[www.fordmeterbox.com](http://www.fordmeterbox.com)

Submitted By: