



# SUBMITTAL INFORMATION

## Restrained Coupling - (RCDP-x-M-I style)



RCDP FOR JOINING PIPES OF THE SAME NOMINAL SIZE

FOR JOINING DUCTILE IRON PIPE TO C900, IPS PVC, STEEL, C909, HDPE AND SDR35 PIPE

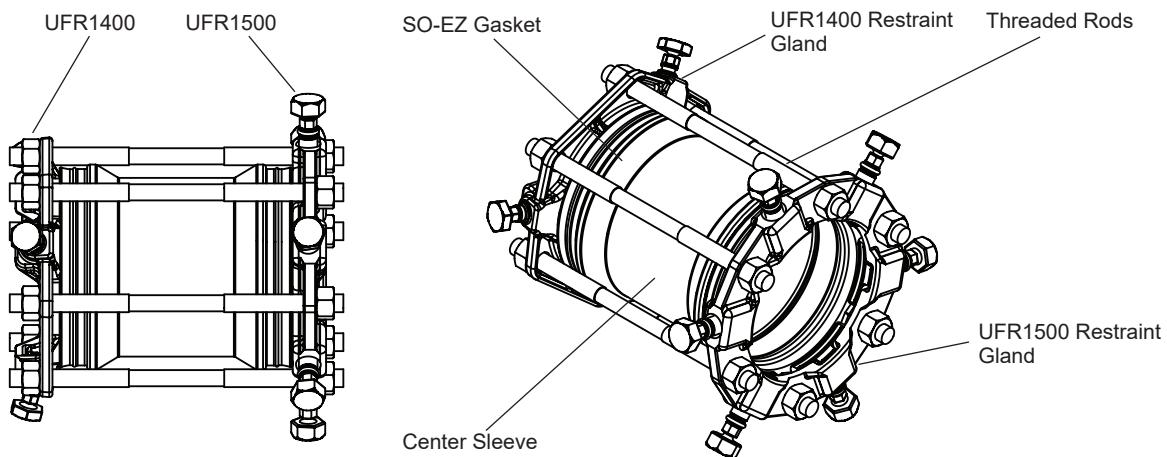

NOMINAL PIPE SIZE (IN.)	PIPE O.D. RANGE FOR UFR1400 (IN.)	PIPE O.D. RANGE FOR UFR1500 (IN.)	SLEEVE LENGTH (IN.)	DEGREES DEFLECTION	NO. OF RODS	SIZE OF RODS (IN.)	APPROX. Wt. LBS	PART NUMBER	✓ SUBMITTED ITEM(S)
3	3.96	3.50	7-1/2	2°	4	5/8 x 14	35	RCDP-3-M-I	
4	4.80	4.21 - 4.80	7-1/2	5°	4	3/4 x 14	38	RCDP-4-M-I	
6	6.90	6.27 - 6.90	7-1/2	5°	6	3/4 x 14	54	RCDP-6-M-I	
8	9.05	8.40 - 9.05	7-1/2	5°	6	3/4 x 14	67	RCDP-8-M-I	
10	11.10	10.50 - 11.10	7-1/2	5°	8	3/4 x 14	89	RCDP-10-M-I	
12	13.20	12.50 - 13.20	7-1/2	5°	8	3/4 x 14	103	RCDP-12-M-I	

### FEATURES

- Center Sleeve - Ductile iron per ASTM A536, fusion bonded epoxy coated
- Restraint Glands - Ductile iron per ASTM A536, epoxy coated via the e-coat process UFR1500 has red top coat for identification
- Double End Rods & Nuts - Type 304 stainless steel per ASTM A193 and A194
- Gaskets - SO-EZ gaskets EPDM rubber to accommodate listed ranges
- Stab fit, no disassembly required
- Can be used to connect ductile iron pipe with any thickness class AWWA C900 and C909 PVC, ASTM D2241 IPS PVC, Steel Pipe or SDR35 Sewer Pipe. Also connects ductile iron pipe with HDPE pipe if a stainless steel insert is used
- “Auto-Tork” actuating screws with heads specially designed to twist off at the correct installation torque
- Rated at the same pressure rating as the pipe on which it is installed with a 2:1 safety factor
- Complies with AWWA C219

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
 Phone: 260-563-3171 / Fax: 800-826-3487  
 Overseas Fax: 260-563-0167  
[www.fordmeterbox.com](http://www.fordmeterbox.com)

Submitted By: