



SUBMITTAL INFORMATION

Restrained Coupling for Ductile Iron & PVC Pipe - (RCDP-xx-E-U style)



RESTRAINED COUPLING FOR JOINING DUCTILE IRON PIPE TO AWWA C900 PVC PIPE

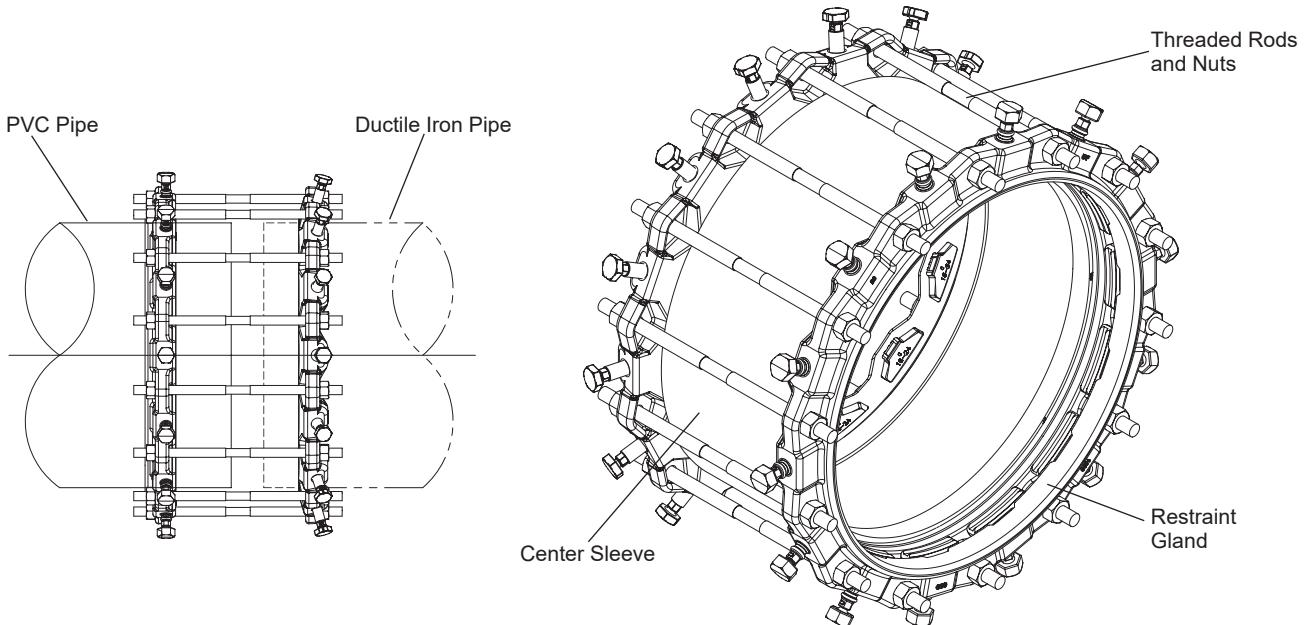

NOMINAL PIPE SIZE	PIPE O.D. RANGE FOR UFR1400 (IN)	PIPE O.D. RANGE FOR UFR1500 (IN)	SLEEVE LENGTH	DEGREES DEFLECTION	NO. OF RODS	SIZE OF RODS	APPROX. WT. LBS	PART NUMBER	✓ SUBMITTED ITEM(S)
10"	11.10	10.50-11.10	7"	5°	6	3/4" x 17"	130	RCDP-10-E-U	
12"	13.20	12.50-13.20	7"	5°	8	3/4" x 17"	150	RCDP-12-E-U	
14"	15.30	15.30	10"	3°	10	3/4" x 17"	180	RCDP-14-E-U	
16"	17.40	17.40	10"	3°	12	3/4" x 17"	210	RCDP-16-E-U	
18"	19.50	19.50	10"	3°	12	3/4" x 17"	250	RCDP-18-E-U	
20"	21.60	21.60	10"	3°	14	3/4" x 17"	285	RCDP-20-E-U	
24"	25.80	25.80	10"	3°	16	3/4" x 17"	360	RCDP-24-E-U	
30"	32.00	32.00	10"	1°	20	1" x 20"	550	RCDP-30-E-U	
36"	38.30	38.30	10"	1°	24	1" x 20"	650	RCDP-36-E-U	

FEATURES

- Center Sleeve - Carbon steel per ASTM A36, fusion bonded epoxy coated
- Ductile Iron Restraint Gland - Ductile iron per ASTM A536, Grade 65-45-12, e-coat epoxy
- PVC Restraint Gland End - Ductile iron per ASTM A536, e-coat epoxy with red top coat
- Double End Rod & Nuts - High strength, low alloy steel per ASTM A242 and AWWA C111
- Gaskets - SBR rubber per ASTM D2000
- Rated at 350 psi for 10"-16" and 250 psi for 18"-36" with a minimum 2:1 safety factor not to exceed pressure rating of pipe
- Complies with AWWA C219
- Certified to ANSI/NSF Standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
www.fordmeterbox.com

Submitted By: