



SUBMITTAL INFORMATION

Restrained Coupling for PVC Pipe - (RCPP-xx-Y-U style)



RESTRAINED COUPLING FOR AWWA C900, C909 OR HDPE PIPE WITH EPOXY COATING
AND 304 STAINLESS STEEL HARDWARE

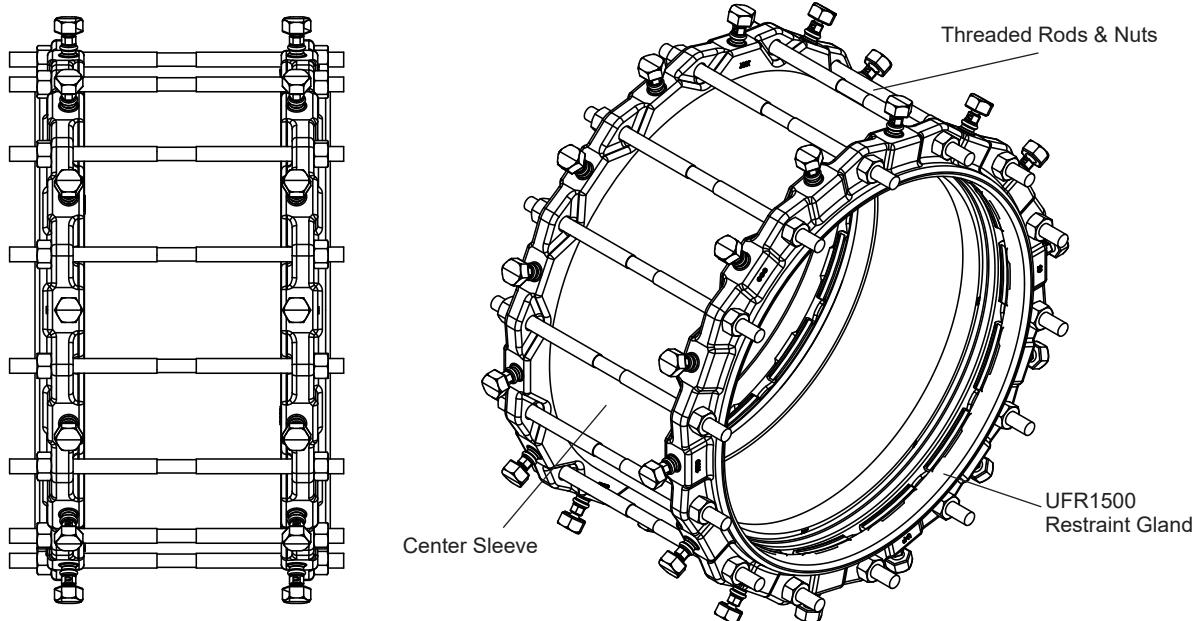

NOMINAL PIPE SIZE	PIPE O.D. RANGE (INCHES)	SLEEVE LENGTH	DEGREES DEFLECTION	NO. OF RODS	SIZE OF RODS	APPROX. WT. LBS	PART NUMBER	✓ SUBMITTED ITEM(S)
10"	10.50-11.10	7"	5°	6	3/4" x 17"	130	RCPP-10-Y-U	
12"	12.50-13.20	7"	5°	8	3/4" x 17"	150	RCPP-12-Y-U	
14"	15.30	10"	3°	10	3/4" x 17"	185	RCPP-14-Y-U	
16"	17.40	10"	3°	12	3/4" x 17"	230	RCPP-16-Y-U	
18"	19.50	10"	3°	12	3/4" x 17"	270	RCPP-18-Y-U	
20"	21.60	10"	3°	14	3/4" x 17"	310	RCPP-20-Y-U	
24"	25.80	10"	3°	16	3/4" x 17"	400	RCPP-24-Y-U	
30"	32.00	10"	1°	20	1" x 20"	520	RCPP-30-Y-U	
36"	38.30	10"	1°	24	1" x 20"	640	RCPP-36-Y-U	

FEATURES

- Center Sleeve - Carbon steel per ASTM A36, fusion bonded epoxy coating
- Restraint Gland Ends - Ductile iron per ASTM A536, e-coat epoxy with red top coat
- Double End Rod & Nuts - Type 304 stainless steel per ASTM A193 and A194
- Gaskets - SBR rubber per ASTM D2000
- Rated for the same as pipe on which it is installed with a 2:1 safety factor
- May be used on ductile sized HDPE with an approved insert
- Complies with AWWA C219
- Certified to NSF/ANSI 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

Submitted By: