

SUBMITTAL INFORMATION





FULL PORT ANGLE BALL VALVE INLET BY ANGLE CARTRIDGE DUAL CHECK VALVE OUTLET

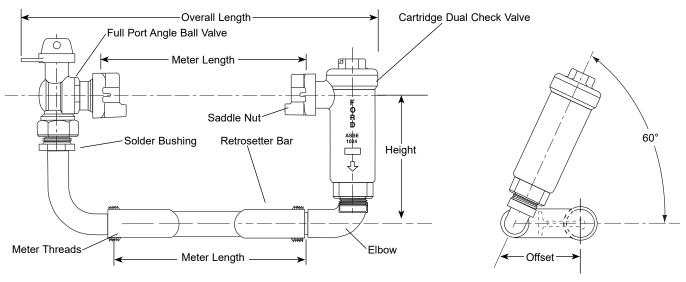

METER	METER	OVERALL	APPROX.	OFFSET	Approx.	CATALOG	✓ SUBMITTED
SIZE	LENGTH	LENGTH	HEIGHT	OFFSEI	Wt. LBS.	Number	ITEM(S)
5/8"	7-1/2"	13"	4-1/4"	2-1/2"	5.5	RETRO-1CVBHC-60-FP-NL	
5/8"x3/4"	7-1/2"	13"	4-1/4"	2-1/2"	5.7	RETRO-2CVBHC-60-FP-NL	
3/4"	9"	14-1/2"	4-1/4"	2-1/2"	6.6	**RETRO-3CVBHC-60-FP-NL	
1"	10-1/2"	17"	4-1/2"	3-3/8"	10.1	*RETRO-4CVB3HC-60-FP-NL	
1"	10-1/2"	17-5/8"	5-1/2"	3-3/8"	10.8	RETRO-4CVBHC-60-FP-NL	

^{*} This Retrosetter is 1" throughout except the valves have 3/4" internal parts.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Style "C" Retrosetter offsets and raises the meter from the centerline of the service
- Saddle nuts hold the meter in place for tightening
- All Ford Retrosetters are assembled with lead-free solder
- Ford Retrosetters are furnished with four rubber gaskets, one for each meter nut and two for the bottom bar
- · Conforms to AWWA C700 for meter threads
- Dual check valve is ASSE 1024 approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167 www.fordmeterbox.com

09/21/17

Submitted By

^{**} Manufactured with 13/16" O.D. Tubing.