




# SUBMITTAL INFORMATION

## Restrained Flange Adapter - (RFAD-xxxx-ExxY-I style)

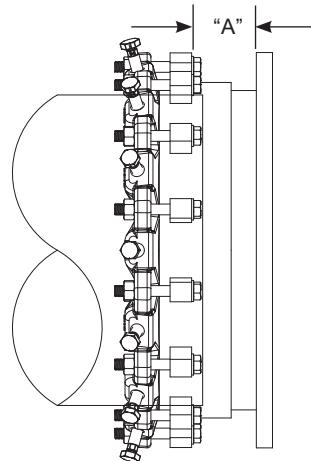

RESTRAINED ADAPTER FOR CONVERTING PLAIN END PIPE TO A FLANGE CONNECTION FOR DUCTILE IRON PIPE  
WITH 304 STAINLESS STEEL HARDWARE AND EPOXY COATING

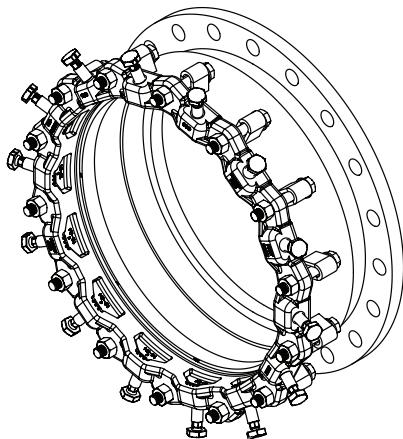

NOMINAL PIPE SIZE (IN.)	PIPE OD (IN.)	PART NUMBER	NUMBER OF RESTRAINT WEDGES	BOLT SIZE (IN.)	BOLT QTY	*MINIMUM PIPE INSERTION (IN.)	ANCHOR LOOP TO FLANGE "A" (IN.)	MAX. DEFLECTION ALLOWANCE	APPROX. Wt. LBS	✓ SUBMITTED ITEM(S)
14	15.30	RFAD-1530-E14Y-I	10	3/4 x 5-1/2	10	4-3/8	7-1/4	3°	135	
16	17.40	RFAD-1740-E16Y-I	12	3/4 x 5-1/2	12	4-7/16	7-3/4	3°	170	
18	19.50	RFAD-1950-E18Y-I	12	3/4 x 5-1/2	12	4-1/2	7-1/4	3°	185	
20	21.60	RFAD-2160-E20Y-I	14	3/4 x 5-1/2	14	4-9/16	9-1/4	3°	215	
24	25.80	RFAD-2580-E24Y-I	16	3/4 x 5-1/2	16	4-3/4	9-1/4	3°	275	
30	32.00	RFAD-3200-E30Y-I	20	1 x 6	20	5-7/16	9-1/4	1°	550	
36	38.30	RFAD-3830-E36Y-I	24	1 x 6	24	5-7/16	9-1/4	1°	680	

\*Not accounting for beveled, unsquare or deflected pipe ends

### FEATURES

- Sleeve - Carbon Steel per ASTM A36
- Flange - Class E AWWA C207
- Restraint gland - Ductile iron per ASTM A536, black e-coat epoxy
- Restraint actuating screws and wedges - Ductile iron per ASTM A536 with auto-tork break away head design, black e-coat epoxy
- Bolts and nuts - Type 304 stainless steel per ASTM A193 and A194
- Gasket - SBR Rubber per ASTM D2000
- Finish - Fusion bonded epoxy coating
- Rated at 250 PSI
- Certified to ANSI/NSF 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
[www.fordmeterbox.com](http://www.fordmeterbox.com)

Submitted By: