



# SUBMITTAL INFORMATION

## Restrained Flange Adapter - (RFAP-xx-Q-I style)



**RESTRAINED ADAPTER FOR CONVERTING PLAIN END PIPE TO A FLANGE CONNECTION  
FOR PVC, C909, STEEL, STAINLESS STEEL, HDPE OR SDR35 SEWER PIPE**

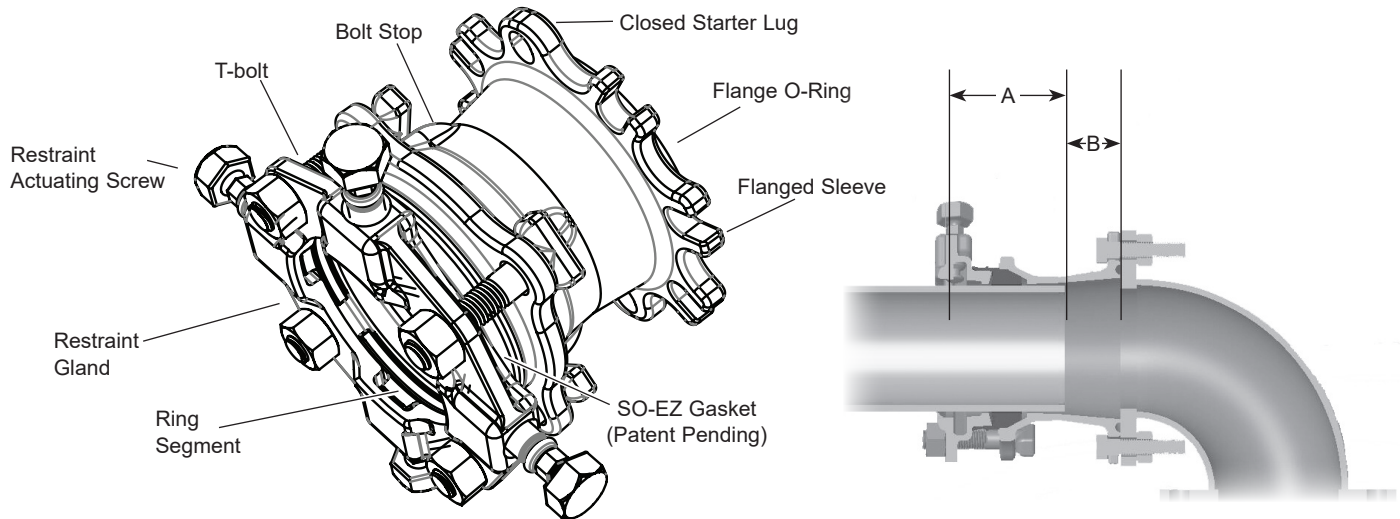

NOMINAL PIPE SIZE	PIPE OD (IN.)	PART NUMBER	NUMBER OF RESTRAINT WEDGES	T-BOLT SIZE	T-BOLT QUANTITY	*MINIMUM PIPE INSERTION DIMENSION "A"	PIPE ADJUSTABILITY DIMENSION "B"	MAX. DEFLECTION ALLOWANCE	APPROX. WT. LBS	✓ SUBMITTED ITEM(S)
3"	3.50	RFAP-3-Q-I	4	5/8" x 3"	4	4"	1-7/8"	5°	25	
4"	4.21 - 4.80	RFAP-4-Q-I	4	3/4" x 4"	4	4-5/8"	2"	5°	27	
6"	6.27 - 6.90	RFAP-6-Q-I	6	3/4" x 4"	6	4-3/4"	2-7/8"	5°	38	
8"	8.40 - 9.05	RFAP-8-Q-I	6	3/4" x 4-1/2"	6	4-13/16"	3"	5°	50	
10"	10.50 - 11.10	RFAP-10-Q-I	8	3/4" x 4-1/2"	8	4-7/8"	3-3/8"	3°	65	
12"	12.50 - 13.20	RFAP-12-Q-I	8	3/4" x 4-1/2"	8	4-7/8"	3-5/8"	3°	85	

\*Not accounting for beveled pipe ends

### FEATURES

- Flanged sleeve - Fusion bonded epoxy coated ductile iron per ASTM A536, Grade 65-45-12, compatible with Class D or Class E flange, per AWWA C207
- Restraint ring segments - E-coated ductile iron per ASTM A536
- Restraint gland - High strength, ductile iron, per ASTM A536, Grade 65-45-12, black E-coat base with red dusting
- Restraint actuating screws - E-coated ductile iron per ASTM A536, Grade 65-45-12, with auto-tork break away head design
- T-bolts and nuts - Type 316 stainless steel per ASTM A193 and A194
- Flange O-ring - NBR (Buna-N) rubber per ASTM D2000
- Restraint gasket - Pre-lubricated SBR rubber (SO-EZ gasket) to accommodate listed ranges.  
Optional: NBR (Buna-N) rubber
- Bolt stops are cast on sleeve to prevent tee-head bolt from turning during installation
- Closed starter lugs ease installation
- Stab fit; no disassembly required
- 4" - 12" are FM approved
- 2:1 safety factor at the full rated pressure of the pipe on which it is installed

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

05/17/23

Submitted By: