



SUBMITTAL INFORMATION

Angle Key Yoke Valves - (SI-AV92-xxxW-AWT-NL style)



FLARE COPPER INLET BY METER YOKE NOSE OUTLET WITH SERVICE INSULATOR, ASSEMBLED WATERTIGHT

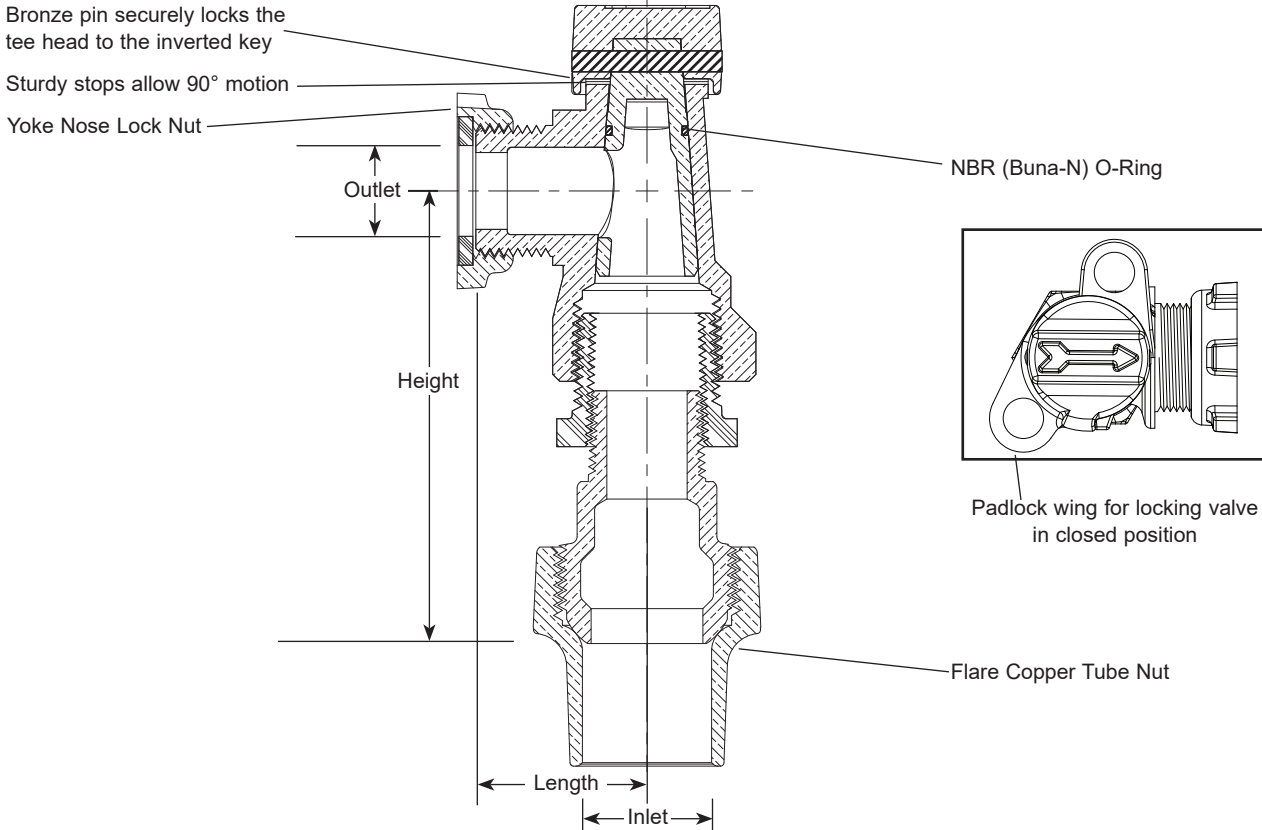

Due to design variations related to sizing, items may differ from images above.

| VALVE SIZE | INLET SIZE | OUTLET SIZE | LENGTH (IN.) | HEIGHT (IN.) | APPROX. WT. LBS | CATALOG NUMBER | ✓ SUBMITTED ITEM(S) |
|------------|------------|------------------|--------------|--------------|-----------------|---------------------|---------------------|
| 3/4" | 3/4" | 5/8" | 1-17/32 | 4-1/32 | 2.0 | SI-AV92-313W-AWT-NL | |
| 3/4" | 1" | 5/8"x3/4" & 3/4" | 1-17/32 | 4-1/16 | 2.2 | SI-AV92-324W-AWT-NL | |
| 1" | 1" | 1" | 2 | 5-29/32 | 3.6 | SI-AV92-444W-AWT-NL | |

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Meets 100 PSI working pressure requirement of AWWA Standard C800
- Padlock wing for locking the valve in a closed position
- EPDM rubber yoke nose gasket sold separately: GT-112 (5/8"), GT-118 (3/4") and GT-123 (1")
- Ends are integral or secured with adhesive to prevent unintentional disassembly
- **Optional Drain/Test Valve** is available. Add "D" to the catalog number. Ex: SI-AV92-313WD-AWT-NL

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

12/17/25

Submitted By: